

SPECIFICATION






Current Rating: 1 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black
 Contact Pin: Copper Alloy

ORDER INFORMATION

5 P H 3 M R A 1 5 - 1 X X X X N N X U - A 000 000 - 0 0

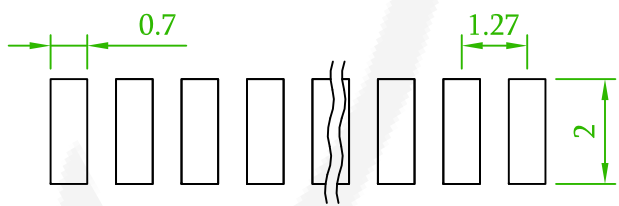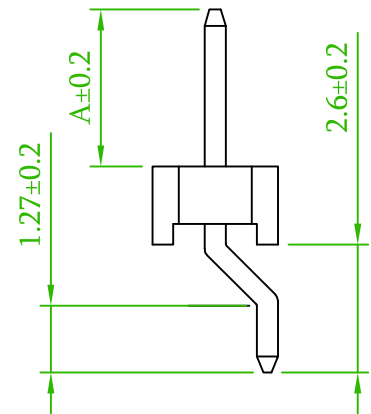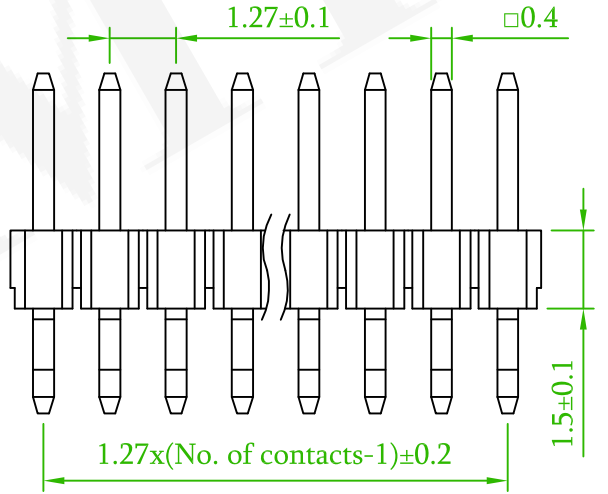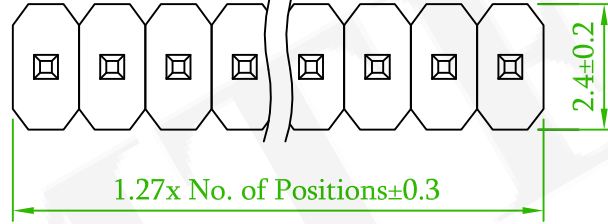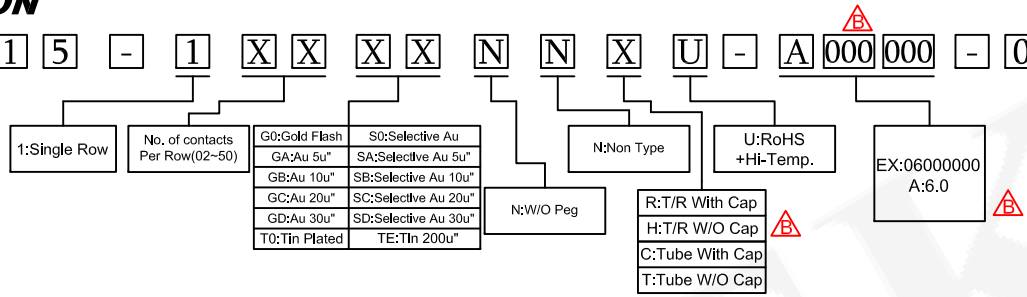

Recommended PCB Layout
 (PCB TOLERANCE ±0.1)

Old Part No. : PH3MR-1XX-U

REV.	Modify order information	B	2017/02/06 Gary
	ECN NO. OR DESCRIPTION	REVISED	DATE

Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 1.27mm S/R R/A SMT TYPE				頁數 Page	1/1
品號 PART NO.	5PH3MRA15- 1XXXXNXXU-XXX000000-00			繪圖 DRAWN	Roy 2015/08/11	
圖號 DRAWING NO.	GN016-GA276	版本 REV.	B	核對 CHECKED	John 2015/08/11	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/11	
公差 TOLERANCE	.X ± 0.20 .XX ± 0.15	.X° ± 3	單位 UNIT	mm	THIRD ANGLE PROJECTION	