

SPECIFICATION

Current Rating: 1 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C



MATERIAL

Insulator: Hi-Temp. Thermoplastic, UL 94V-0, Black
 Contact Pin: Copper Alloy

ORDER INFORMATION

5 P H 3 R D A 1 5 - 2 X X X X N N X U - A B C - 0 0

2: Dual Row	No. of contacts Per Row(02~50)	G0: Gold Flash	S0: Selective Au	N: Non Type	RoHS	EX: 065012020
		GA: 5u"	SA: 5u"			A: 6.5
		GB: 10u"	SB: 10u"	N: W/O Peg	X: Box	B: 1.2
		GC: 20u"	SC: 20u"		C: Tube With Cap	C: 2.0
		GD: 30u"	SD: 30u"		R: T/R With Cap	
		T0: Tin Plated	TE: Tin 200u"			

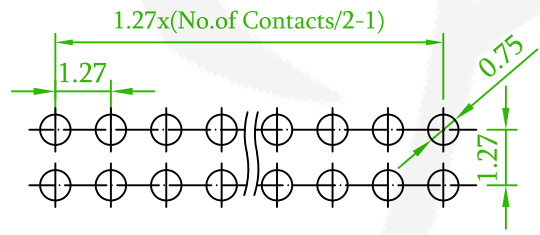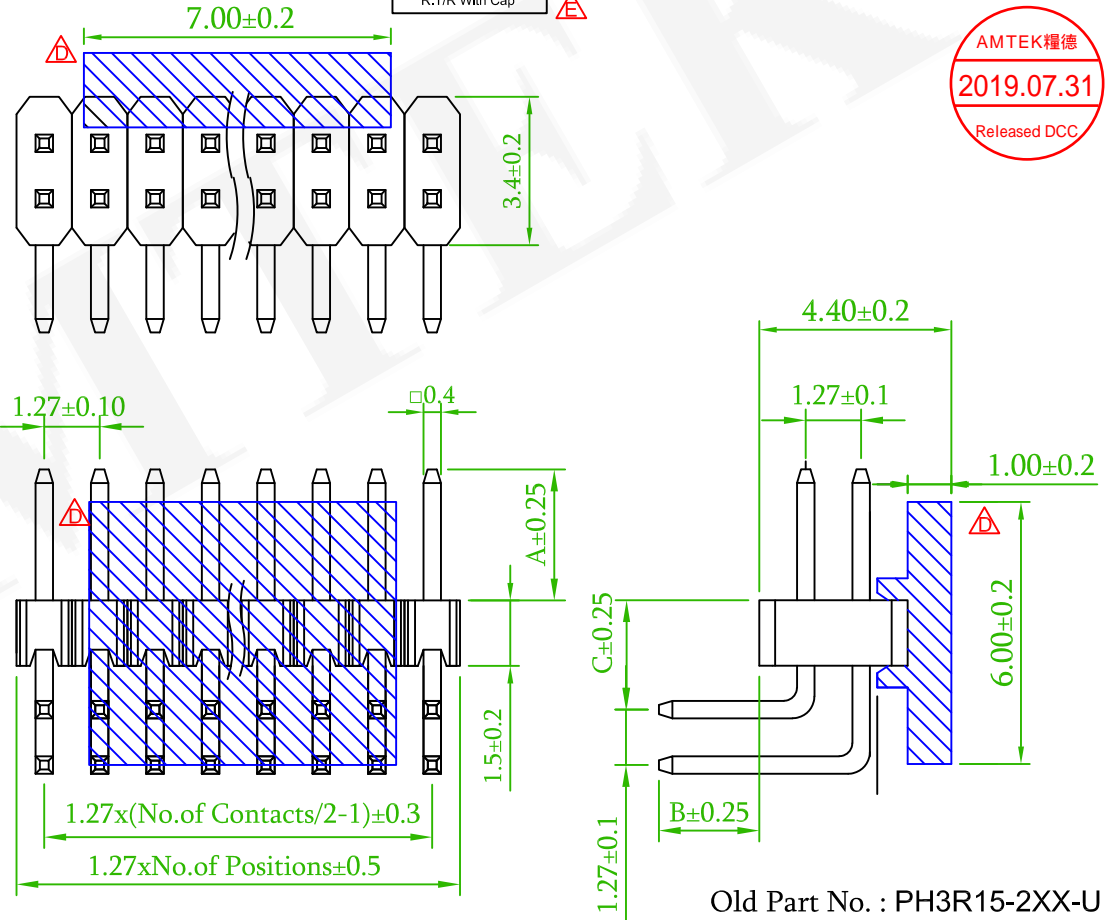

Recommended PCB Layout
 (PCB TOLERANCE ±0.1)

Old Part No. : PH3R15-2XX-U

△x1	Add : T/R With Cap	David	2019/07/30
△	Add : Cap	David	2019/03/21
△x1	ECN:170910,Delete the Packing:B:Bag	Kilin	2017/10/31
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

<p>耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030</p>	品名 TITLE	PIN HEADER 1.27mm			頁數 Page	1/1
	品號 PART NO.	5PH3RDA15-2XXXXNNU-XXXXXXXXXX-00			繪圖 DRAWN	Roy
	圖號 DRAWING NO.	GN016-GA288	版本 REV.	E	核對 CHECKED	John
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John
	公差 TOLERANCE	.X ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	☉
		.XX ± 0.20				