
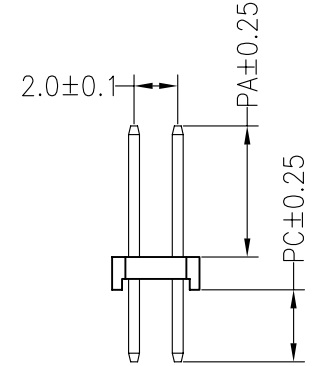
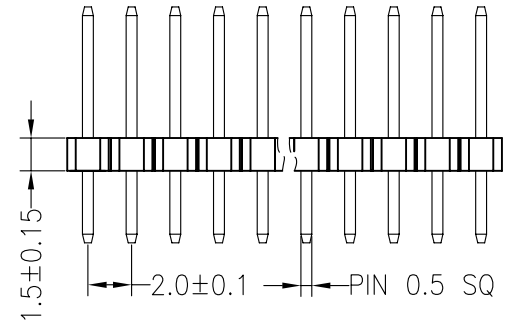
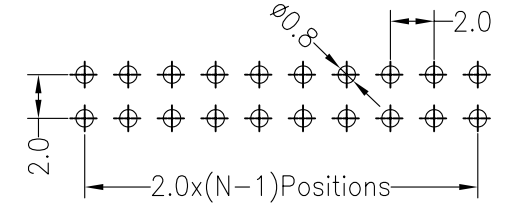


SPECIFICATIONS

Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: LCP
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 5 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

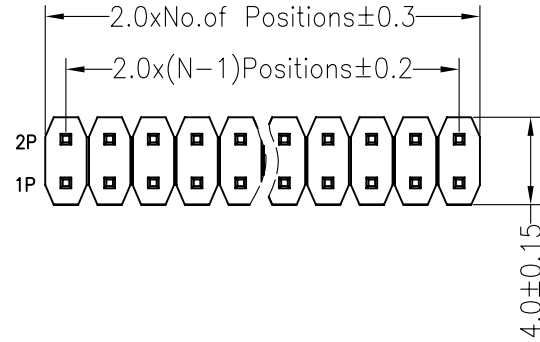

Dimension antitheses list			
ITEM	PC	PA	L
Alternate	2.6	5.5	9.6

				OPERATION		DRAW	YiYuSheng	12.04.11	SCALE	FIT	NINGBO KLS ELECTRONIC CO.,LTD	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK		SIZE	A4	PART NO.		
A0	2012.04.11	NEW DRAWING		X.XXX	±0.10	APPROVE			SHEET	1/1	TITLE:	2.0PH 2xNpin H1.5mm 180°
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	Angle	±3°			PROJ.	◆ ↗		