




**MATERIAL**

Insulator: Nylon9T, UL 94V-0, Black  
Contact Pin: Brass

**ORDER INFORMATION**

5 P H 3 R U A 1 5 - 2 X X X X N N B U - A B C - 0 0

|              |                                |  |   |            |       |   |
|--------------|--------------------------------|--|---|------------|-------|---|
| 1:Single Row | No. of contacts Per Row(02-50) | G0:Gold Flash<br>GA:5u"                        | S0:Selective Au<br>SA:5u"                     | N:Non Type | RoHS  | EX:040024030<br>A:4.0<br>B:2.4<br>C:3.0 |
|              |                                | GB:10u"<br>GC:20u"<br>GD:30u"<br>T0:Tin Plated | SB:10u"<br>SC:20u"<br>SD:30u"<br>TE:Tin 200u" | N:W/O Peg  | B:Bag |   |

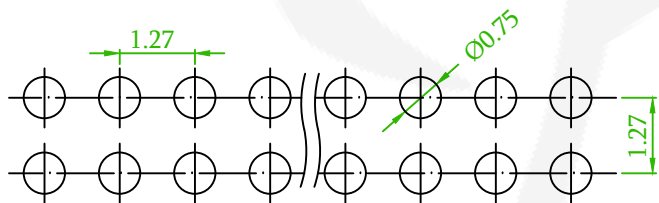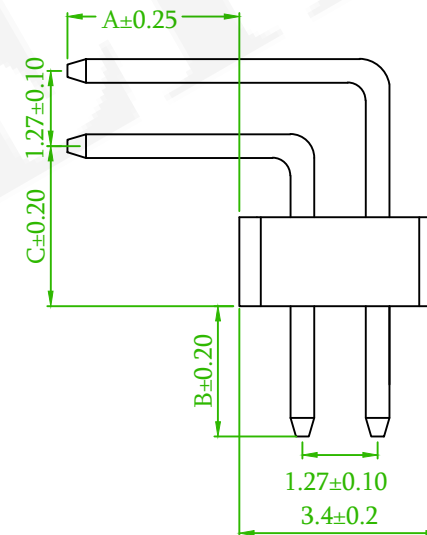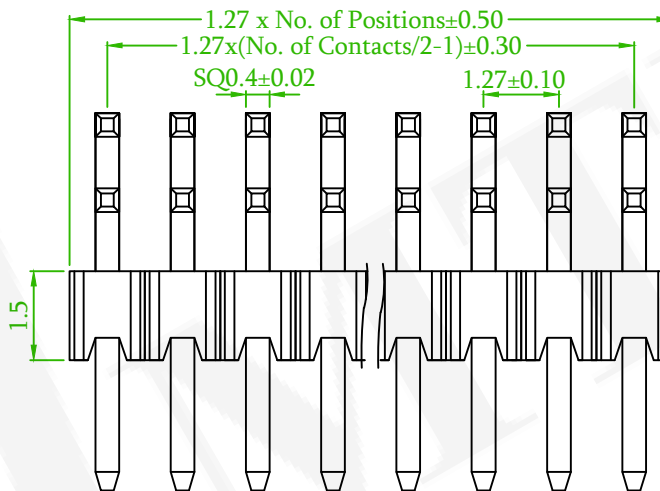

Recommended PCB Layout  
(PCB TOLERANCE ±0.05)

|   |                      |                         |             |             |                              |                    |  |
|---|----------------------|-------------------------|-------------|-------------|------------------------------|--------------------|--|
| <br><b>糧德精密有限公司</b><br>Amtek Technology Co., Ltd.<br>TEL: 886-2-2260-6878<br>FAX: 886-2-2260-8030 | 品名<br>TITLE          | PIN HEADER 1.27mm       |             |             | 頁數<br>Page                   | 1/1                |  |
|   | 品號<br>PART NO.       | 5PH3RUA15-2XXXXNNU-00   |             | 繪圖<br>DRAWN | Alice<br>2022/08/24          |                    |  |
|   | 圖號<br>DRAWING NO.    | GN110-AB560             | 版本<br>REV.  | A           | 核對<br>CHECKED                | Josh<br>2022/08/24 |  |
|   | 客戶品號<br>CUSTOMER P/N |                         | 比例<br>SCALE | None        | 承認<br>APPROVED               | Josh<br>2022/08/24 |  |
|   | 公差<br>TOLERANCE      | .X ± 0.38<br>.XX ± 0.25 | 單位<br>UNIT  | mm          | THIRD<br>ANGLE<br>PROJECTION |                    |  |

|      |                        |         |      |
|------|------------------------|---------|------|
| REV. | ECN NO. OR DESCRIPTION | REVISED | DATE |
|      |                        |         |      |