





**SPECIFICATIONS**

Rated Current:1.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

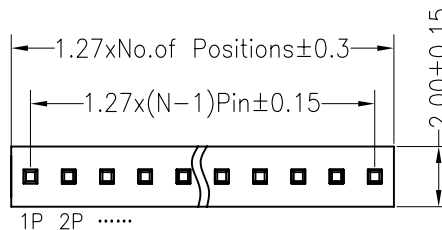

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

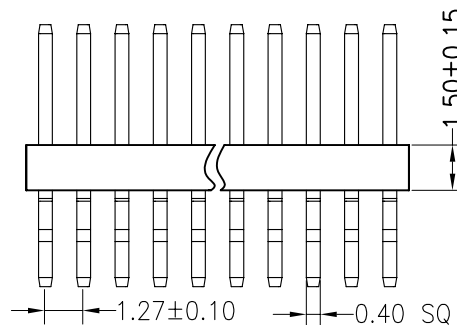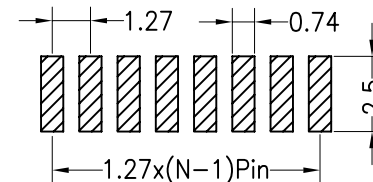

Dimension antitheses list		
ITEM	PA	L
Standard	4.00	8.80
Alternate		

OPERATION		DRAW	WZG	14.08.16	SCALE	FIT
X.X	±0.30				UNIT	mm
X.XX	±0.20	CHECK			SIZE	A4
X.XXX	±0.10				SHEET	1/1
Angle	±3°	APPROVE			PROJ.	◆
DIM	TOL					

**KLS ELECTRONIC CO., LTD**

PART NO. L-KLS1-207CA-1-11-TC-R

TITLE: 1.27PH 1xnPin H1.5 卧贴

A0	2012.08.19	NEW DRAWING					
REV	DATE	MODIFICATION DESCRIPTION		CHANGE			