

SPECIFICATIONS

ORDER INFORMATION

Current Rating: 3 AMP

5 P H 1 S D A 2 5 - 1 X X X X N N X L - A B 000 - 0 0

Insulation Resistance: 1000MΩ Min.

Contact Resistance: 20mΩ Max.






Dielectric Voltage: 500V AC for one minute

Operation Temperature: -25 °C to +85 °C

MATERIAL

Insulator: P.B.T, UL94V-0, Black

Contact Pin: Copper Alloy

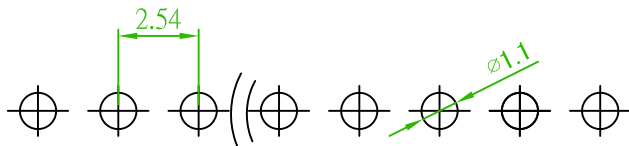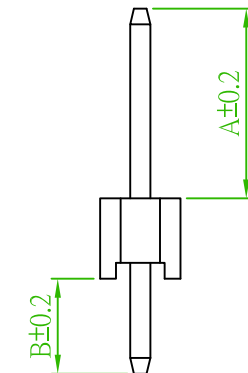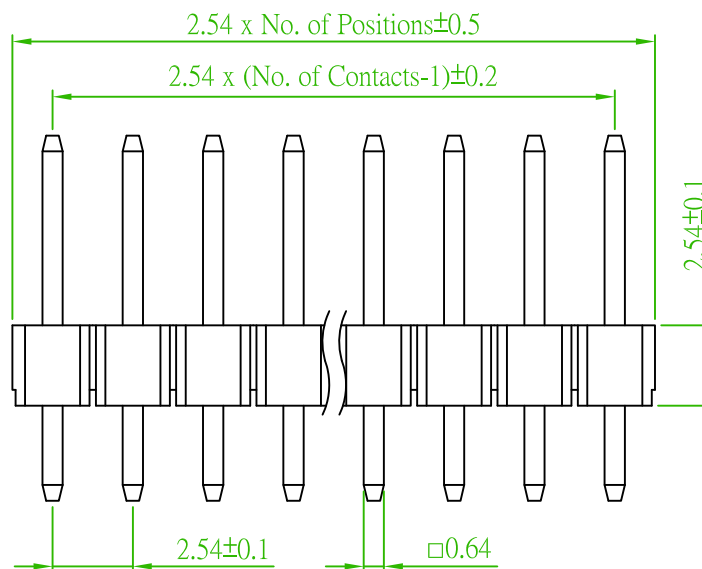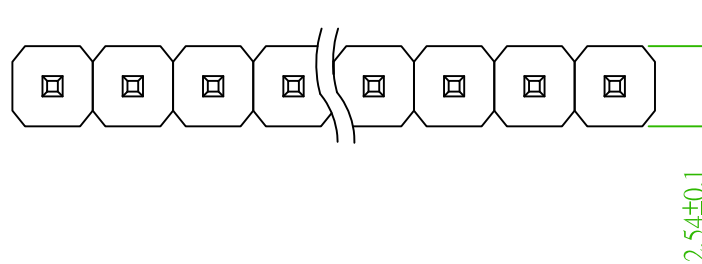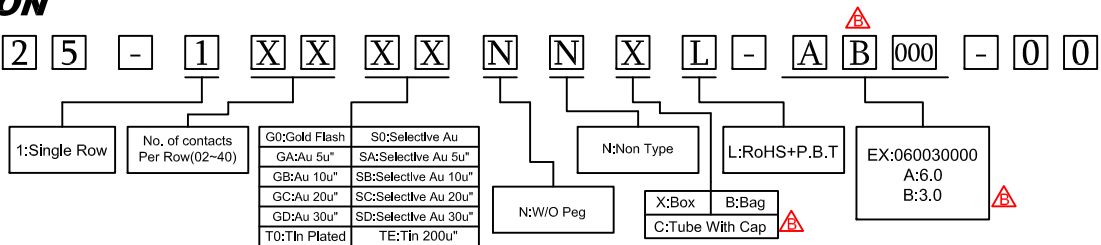

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

Old Part No. : PH1S25-1XX-L

REV.	Modify order information	B	2017/01/26 Gary
	ECN NO. OR DESCRIPTION	REVISED	DATE

<p>耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030</p>	品名 TITLE	PIN HEADER 2.54mm S/R V/T DIP TYPE			頁數 Page	1/1
	品號 PART NO.	5PH1SDA25-1XXXXNXXL -XXXXXX000-00			繪圖 DRAWN	Mia 2015/08/24
	圖號 DRAWING NO.	GN016-GA173	版本 REV.	B	核對 CHECKED	John 2015/08/24
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/24
	公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	.X° ± 3	單位 UNIT	mm	THIRD ANGLE PROJECTION