





**SPECIFICATIONS**

Rated Current:1.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

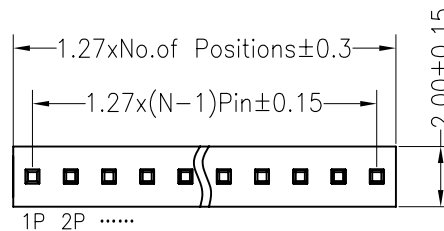

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

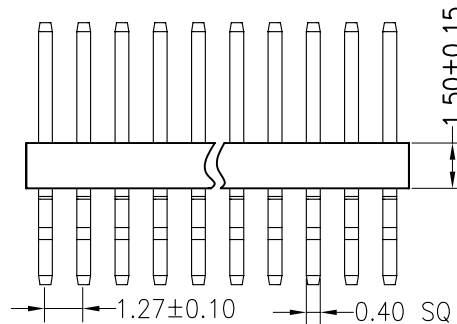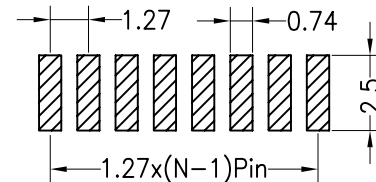

Dimension antitheses list		
ITEM	PA	L
Standard	4.00	8.80
Alternate		

OPERATION	DRAW	WZG	14.08.16	SCALE	FIT
X.X ±0.30	CHECK			UNIT	mm
X.XX ±0.20				SIZE	A4
X.XXX ±0.10	APPROVE			SHEET	1/1
Angle ±3°				PROJ.	☛
DIM	TOL				

**KLS ELECTRONIC CO., LTD**

PART NO. L-KLS1-207CA-1.5-1-08-RT

TITLE: 1.27PH 1xnPin H1.5 卧贴

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.08.19	NEW DRAWING	