
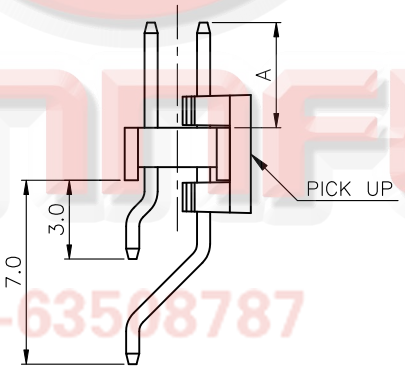
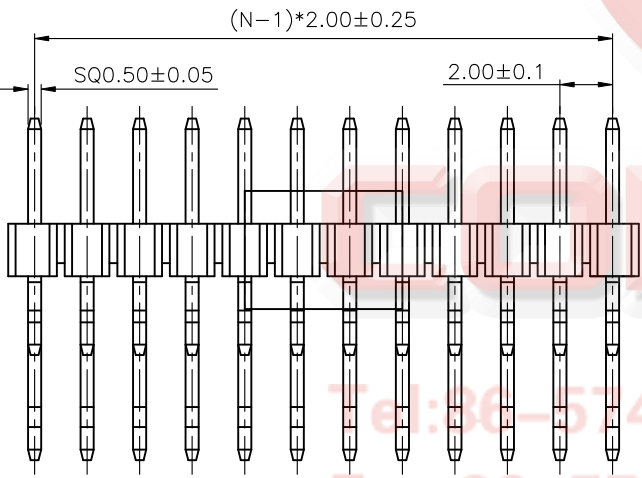


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 05/08/05'		LJC 05/08/05'
B	ADD P/N CODE	JLZ 10/28/14'		LJC 10/28/14'
C	HOUSING CHANGE	JLZ 07/06/15'		LJC 07/06/15'
D	DRAWING UPDATE	JLZ 07/16/16'		

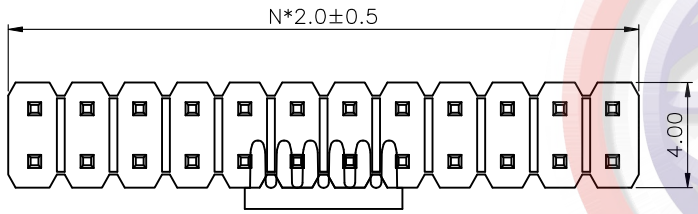


NOTES:

- MATERIAL&FINISHES
 - INSULATOR:THERMOPLASTIC(UL 94V-0).
 - CONTACT MATERIAL: COPPER ALLOY.
- SPECIFICATION
 - CURRENT RATING:1.5 Amp.
 - INSULATION RESISTANCE:1000MΩ Min.
 - DIELECTRIC WITHSTANDING:600VAC.
 - CONTACT RESISTANCE:20mΩ Max.
 - OPERATING TEMPERATURE:-40°C TO +105°C.
- PRODUCT NUMBER CODE:

DS1025-07 - X X X X X X X X - X

- PLATING LEVEL
3A:LEVEL 3A B:LEVEL B
- PACKING TYPE
R: TAPE ON REEL
N/A: TUBE
- PICK UP SUPPORT
S: W/ PICK UP
N/A: W/O PICK UP
- DIM A TYPE
1: TYPE 1
OR A*.*
- CONTACTS TYPE
S:SMT TYPE
- HOUSING COLOR
B:BLACK
- CONTACT PLATING
8: FULL GOLD FLASH
- CONNECTOR TYPE
P:PLUG
- No.OF CONTACTS
2*2-2*40

N: NUMBER OF CONTACTS/2

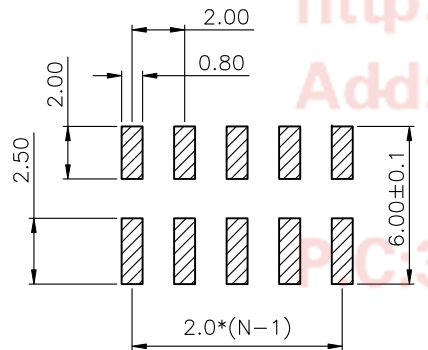

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

TYPE	A
1	4.00
2	5.50
3	
4	
5	

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION		TITLE	DUAL ROW RIGHT ANGLE S.M.T	
UNITS	mm			
SHEET SIZE	A4	SERIES	DS1025-07 SERIES	

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1025-07-XXXXXX-X-D		

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD