



REV.	SPECIFICATION	ECN NO.	APPD.

4673-xxTS

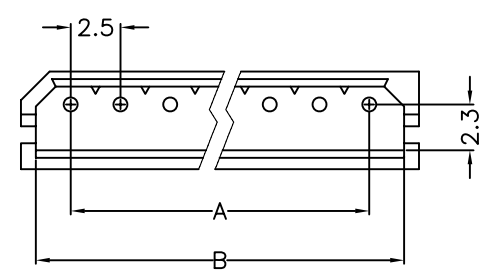

4673-xxTR

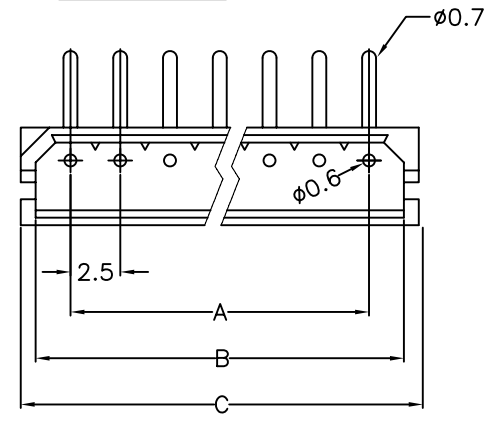

**Material:**

Housing: Thermoplastic Polyester UL94V-0(Nature).  
Contacts: Copper Alloy.

**Electrical Characteristics:**






Voltage Rating: 250V AC/DC.

Current Rating:

AWG	22	24	26	28
Amperes	3.0A	2.5A	2.0A	1.5A

Dielectric Withstanding Voltage: AC 1000V For 1 minute.  
Insulator Resistance: 1000M $\Omega$  min. at DC 500V.  
Contact Resistance: 20m $\Omega$  max. at DC 100mA.  
Operating Temperature: -40°C ~+105°C .

**\*RoHS Compliant**

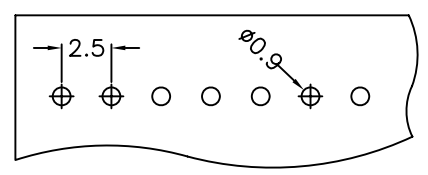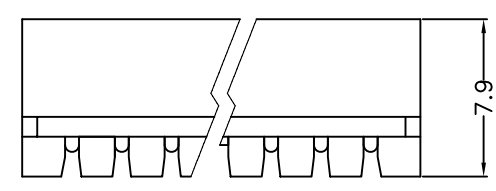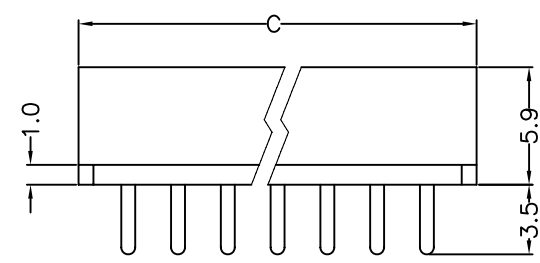

P.C. Board Layout

4673- xx T x B  
 Series No. of Pin T: Tin Plated S: Straight B: Bulk Package  
 R: Right Angle

Position	2 Thru 15
Dimension	
A	2.5*No. of Positions -2.5
B	2.5*No. of Positions +1.0
C	2.5*No. of Positions +2.5

Tolerances	Dwg. No.	4673D01001	Title:	
x = $\pm 0.5$	Projection	$\oplus$ $\triangleleft$	4673 Series	
.x = $\pm 0.25$	Unit	mm	Scale	1:1
.xx = $\pm 0.15$	Drawn By	CQ 11/19'13	2.5mm Wafer	

①760

**OUPIN**  
**OUPIN ELECTRONIC(KUNSHAN) CO., LTD.**  
 P/N: 4673-xxTxB

SHEET	1/1	Ver.No.	B1
-------	-----	---------	----