



RoHS

■ SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ HOUSING

- Housing Material: Nylon66 UL94V-2 Black
- Mates With: H4202 and W4202 dual row connectors
- Use With: T4202 terminals
- The Dimension Marked "▼" Must Be Recorded

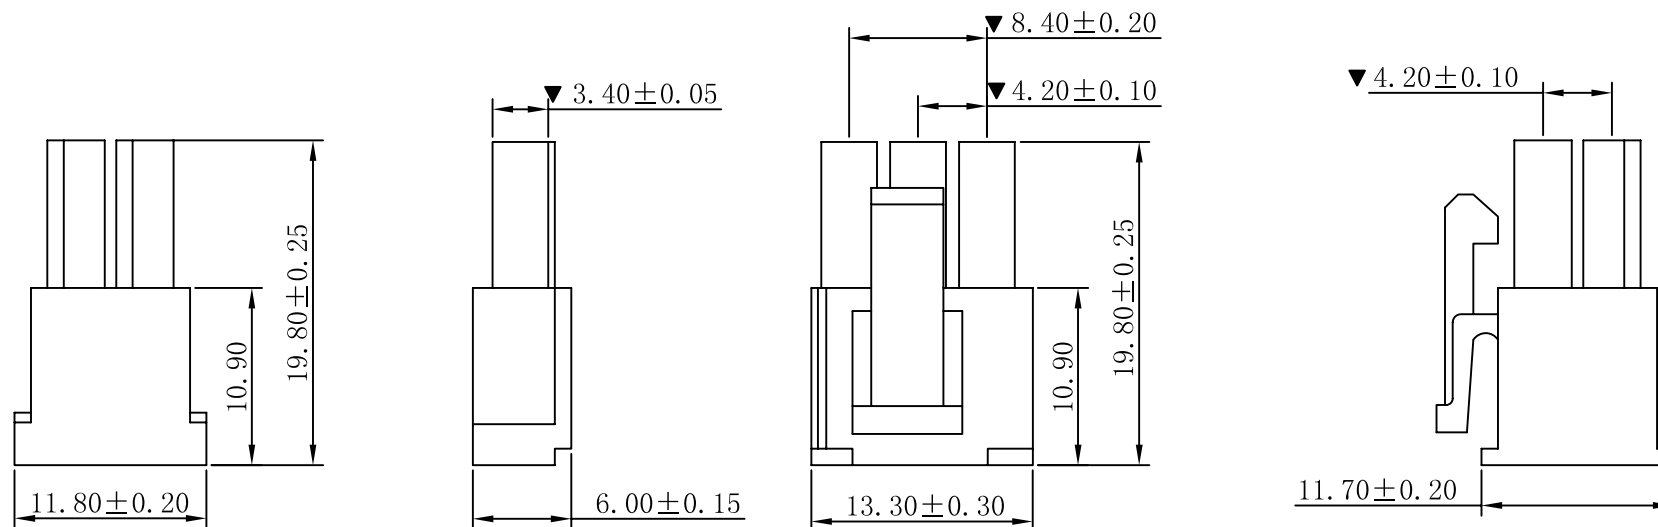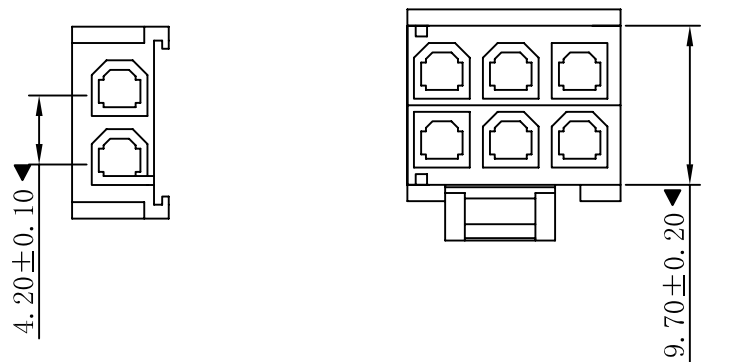

					一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE. ±1°
C	修订版本	2015-11-04	陈雄军	绘图/DR	陈雄军	
B	变更图宽格式内容	2013-12-27	陈雄军	审核/CHECK	胡进	
A	新版本	2011-05-24	陈雄军	核准/APPRO	MR. feng	
版次 REV.	说明 DESCRIPTION	日期 DATE.	承认 APPRO.	日期/DATE	2015-11-04	

KLS ELECTRONIC CO., LTD

投影法 Projection		品名 (PART NEME)	MX4.20mm Male Housing Connector Series
单位/Unit	MM	料号 (PART NO)	L-KLS1-4.20-26H00
比例/Scale	1:1		
大小/SIZE	A4		
页码/SHEET	1/1		
版本/Rev	C		