

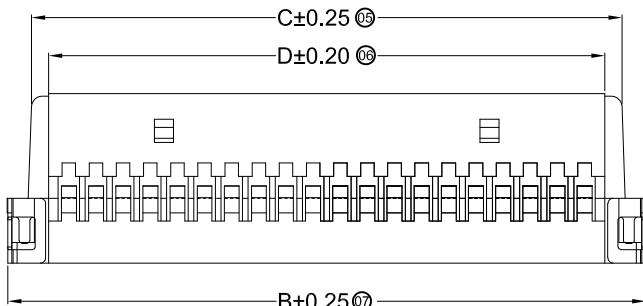
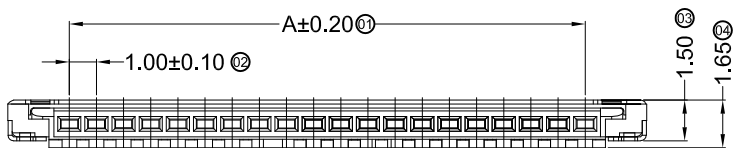
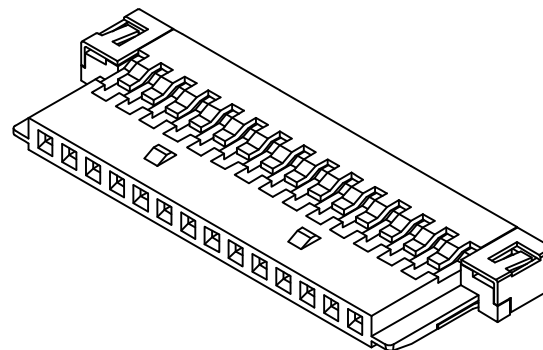


■ Specifications :

- Voltage rating: 100V AC / DC
- Current rating: 1A AC / DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥500MΩ
- Contact resistance: ≤30mΩ
- After environmental testing: ≤40mΩ

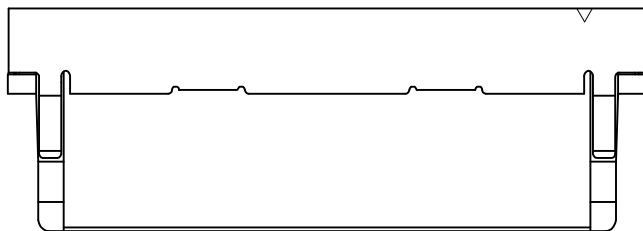

Poles	Dimensions(mm)			
	A	B	C	D
08	7.00	11.60	10.00	8.55
20	19.00	23.60	22.00	20.55
30	29.00	33.60	32.00	30.55

	Nylon 46 UL 94V-0	Stainless Steel		
PART NO	Material	Material(Shell)	Suitable SWB Terminal	Mates SWB Wafer

							GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10	KLS ELECTRONIC CO., LTD				PART NO L-KLS1-XL3-1.00-20-H			
												TITLE 1.00 mm Crimp Style Connectors			
								APPROVAL	CHECK	DRAWN	DATA				
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT 	Kim Huang	Jova Lau	sylvia	2016/03/17	UNIT MM	SCALE 1 : 1	NUMBER A-106	REV A