


SPECIFICATION

Current Rating: 5 AMP
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min.
 Dielectric Voltage: 1000V AC/minute
 Operation Temperature: -40°C to +115°C

MATERIAL



Insulator: PBT,Gray, UL 94V-0

5 H 2 5 2 5 N 0 - 1 X X G B L 0 0 M 0 1



AMTEK 耀德
 2019.11.13
 Released DCC

Part No	DIM.A	DIM.B
2	7.40	2.50
3	9.90	5.00
4	12.40	7.50
5	14.90	10.00
6	17.40	12.50
7	19.90	15.00
8	22.40	17.50
9	24.90	20.00
10	27.40	22.50
11	29.90	25.00
12	32.40	27.50
13	34.90	30.00
14	37.40	32.50
15	39.90	35.00
16	42.40	37.50
17	44.90	40.00
18	47.40	42.50
19	49.90	45.00
20	52.40	47.50

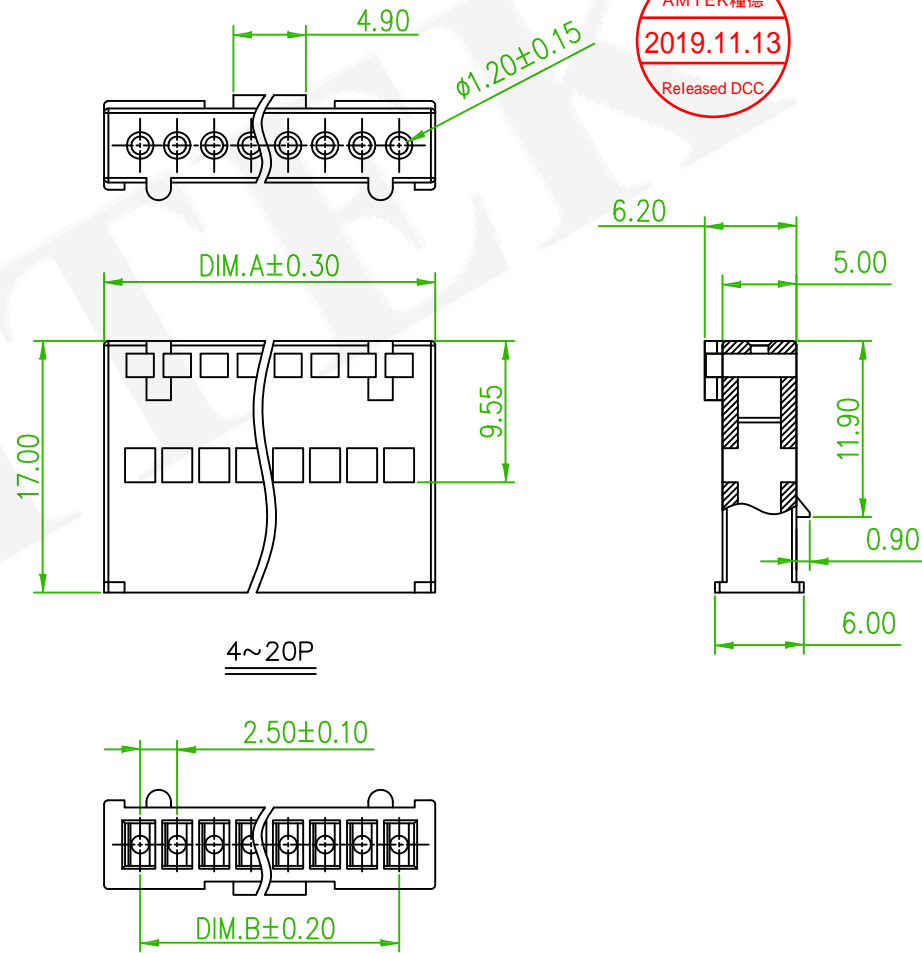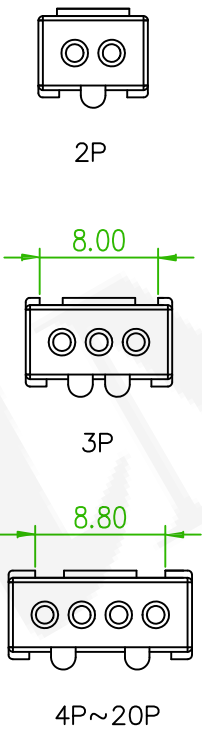

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.5mm Housing			頁數 Page	1/1
	品號 PART NO.	5H2525N0-1XXGBL00M01			繪圖 DRAWN	David 2019/11/13
	圖號 DRAWING NO.	GN003-DV483	版本 REV.	A	核對 CHECKED	Josh 2019/11/13
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/11/13
	公差 TOLERANCE	.X ±0.40 .XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	