


NO.	DATE	REV.	REMARK
△			
△			

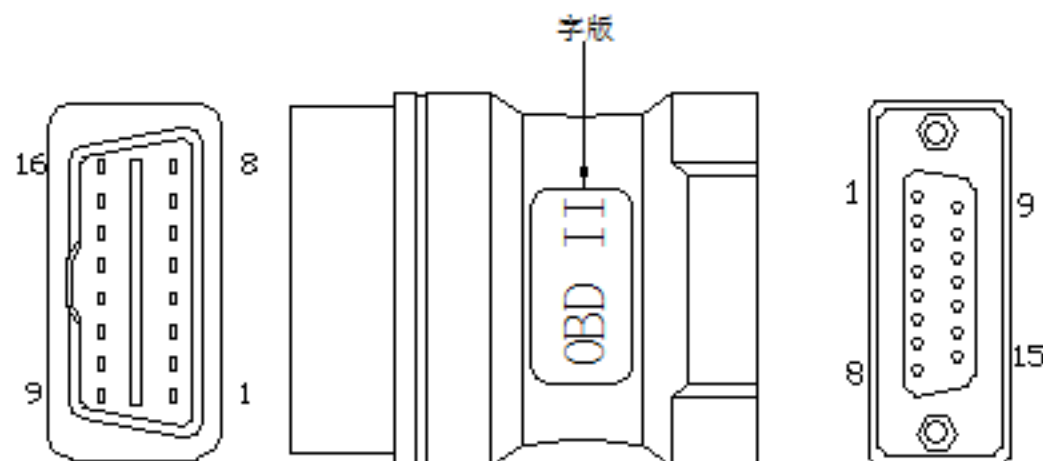

24#跳线 L=40MM

模具编号: J-013

外模: 红色

PIN ASSIGNMENT

P1 DB15P F	P2 OBDII M
1	1
2	2
3	3
4	4
16	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
5	15
15	16

测试要求:

- 100%测试OK: 不能有短路。错位。断线。绝缘不良
- 导通阻抗: 5 OHM
- 绝缘阻抗: 5M OHM
- 高压: 300V DC

BILL OF MATERIAL

NO.	SPECIFICATION	Q'TY
①		1PCS
②		MM
③	CABLE:24号跳线	30G
④	OVERMOLD:25P PVC 红色	1SET
⑤	DB15P FEMALE 前带螺母 蓝色胶芯	15G
⑥	OBDII黑色 (CC002) 尼龙料+不短路PCB板+3号尖针镀镍	1SET

QUALITY SYMBOLS	GENERAL TOLERANCES
	X _L ±---
	X _S ±---
	.XX ±1.27
	.XXX ±0.51
	ANGLE TOLERANCES
	X _L ±1.1°
	X _S ±---
	.XX' ±---
	.XXX' ---

KLS ELECTRONIC CO., LTD

CUSTOMER NUMBER
0900**300条**APPROVED BY: DATE
2016.11.30

TITLE: OBDII接头

PART NO. L-KLS1-OBD/DB-01-B

SIZE: A4 SCALE: 1:1 UNIT: mm

THIRD ANGLE PROJECTION