

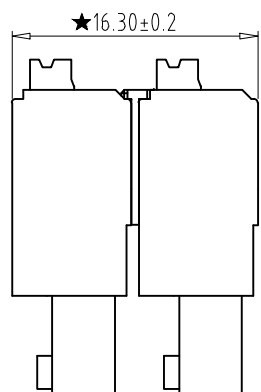
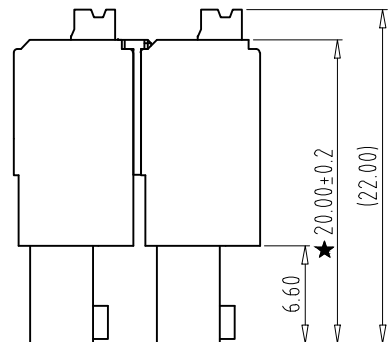


REV	CONTENT	CHK	DATE
V0.0	CONTENT	EXL	20.05.11

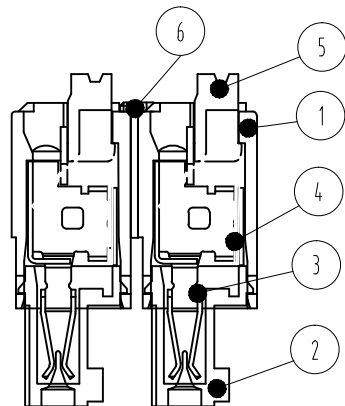


A = 3.50 × (N/2 - 1) ★
 L = 3.50 × (N/2 - 1) + 4.25 ★



Electrical :

- | | | |
|---|----------------|--------------------|
| | UL | IEC |
| 1. Rated Voltage : | 300V | 320V |
| 2. Rated Current : | 8A | 8A |
| 3. Wire Range : | 24-16AWG | 1.5mm ² |
| 4. Stripping Length : | 8-9mm | |
| 5. Withstanding Voltage : | AC1600V/1Min. | |
| 6. Operating Temperature : | -40°C ~ +105°C | |
| 7. RoHS Compliance | | |
| 8. Safty Approval : | | |
| 9. "★" is the key quality control point | | |



- ① Series NO. ④ 1 Single Pitch
 2 Double Pitch
- ② Pitch ⑤ Color: 1 Grey
 2 Blue
 3 Black
 4 Green
 5 Orange
 6 Red
 7 Transparent
 8 Yellow
 9 White
- ③ Poles
02 02Contacts
03 03Contacts
...
24 24Contacts
- ⑥ Customer Request: 00-Standard

6	CONNECTING PIECE	XX	1	PA66 UL94V-0	SEE NOTE
5	BUTTON	XX	P	PA66 UL94V-0	SEE NOTE
4	SHRAPNEL	XX	P	STAINLESS STEEL	/
3	CLAMP	XX	P	BRASS	Tin Plated
2	COVER	XX	2	PA66 UL94V-0	SEE NOTE
1	HOUSING	XX	2	PA66 UL94V-0	SEE NOTE
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CXL	DATE	20.05.11	SIZE	A4 UNITS mm SHEET/OF 1 / 1
CHK.	DATE		SCALE	1:1	
APP.	DATE		NAME	15EGTKNHC-3.5-XXP-XX-00	
宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD.				DWGNO.	XXXX

Total Pitch Tolerances in mm									Nominal dimension range in mm										⊥	=	-	//					
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	0	10	all	0	100	over
0	30	53	70	90	115	150	250	350	0	30	53	70	90	115	150	200	250	320	10	0	100	0	10		0	100	150
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	0	10		0	100	150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5				