

TERMINAL BLOCK Connector



PCB Series

KLS2-150-9.50 Series Pitch=9.50mm

Electrical :



- Rated voltage: 300V
- Rated current: 30A
- Contact resistance: 20mΩ
- Insulation resistance: 5000MΩ/1000V
- Withstanding Voltage: AC2000V/1Min
- Wire range: 26-10AWG 4mm²

Material


- Screws: M3 steel Zinc plated
- Contact: Brass, Ni plated
- Pin header: Brass, Tin plated
- Housing: PA66, UL94V-0

Mechanical


- Temp. Range: -40°C~+105°C
- MAX Soldering: +250°C for 5 Sec.
- Torque: 0.5Nm (4.5 lb.in)
- Strip length: 6-7mm

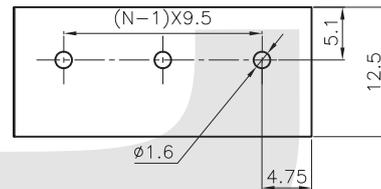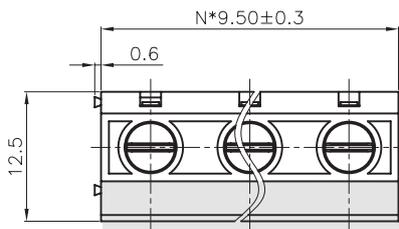

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

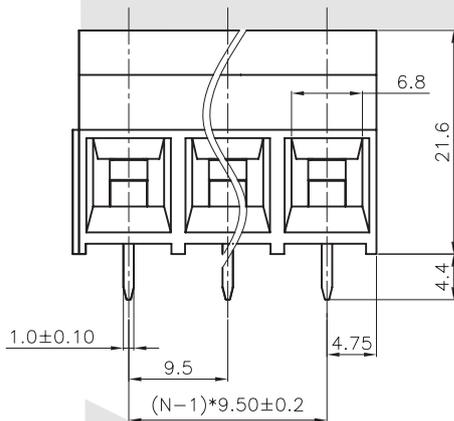

N表示端子的数量

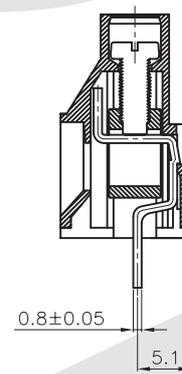

剖面 A-A

ORDER INFORMATION

Product NO.: KLS2-150-9.50-XXP X X X

- Pos. NO. _____
- Series No. _____
- Pitch: 9.50=9.50mm _____
- Number of Pole _____
- Customer Request _____
- Screw: C=Cross Screw
S=Slot Screw
- Color: 1=Gray 2=Blue 3=Black
4=Green 5=Orange 6=Red
7=Transparent 8=Yellow 9=White