
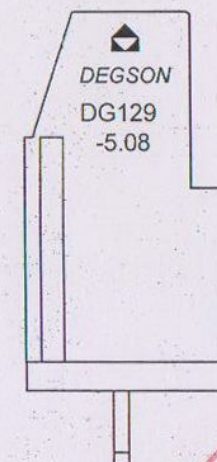
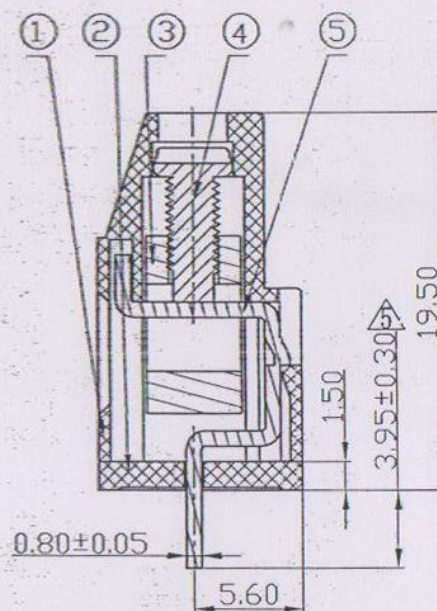


REVISION RECORD				
REV	ECD	DESCRIPTION	DRFT	DATE
3		Drawing Revise	Haoyh	03/30/06
4		增加VDE刻字	CSX	01/12/07
5		出脚由 3.85改为 3.95±0.30	CSX	02/03/07
6		鼠标志中去掉R	CSX	08/09/07
7	11-0280	增加COC刻字	ZMT	12/17/11

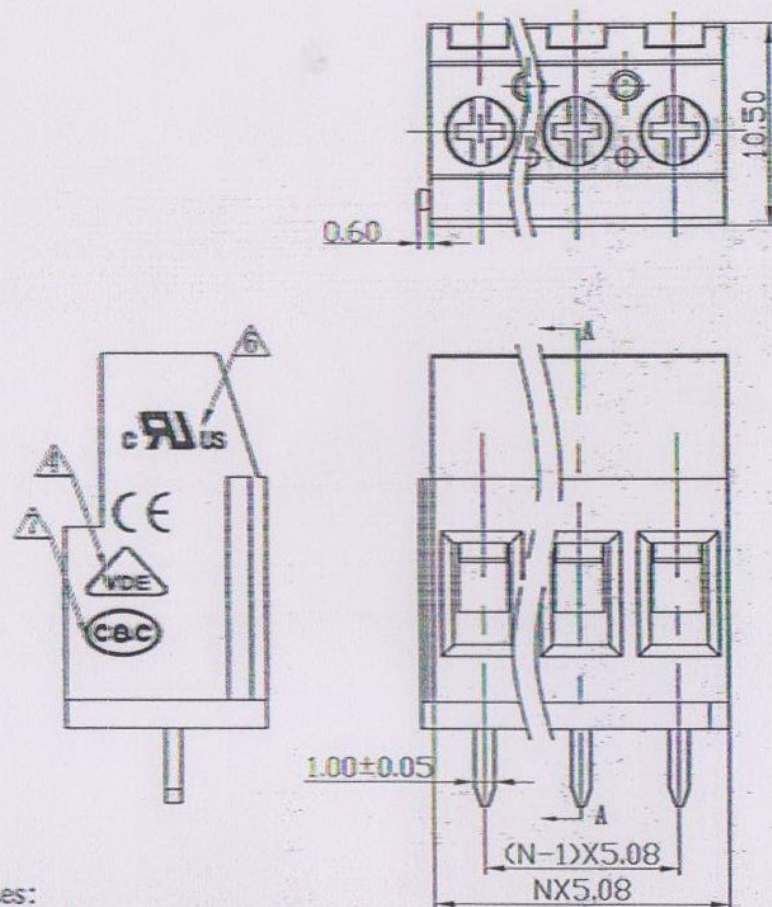

Notes:

1. Pitch: 5.08mm, Poles: 2-XXP
2. Rated voltage/current: UL 300V/20A
VDE 250V/20A
3. Operation temperatures: -40°C ~ +105°C
4. Withstanding Voltage: AC2000V/1min
5. Insulation Resistance: 5000MΩ/DC1000V
6. Wire Range: 26~12AWG, 0.5~2.5mm²
7. Max. Torque Value: M3, 5.1kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm				Nominal dimension range in mm				
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150		
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7		

SECTION A-A

5	DG129-Pin header	4029B00010 (H)	XX	Barss	SnCe
4	DG129-“+”Serews-M3	S000001730	XX	Steel	Cr ³⁺ Zn
3	DG129-Cage	X000000200 (H)	XX	Brass	Ni plated
2	DG129-5.08-Cover	4042C0YXXA (H)	1	PA66	UL94V-0
1	DG129-5.08-Housing	4042A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES

DETACHED LISTS	 FIRST ANGLE		DTG: LUM DATE 10/06/05*		 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
	TOLERANCES EXCEPT AS NOTED		CHKD DATE MFD DATE APPRVL DATE 12/11/11			
	H9/k9 .0 ± .00 ± .000 ±				NAME	
	ANGLES ± 1°		MATERIAL :		DG129-5.08-XXP-1Y-02A(H)	
	 THIRD ANGLE PROJECTION		GE : FINISH		DRAWING NO. DG129-5.08-E06 /PART NO.	
SCALE : 1:1		DO NOT SCALE DRAWING		SIZE REV A3 T7 12/17/11		
SHEET 1		OF 1				