
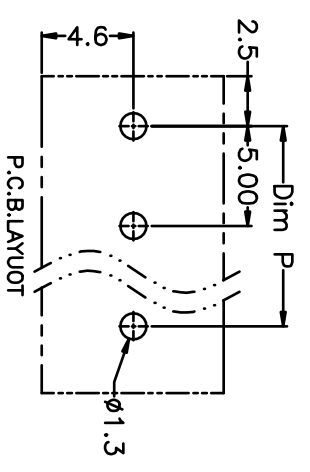
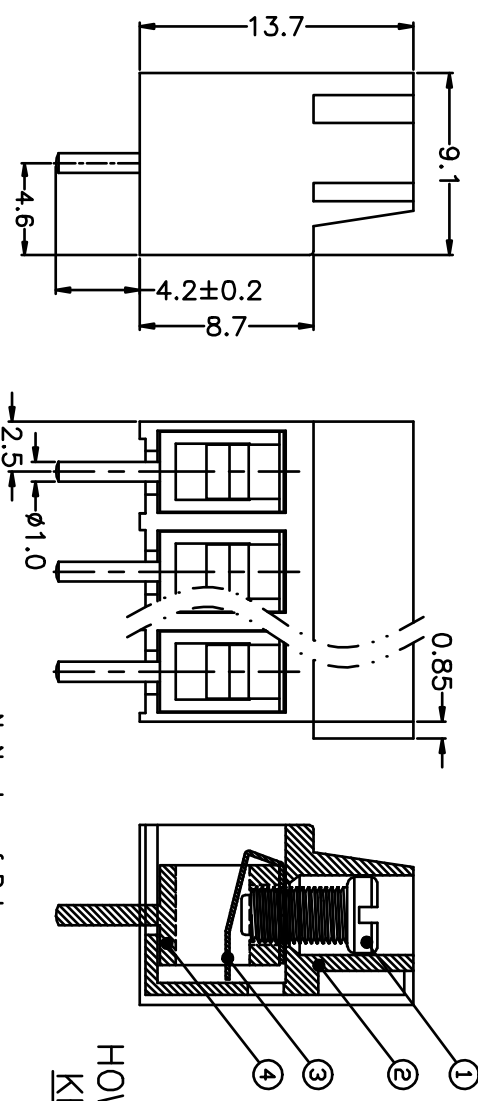


REV.	DESCRIPTION	DATE	DRAWN	APPROVED
A1	DWG.REL	2016/10/7	FANG	YANG




N=Number of Poles Dim P=(N-1)x5.00 Dim L=Nx5.00			
Poles	Dim P	Dim L	
2-6P	±0.10	±0.15	
7-12P	±0.20	±0.20	
13-18P	±0.25	±0.30	
19-24P	±0.30	±0.40	

GENERAL TOLERANCE		ANGLE TOLERANCE	
X	±0.5	X°	±5°
.X	±0.3	.X°	±3°
.XX	±0.1	.XX°	±1°
DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	XP0012016-xxxx		

- Material
 - ①Screws : M3.0 steel, Zinc plated, "—" slot type
 - ②Housing : PA66, UL94V-0
 - ③Reed : Phosphor bronze, Ni plated or stainless steel
 - ④Pin header : Brass, Tin plated
- Electrical
 - UL IEC
 - Rated voltage : 300V 250V
 - Rated current : 12A 25A
 - Insulation resistance: 500MΩ/DC500V
 - Withstanding Voltage : AC2000V/1min
 - Wire range: 22-14AWG 2.5mm²
- Mechanical
 - Operating temperature:-40℃~+105℃
 - Soldering temperature:250℃±5/5sec
 - Torque: 0.5N.m (4.43lb.in)
 - Strip length: 4.5-5mm

HOW TO ORDER
KF306 V -5.0-XXP-1 X-XXXXX

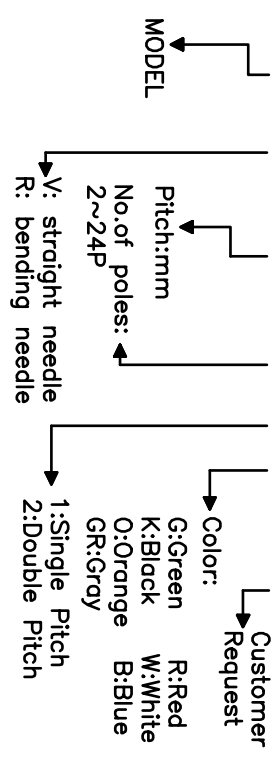

PROJECTION	TITLE
UNITS mm	KF306V-5.0-XXP
SHEET SIZE A4	SERIES KF306V
慈溪市凯峰电子有限公司	
CIXI KAIFENG ELECTRONIC CO.,LTD	