


REV	CONTENT	CHK	DATE
V0.0	CONTENT	YL	23.06.07

**Electrical :**

- |   |                |                     |
|---|----------------|---------------------|
|   | <b>UL</b>      | <b>IEC</b>          |
| 1. Rated Voltage :                      | 600V           | 1000V               |
| 2. Rated Current :                      | 90A            | 115A                |
| 3. Torque Value :                       | M5 ,17.54Lb.in | M5, 2.0N.m          |
| 4. Wire Range:                          | 20-2AWG        | 4-35mm <sup>2</sup> |
| 5. Operating Temperature :              | -30°C~+105°C   |                     |
| 6. RoHS Compliance                      |                |                     |
| 7. "★" is the key quality control point |                |                     |

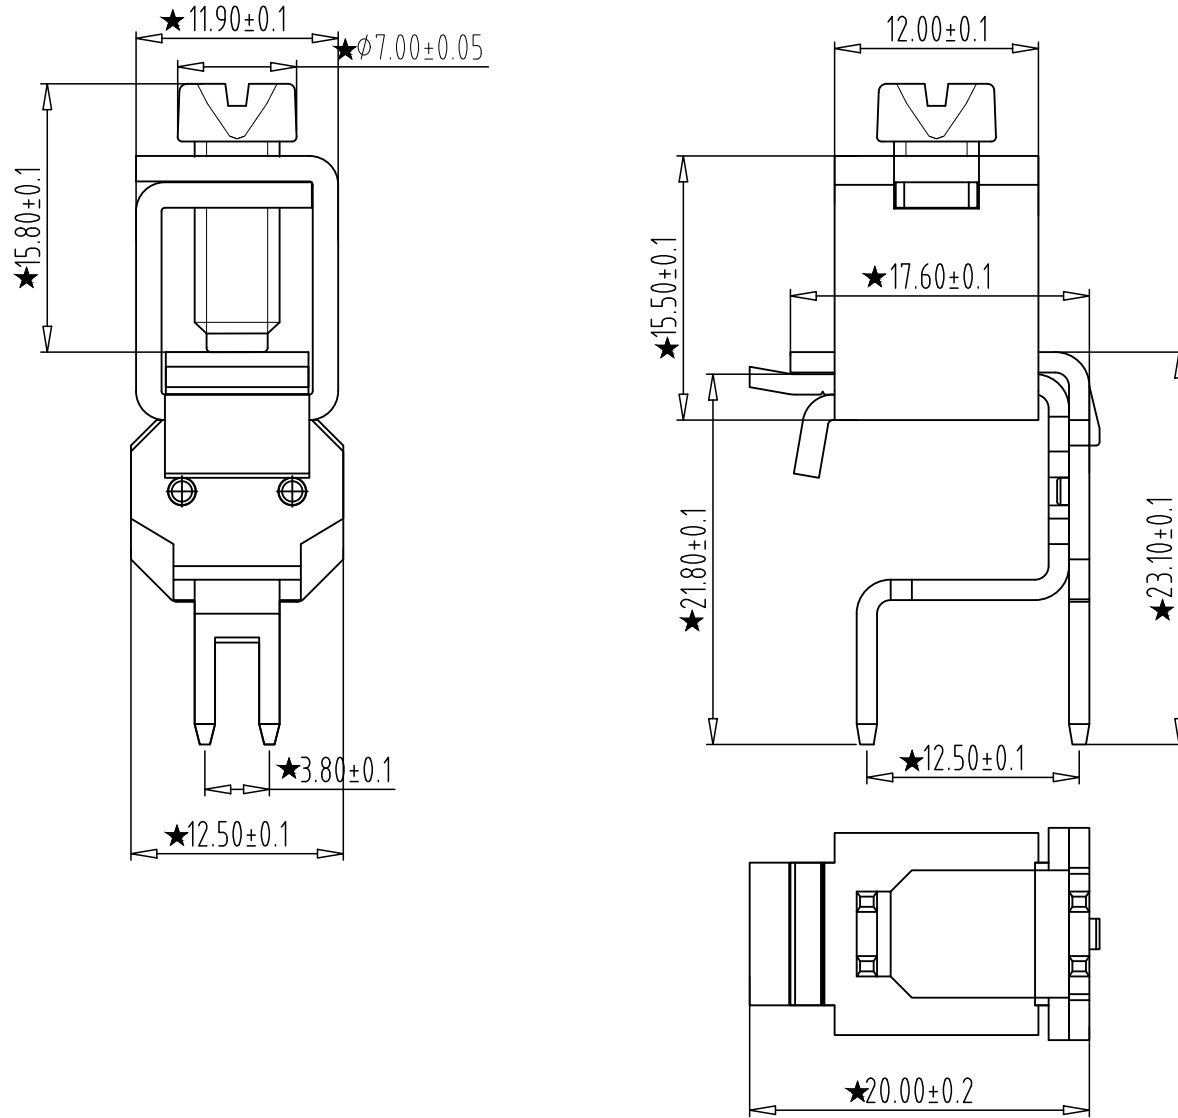

4	SCREW	XX	1	STEEL	Zn Plated
3	BLOCK	XX	1	STEEL	Zn Plated
2	Pin Header-02	XX	1	Copper Alloy	Tin Plated
1	Pin Header-01	XX	1	Copper Alloy	Tin Plated
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	YL	DATE	23.06.07	SIZE	A4 UNITS mm SHEET/OF 1 / 1
CHK.	DATE			SCALE	1:1
APP.	DATE			NAME	K11-00
<b>宁波冠泰电子有限公司</b> NINGBO GOLTEN ELECTRONICS CO., LTD.				DWGNO.	XXXX

Total Pitch Tolerances in mm										Nominal dimension range in mm										⊥	≡	—	//							
over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 250	over 350	over 500	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 0	over 10	over 100	over 150	10	all	100	150	0.2	0.3	0.5
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5	0.3	0.3	0.2	0.3	0.2	0.3	0.5