
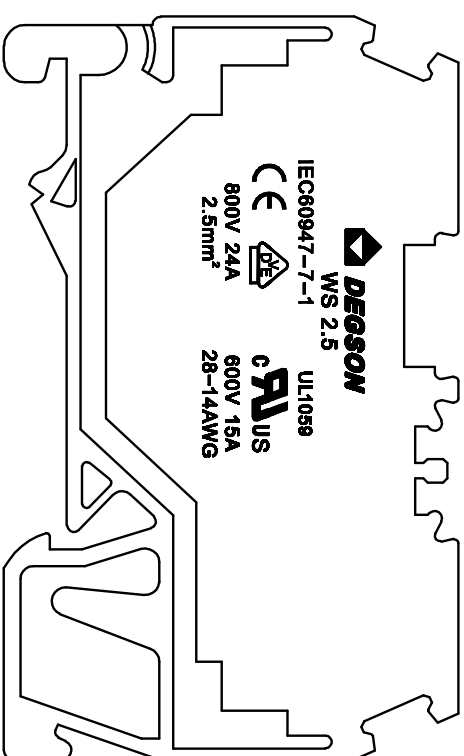
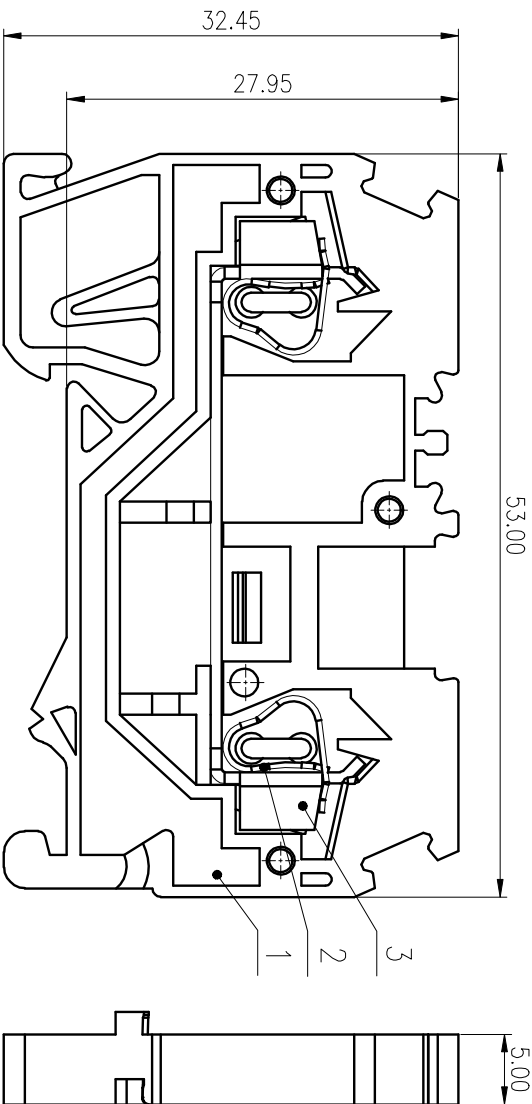


精度等级/General Tolerances(mm)												0.1/10															
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	EZ														
~	~	~	~	~	~	~	~	~	~	~	~	>500															
3	6	10	18	30	50	80	120	180	250	315	400	500															
±0.12		±0.18		±0.22		±0.26		±0.31		±0.37		±0.57		±0.80		±0.93		±1.05		±1.15		±1.60		±2.20		±2.50	



ITEM	NAME OF PART	MATERIAL	NOTES
3	Current carrier	Copper	Sn Plated
2	Spring	Stainless steel	
1	Housing	PA66	UL94V-0

REV	ECN	DESCRIPTION	DRAFT	DATE
1				
2				
3				

MATERIAL:		SURFACE:	
MAT NO.:	/		
STATUS:	/		
APPD:	LiGL 2020.05.27	NAME:	WS2.5-01P-1Y-00A(H)
CHKD:	MaoJ 2020.05.27	DRAWING NO.:	WS2.5-C01
DRAFT:ZhengQG 2020.05.27		TYPE:	CUSTOMER DRAWING
SIZE: A4	mm / inch	SCALE: 2:1	SHEET 1/1

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	600/15	600/15	600/15
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等	III/3	/	/
绝缘/Pollution Degree	/	/	/
额定电压/电涌/Rated Voltage(V)/Current(A)	800/24	/	/
额定电涌电压(KV)/Rate Impulse Voltage(KV)	8.0	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.2~2.5/28~14		
厚度/Pitch(mm)	5.00		
剥线长度/Stripping length(mm)	8~9		
使用温度范围/Operating Temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number:			
PANTONE / RAL	/		

DEGSON
 NINGBO DEGSON ELECTRICAL CO., LTD
 宁波高松电子有限公司