



PA-24 Micro Connector Crimping Pliers


More than 170 different terminals applicable

- Specialty of 2.5mm pitch connector contacts of different connector manufacturers, works with JST XH, PH, EH & NH series, Molex Micro-Fit, KK series, etc. AWG #32-#18
- Perfectly crimps triangular insulation barrel (lugs) of DuPont (Servo) connector, Molex C-Grid III, etc. without damaging the insulations.
- 6 Crimping Dies ('m'-shaped crimp: 1.3, 1.6, 1.9 & 2.2mm in width & Round crimp: $\phi 1.4$ & $\phi 1.8$ mm) for open-barrel contacts
- Built-in screw cutter (M2, M2.6 & M3)
- Tapered and slender jaws, Light weight of 115g only
- Spring loaded (on the back side), with locking latch for easy handling


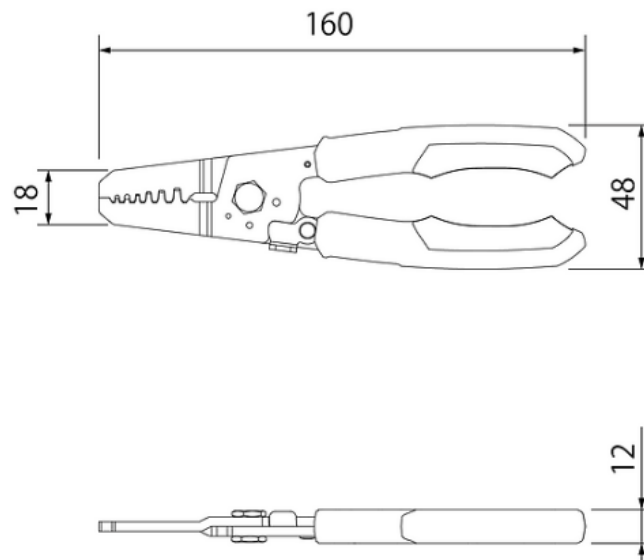


Item no.	Dies W(mm)	Dies H(mm)	Dies T(mm)	Wire (AWG) Ref. only
PA-24	1.3	0.5	2.2	#32 to 24
	1.6	0.7		#26 to 24
	1.9	0.8		#26 to 22
	2.2	0.9		#24 to 18
	1.4 diameter		3.2	#30 to 28
	1.8 diameter			#28 to 24

M-shaped Dies [1.3, 1.6, 1.9 & 2.2mm in width]
 The conductor barrel can be crimped securely.
 The insulation barrel can be curled up very tidily.

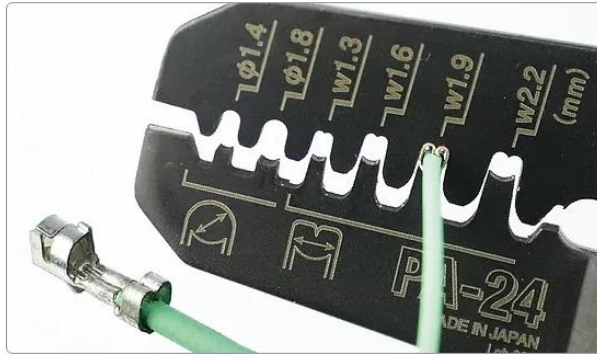

Round Dies (For DuPont contact etc.) [$\phi 1.4$ & $\phi 1.8$ mm]
 Wrap triangular lugs of the barrel around the insulation
 without damage.

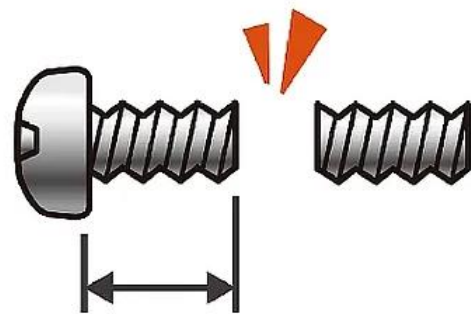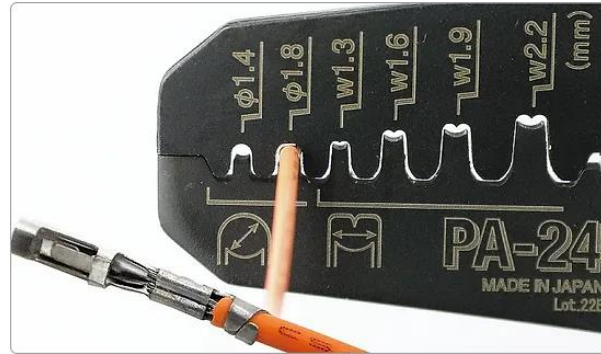

Min. Thread Length: 3.5mm