


Thyristor

V_{RRM} = 1200V
 I_{TAV} = 45A
 V_T = 1.37V


Single Thyristor

Part number

CS45-12io1

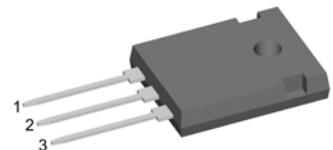

Backside: anode



Features / Advantages:

- Thyristor for line frequency
- Planar passivated chip
- Long-term stability

Applications:

- Line rectifying 50/60 Hz
- Softstart AC motor control
- DC Motor control
- Power converter
- AC power control
- Lighting and temperature control


Package: TO-247

- Industry standard outline
- RoHS compliant
- Epoxy meets UL 94V-0

Thyristor			Ratings			
Symbol	Definition	Conditions	min.	typ.	max.	Unit
$V_{RSM/DSM}$	max. non-repetitive reverse/forward blocking voltage	$T_{VJ} = 25^\circ C$			1300	V
$V_{RRM/DRM}$	max. repetitive reverse/forward blocking voltage	$T_{VJ} = 25^\circ C$			1200	V
I_{RD}	reverse current, drain current	$V_{RD} = 1200 \text{ V}$ $V_{RD} = 1200 \text{ V}$	$T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$		50 3	μA mA
V_T	forward voltage drop	$I_T = 45 \text{ A}$ $I_T = 90 \text{ A}$ $I_T = 45 \text{ A}$ $I_T = 90 \text{ A}$	$T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$		1.36 1.73 1.37 1.85	V V V V
I_{TAV}	average forward current	$T_C = 110^\circ C$	$T_{VJ} = 150^\circ C$		45	A
$I_{T(RMS)}$	RMS forward current	180° sine			71	A
V_{TO} r_T	threshold voltage slope resistance } for power loss calculation only		$T_{VJ} = 150^\circ C$		0.88 11	V $m\Omega$
R_{thJC}	thermal resistance junction to case				0.4	K/W
R_{thCH}	thermal resistance case to heatsink			0.25		K/W
P_{tot}	total power dissipation		$T_C = 25^\circ C$		310	W
I_{TSM}	max. forward surge current	$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$ $t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$T_{VJ} = 45^\circ C$ $V_R = 0 \text{ V}$ $T_{VJ} = 150^\circ C$ $V_R = 0 \text{ V}$		520 560 440 475	A A A A
I^2t	value for fusing	$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$ $t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$T_{VJ} = 45^\circ C$ $V_R = 0 \text{ V}$ $T_{VJ} = 150^\circ C$ $V_R = 0 \text{ V}$		1.35 1.31 970 940	kA²s kA²s A²s A²s
C_J	junction capacitance	$V_R = 400 \text{ V}$ $f = 1 \text{ MHz}$	$T_{VJ} = 25^\circ C$	22		pF
P_{GM}	max. gate power dissipation	$t_p = 30 \mu s$ $t_p = 300 \mu s$	$T_C = 150^\circ C$		10 5 0.5	W W W
P_{GAV}	average gate power dissipation					
$(di/dt)_{cr}$	critical rate of rise of current	$T_{VJ} = 125^\circ C; f = 50 \text{ Hz}$ repetitive, $I_T = 135 \text{ A}$ $t_p = 200 \mu s; di_G/dt = 0.3 \text{ A}/\mu s;$ $I_G = 0.3 \text{ A}; V_D = \frac{2}{3} V_{DRM}$ non-repet., $I_T = 45 \text{ A}$			150	A/ μs
$(dv/dt)_{cr}$	critical rate of rise of voltage	$V_D = \frac{2}{3} V_{DRM}$ $R_{GK} = \infty$; method 1 (linear voltage rise)	$T_{VJ} = 125^\circ C$		1000	V/ μs
V_{GT}	gate trigger voltage	$V_D = 6 \text{ V}$	$T_{VJ} = 25^\circ C$ $T_{VJ} = -40^\circ C$		1.5 1.6	V V
I_{GT}	gate trigger current	$V_D = 6 \text{ V}$	$T_{VJ} = 25^\circ C$ $T_{VJ} = -40^\circ C$		80 200	mA mA
V_{GD}	gate non-trigger voltage	$V_D = \frac{2}{3} V_{DRM}$	$T_{VJ} = 125^\circ C$		0.2	V
I_{GD}	gate non-trigger current				10	mA
I_L	latching current	$t_p = 10 \mu s$ $I_G = 0.3 \text{ A}; di_G/dt = 0.3 \text{ A}/\mu s$	$T_{VJ} = 25^\circ C$		150	mA
I_H	holding current	$V_D = 6 \text{ V}$ $R_{GK} = \infty$	$T_{VJ} = 25^\circ C$		100	mA
t_{gd}	gate controlled delay time	$V_D = \frac{1}{2} V_{DRM}$ $I_G = 0.3 \text{ A}; di_G/dt = 0.3 \text{ A}/\mu s$	$T_{VJ} = 25^\circ C$		2	μs
t_q	turn-off time	$V_R = 100 \text{ V}; I_T = 45 \text{ A}; V_D = \frac{2}{3} V_{DRM}$ $T_{VJ} = 150^\circ C$ $di/dt = 15 \text{ A}/\mu s; dv/dt = 20 \text{ V}/\mu s; t_p = 200 \mu s$		150		μs

Package TO-247			Ratings			
Symbol	Definition	Conditions	min.	typ.	max.	Unit
I_{RMS}	RMS current	per terminal			70	A
T_{stg}	storage temperature		-55		150	°C
T_{VJ}	virtual junction temperature		-40		150	°C
Weight				6		g
M_D	mounting torque		0.8		1.2	Nm
F_c	mounting force with clip		20		120	N

Product Marking

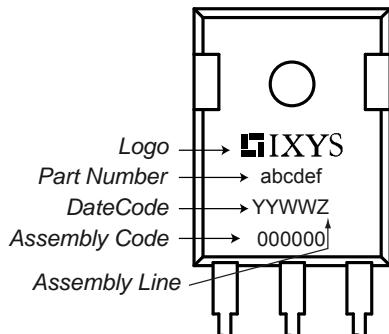


Ordering	Part Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	CS45-12io1	CS45-12io1	Tube	30	467685


Similar Part	Package	Voltage class
CS45-08io1	TO-247AD (3)	800
CS45-16io1	TO-247AD (3)	1600
CS45-16io1R	ISOPLUS247 (3)	1600
CLA50E1200HB	TO-247AD (3)	1200

Equivalent Circuits for Simulation


* on die level

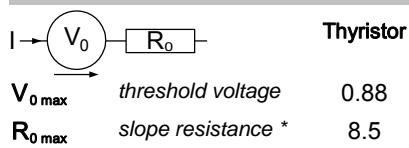 $T_{VJ} = 150^\circ\text{C}$ 

Outlines TO-247

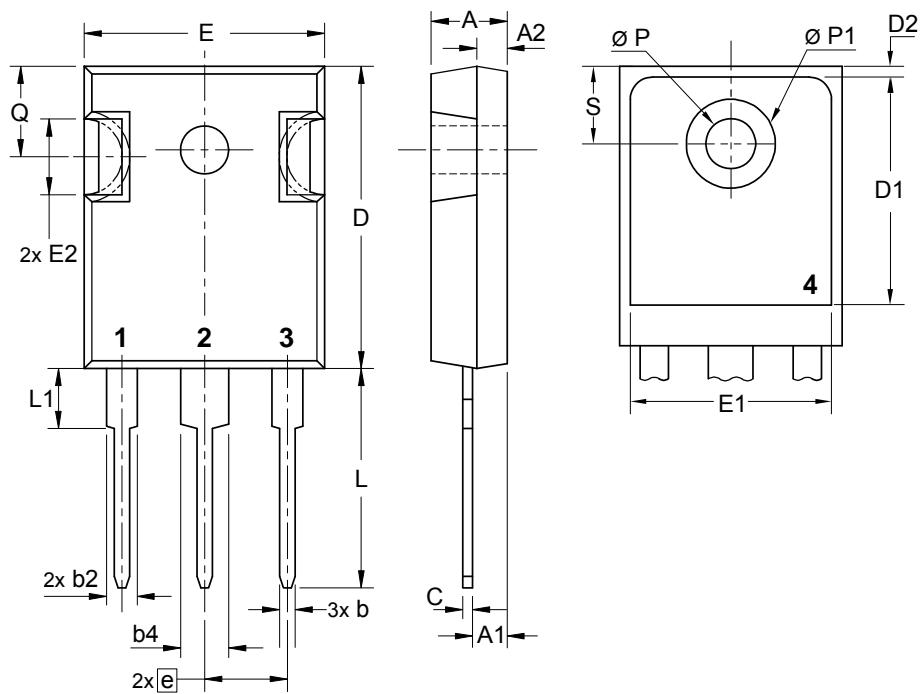

Sym.	Inches min. max.	Millimeter min. max.
A	0.185 0.209	4.70 5.30
A1	0.087 0.102	2.21 2.59
A2	0.059 0.098	1.50 2.49
D	0.819 0.845	20.79 21.45
E	0.610 0.640	15.48 16.24
E2	0.170 0.216	4.31 5.48
e	0.215 BSC	5.46 BSC
L	0.780 0.800	19.80 20.30
L1	- 0.177	- 4.49
Ø P	0.140 0.144	3.55 3.65
Q	0.212 0.244	5.38 6.19
S	0.242 BSC	6.14 BSC
b	0.039 0.055	0.99 1.40
b2	0.065 0.094	1.65 2.39
b4	0.102 0.135	2.59 3.43
c	0.015 0.035	0.38 0.89
D1	0.515 -	13.07 -
D2	0.020 0.053	0.51 1.35
E1	0.530 -	13.45 -
Ø P1	- 0.29	- 7.39

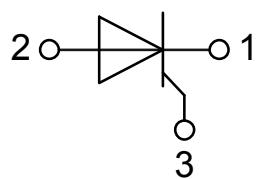

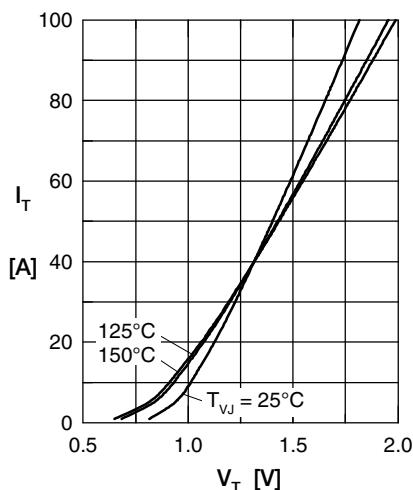
Thyristor

Fig. 1 Forward characteristics

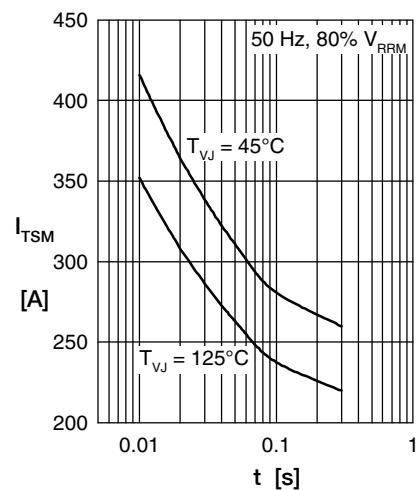


Fig. 2 Surge overload current

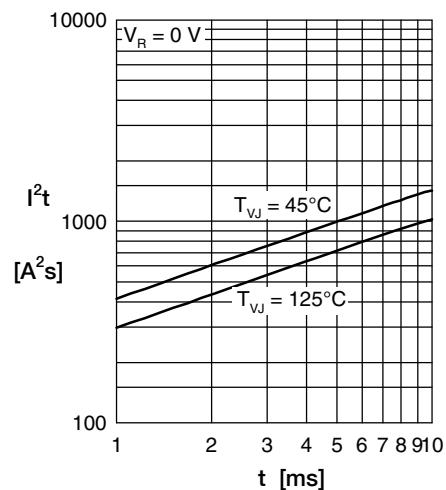
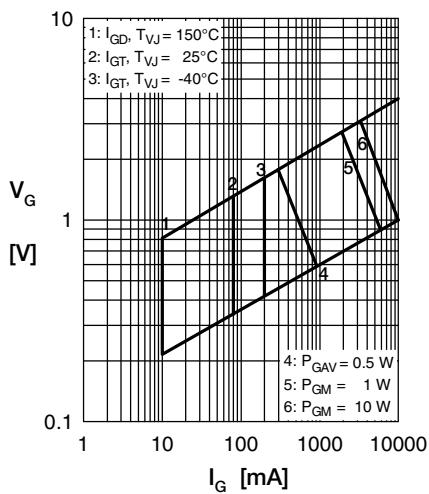
Fig. 3 I^2t versus time (1-10 ms)

Fig. 4 Gate trigger characteristics

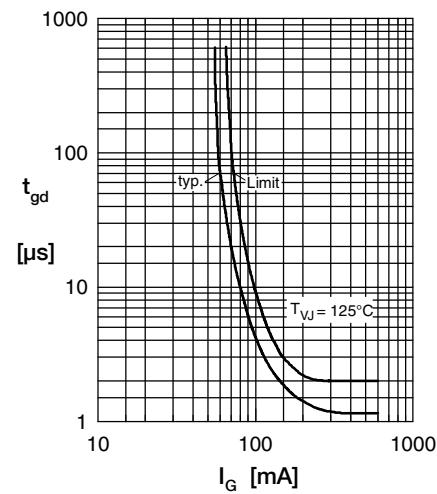


Fig. 5 Gate controlled delay time

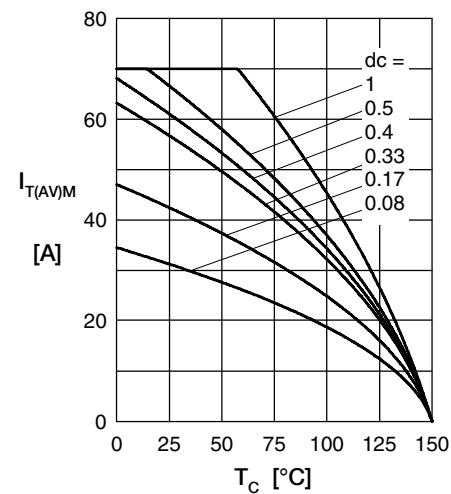


Fig. 6 Max. forward current at case temperature

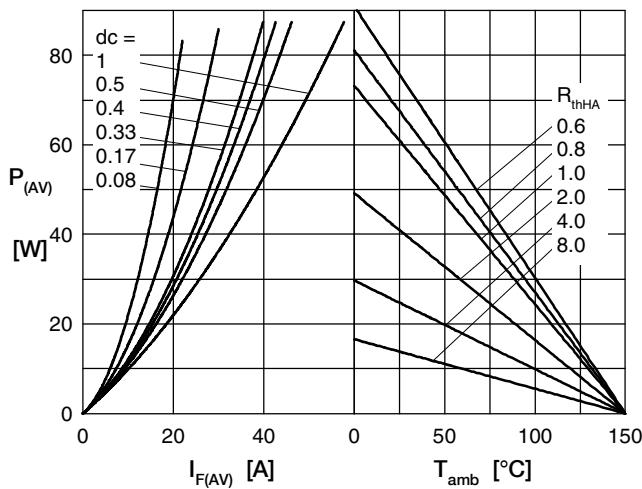
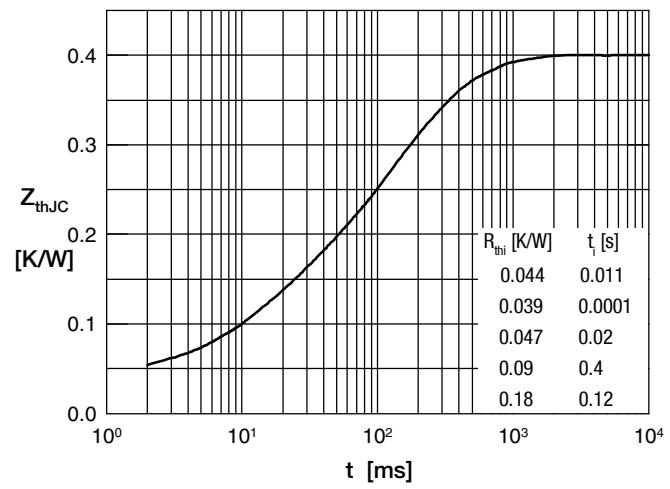
Fig. 7a Power dissipation versus direct output current
Fig. 7b and ambient temperature

Fig. 8 Transient thermal impedance