

Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc, As per IEC standards.

Effective Parameters irrespective of material grade (per piece)

- Effective Length (L_e): 44.4 mm
- Effective Area (A_e): 31.9mm²
- Effective Area (A_{Min}): 31.9mm²
- Effective Volume (V_e): 1419mm³

Approximate weight : 7.2g/pc




T1908 OL (Un- Coated)

Test Conditions: 10kHz/150mV/CFR COIL,N=01/Lo=Zero/25°C

Material Grade	Initial Permeability (μ_{iac})	AL Value (nH)	Ordering code
CF196	2000 $\pm$ 20%	1800+30%/-20%	CF196T1908
CF139	2100 $\pm$ 20%	1900+30%/-20%	CF139T1908
CF130	3000 $\pm$ 20%	2700+30%/-20%	CF130T1908
CF195A	5000 $\pm$ 20%	4500+30%/-20%	CF195AT1908
CF265	5000 $\pm$ 20%	4500+30%/-20%	CF265T1908
CF190	6000 $\pm$ 20%	5400+30%/-20%	CF190T1908
CF197	7000 $\pm$ 20%	6320+30%/-20%	CF197T1908
CF199	9000 $\pm$ 20%	8100 $\pm$ 30%	CF199T1908

Dimensions(Un-coated Core)

Dimension	Nominal (in mm)	Maximum (in mm)	Minimum (in mm)
A	19.0	19.4	18.6
B	10.8	11.1	10.5
C	8.0	8.25	7.75

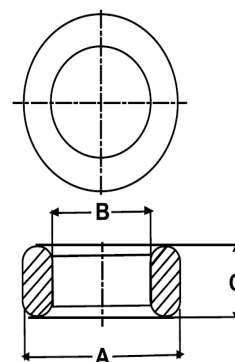

For general terms and conditions please visit: http://www.cosmoferrites.com/Downloads/Downloads/bcb70e7c-ae33-40ec-a881-0d5120db57b6_GTC.pdf

Regd. Office & Works: Jabli, Distt. Solan, Himachal Pradesh – 173 209 (India)

Tel: +91 1792 277231/32/36, Fax: +91 1792 277234

E-mail: sales@cosmoferrites.com