

**Appearance & Shape:** To be free from any defect such as flow, burrs, unevenness etc, As per IEC standards.

**Effective Parameters irrespective of material grade (per piece)**

- Effective Length ( $L_e$ ): 62.6 mm
  - Effective Area ( $A_e$ ): 79.4mm<sup>2</sup>
  - Effective Area ( $A_{Min}$ ): 79.4mm<sup>2</sup>
  - Effective Volume ( $V_e$ ): 4970mm<sup>3</sup>
- Approximate weight : 26.19g/pc**




## T2813A OL (Un- Coated)

**Test Conditions: 10kHz/150mV/CFR COIL,N=01/Lo=Zero/25°C**

Material Grade	Initial Permeability ( $\mu_{iac}$ )	AL Value (nH)	Ordering code
CF196	2000 $\pm$ 20%	3200+30%/-20%	CF196T2813A
CF139	2100 $\pm$ 20%	3350+30%/-20%	CF139T2813A
CF130	3000 $\pm$ 20%	4800+30%/-20%	CF130T2813A
CF195A	5000 $\pm$ 20%	8000+30%/-20%	CF195AT2813A
CF265	5000 $\pm$ 20%	8000+30%/-20%	CF265T2813A
CF190	6000 $\pm$ 20%	9500+30%/-20%	CF190T2813A
CF197	7000 $\pm$ 20%	11100+30%/-20%	CF197T2813A
CF199	9000 $\pm$ 20%	14300 $\pm$ 30%	CF199T2813A

## Dimensions(Un-coated Core)

Dimension	Nominal (in mm)	Maximum (in mm)	Minimum (in mm)
A	27.5	28.1	26.9
B	14.9	15.3	14.5
C	13.0	13.4	12.6

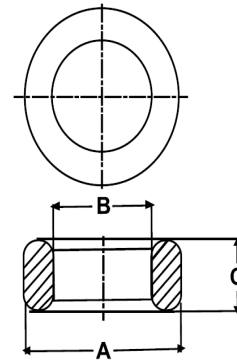

For general terms and conditions please visit: [http://www.cosmoferrites.com/Downloads/Downloads/bcb70e7c-ae33-40ec-a881-0d5120db57b6\\_GTC.pdf](http://www.cosmoferrites.com/Downloads/Downloads/bcb70e7c-ae33-40ec-a881-0d5120db57b6_GTC.pdf)