

Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc, As per IEC standards.

Effective Parameters irrespective of material grade (per piece)

- Effective Length (L_e): 152.08 mm
- Effective Area (A_e): 305.93mm²
- Effective Area (A_{Min}): 305.93mm²
- Effective Volume (V_e): 46528mm³

Approximate weight : 236g/pc




T6325OL (Un- Coated)

Test Conditions: 10kHz/150mV/CFR COIL,N=01/Lo=Zero/25°C

Material Grade	Initial Permeability (μ_{iac})	AL Value (nH)	Ordering code
CF196	2000 ±20%	5050+30%/-20%	CF196T6325
CF139	2100 ±20%	5300+30%/-20%	CF139T6325
CF130	3000 ±20%	7600+30%/-20%	CF130T6325
CF195A	5000 ±20%	12600+30%/-20%	CF195AT6325
CF265	5000 ±20%	12600+30%/-20%	CF265T6325
CF190	6000 ±20%	13900+30%/-20%	CF190T6325
CF197	7000 ±20%	16400+30%/-20%	CF197T6325
CF199	9000 ±20%	20200 ±30%	CF199T6325

Dimensions(Un-coated Core)

Dimension	Nominal (in mm)	Maximum (in mm)	Minimum (in mm)
A	63.0	64.3	61.7
B	38.0	38.8	37.2
C	25.0	25.5	24.5

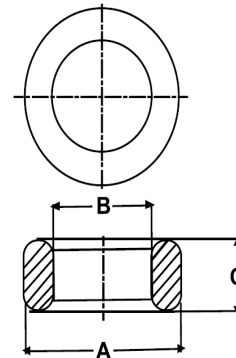

For general terms and conditions please visit: http://www.cosmoferrites.com/Downloads/Downloads/bcb70e7c-ae33-40ec-a881-0d5120db57b6_GTC.pdf

Regd. Office & Works: Jabli, Distt. Solan, Himachal Pradesh – 173 209 (India)

Tel: +91 1792 277231/32/36, Fax: +91 1792 277234

E-mail: sales@cosmoferrites.com