

Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc, As per IEC standards.

Effective Parameters irrespective of material grade (per piece)

- Effective Length (L_e): 91.5 mm
- Effective Area (A_e): 186.7mm²
- Effective Area (A_{Min}): 186.7mm²
- Effective Volume (V_e): 17083mm³

Approximate weight : 90g/pc




T4218 OL (Un- Coated)

Test Conditions: 10kHz/150mV/CFR COIL,N=01/Lo=Zero/25°C

Material Grade	Initial Permeability (μ_{iac})	AL Value (nH)	Ordering code
CF196	2000 $\pm$ 20%	5100+30%/-20%	CF196T4218
CF139	2100 $\pm$ 20%	5400+30%/-20%	CF139T4218
CF130	3000 $\pm$ 20%	7700+30%/-20%	CF130T4218
CF195A	5000 $\pm$ 20%	12800+30%/-20%	CF195AT4218
CF265	5000 $\pm$ 20%	12800+30%/-20%	CF265T4218
CF190	6000 $\pm$ 20%	15300+30%/-20%	CF190T4218
CF197	7000 $\pm$ 20%	17900+30%/-20%	CF197T4218

Dimensions(Un-coated Core)

Dimension	Nominal (in mm)	Maximum (in mm)	Minimum (in mm)
A	42.0	42.6	41.4
B	21.0	21.5	20.5
C	18.5	18.9	18.4

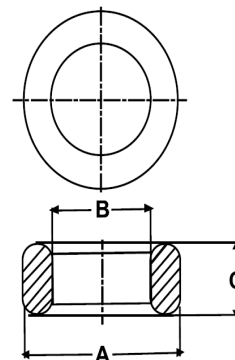

For general terms and conditions please visit: http://www.cosmoferrites.com/Downloads/Downloads/bcb70e7c-ae33-40ec-a881-0d5120db57b6_GTC.pdf

Regd. Office & Works: Jabli, Distt. Solan, Himachal Pradesh – 173 209 (India)

Tel: +91 1792 277231/32/36, Fax: +91 1792 277234

E-mail: sales@cosmoferrites.com