

Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc, As per IEC standards.

Effective Parameters irrespective of material grade (per piece)

- Effective Length (L_e): 76.0 mm
 - Effective Area (A_e): 82.6mm²
 - Effective Area (A_{Min}): 82.6mm²
 - Effective Volume (V_e): 6281mm³
- Approximate weight : 31.75g/pc**




T3113 OL (Un- Coated)

Test Conditions: 10kHz/150mV/CFR COIL,N=01/Lo=Zero/25°C

Material Grade	Initial Permeability (μ_{iac})	AL Value (nH)	Ordering code
CF196	2000 ±20%	2700+30%/-20%	CF196T3113
CF139	2100 ±20%	2900+30%/-20%	CF139T3113
CF130	3000 ±20%	4100+30%/-20%	CF130T3113
CF195A	5000 ±20%	6800+30%/-20%	CF195AT3113
CF265	5000 ±20%	6800+30%/-20%	CF265T3113
CF190	6000 ±20%	8200+30%/-20%	CF190T3113
CF197	7000 ±20%	9500+30%/-20%	CF197T3113
CF199	9000 ±20%	12200 ±30%	CF199T3113

Dimensions(Un-coated Core)

Dimension	Nominal (in mm)	Maximum (in mm)	Minimum (in mm)
A	31.0	31.8	30.5
B	19.0	19.6	18.4
C	13.0	13.5	12.5

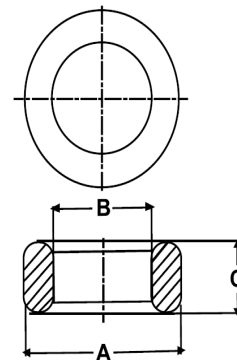

For general terms and conditions please visit: http://www.cosmoferrites.com/Downloads/Downloads/bcb70e7c-ae33-40ec-a881-0d5120db57b6_GTC.pdf