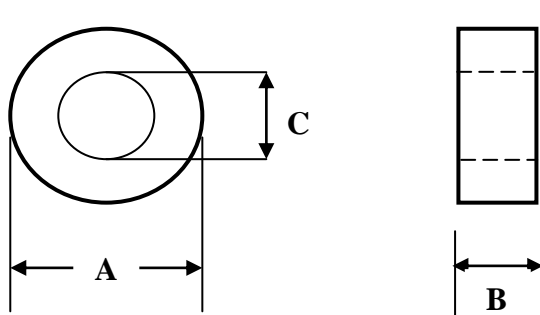


# SPECIFICATION FOR APPROVAL

CUSTOMER :				DATE :	
PART NO : T-17.5×6.35×9.5(B8)				DWG.NO : CT0156728K5A	
CUSTOMER PART NO :				CUST.DWG.NO :	
(1)DIMENSION(UNIT:mm)  				A	17.50 ± 0.4 m/m
				B	6.35 ± 0.3 m/m
				C	9.50 ± 0.3 m/m
				D	m/m
				E	m/m
				F	m/m
				G	m/m
				H	m/m
				I	m/m
				J	m/m
(2)ELECTRICAL REQUIREMENTS					
Z	MIN 25 OHM	TEST FREQ	25 MHz		
Z	MIN 40 OHM	TEST FREQ	100 MHz		
Z	MIN 135 OHM	TEST FREQ	300 MHz		
Z	MIN OHM	TEST FREQ	MHz		
TEST INSTRUMENTS					
HP4286A					
MATERIAL (ui)	800 ± 25%			APPROVED BY 吳載敏	
CORE	T-17.5×6.35×9.5				
WIRE	2UEW φ 0.65 × 100 mm			CHECKED BY 張明德	
WINDING	1 Ts			DRAWN BY LISA	

**CORE MASTER ENTERPRISE CO., LTD.**

TEL:886-2-8919-1288    FAX:886-2-8919-1298    WEB:www.coremaster.com.tw

# TEST DATA

CUSTOMER :					DATE :				
PART NO : T-17.5×6.35×9.5(B8)					DWG.NO : CT0156728K5A				
CUSTOMER PART NO :					CUST.DWG.NO :				
IMPEDANCE					DIMENSION (UNIT : mm)				
FREQ	25MHz	100MHz	300MHz		A	B	C		
SPEC	MIN 25 OHM	MIN 40 OHM	MIN 135 OHM		17.50 ± 0.4	6.35 ± 0.3	9.5 ± 0.3		
1	29	65	171		17.73	6.41	9.52		
2	29	66	173		17.75	6.42	9.51		
3	29	65	171		17.75	6.41	9.52		
4	29	65	171		17.74	6.42	9.51		
5	29	66	172		17.73	6.41	9.51		
6	29	66	172		17.75	6.42	9.51		
7	29	65	171		17.73	6.43	9.51		
8	29	65	170		17.75	6.44	9.52		
9	28	66	172		17.73	6.43	9.51		
10	29	66	173		17.74	6.44	9.50		
$\bar{X}$	29	66	172		17.74	6.42	9.51		
R	1	1	3		0.02	0.03	0.02		
外觀檢查: 產品不能有明顯缺陷、污損，產品缺口長、寬在 1.7mm 以下， 深度在 1.0mm 以下。					APPROVED BY				
					吳載敏				
					CHECKED BY				
					張明德				
					DRAWN BY				
					LISA				

**CORE MASTER ENTERPRISE CO., LTD.**

TEL:886-2-8919-1288    FAX:886-2-8919-1298    WEB:www.coremaster.com.tw

# T-17.5×6.35×9.5 (B8)

