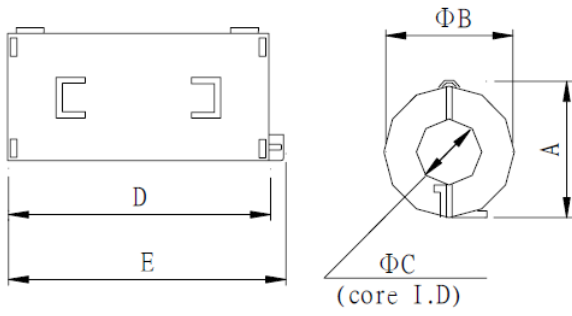


SPECIFICATION FOR APPROVAL

CUSTOMER:				DATE:	
PART NO: LF – 110B (B8)				DWG.NO: CT2110703K5A	
CUSTOMER PART NO:				CUST.DWG.NO:	
(1) DIMENSION(UNIT:mm) 				A	20.5 ± 1.0 m/m
				B	21.0 ± 1.0 m/m
				C	11.0 ± 0.4 m/m
				D	32.0 ± 1.0 m/m
				E	36.0 ± 1.0 m/m
				F	m/m
				G	m/m
				H	m/m
				I	m/m
				J	m/m
(2)ELECTRICAL REQUIREMENTS				(3)CASE COLOR	
Z	MIN 80 OHM	TEST FREQ	25 MHz	B:BLACK W:WHITE G:GRAY	
Z	MIN 130 OHM	TEST FREQ	100 MHz		
Z	MIN OHM	TEST FREQ	MHz		
Z	MIN OHM	TEST FREQ	MHz		
(4)TEST INSTRUMENTS					
HP E4286A					
MATERIAL (ui)	800 ± 25%			APPROVED BY 吳載敏 CHECKED BY 張明德 DRAWN BY Vivian	
CORE	UH-17.2 × 28 × 11				
WIRE	φ 0.65 × 100 mm				
WINDING	1 Ts				

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

TEST DATA

CUSTOMER :				DATE :					
PART NO: LF - 110B (B8)				DWG.NO: CT2110703K5A					
CUSTOMER PART NO :				CUST.DWG.NO :					
IMPEDANCE				DIMENSION (UNIT : mm)					
FREQ	25 MHz	100 MHz		A	B	C	D	E	
SPEC	MIN 80 OHM	MIN 130 OHM		20.5 ± 1.0	21.0 ± 1.0	11.0 ± 0.4	32.0 ± 1.0	36.0 ± 1.0	
1	82	145		20.54	21.04	11.02	32.15	36.15	
2	82	145		20.53	21.01	10.99	32.16	36.19	
3	83	146		20.50	21.02	10.97	32.19	36.20	
4	82	145		20.55	21.05	11.00	32.15	36.18	
5	82	146		20.51	21.01	11.01	32.20	36.22	
6	82	146		20.51	21.02	10.99	32.22	36.15	
7	83	145		20.53	21.05	11.00	32.18	36.15	
8	83	145		20.52	21.02	11.08	32.20	36.18	
9	83	146		20.52	21.03	11.05	32.19	36.18	
10	82	146		20.51	21.05	11.01	32.20	36.15	
X	82	146		20.52	21.03	11.01	32.18	36.18	
R	1	1		0.05	0.04	0.11	0.07	0.07	
REMARK: 產品不能有明顯缺陷、污損；產品缺口長、寬在 1.7mm 以下， 深在 1.2mm 以下。						APPROVED BY			
						吳載敏			
						CHECKED BY			
				張明德					
				DRAWN BY					
				Vivian					

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

LF -110B (B8)

