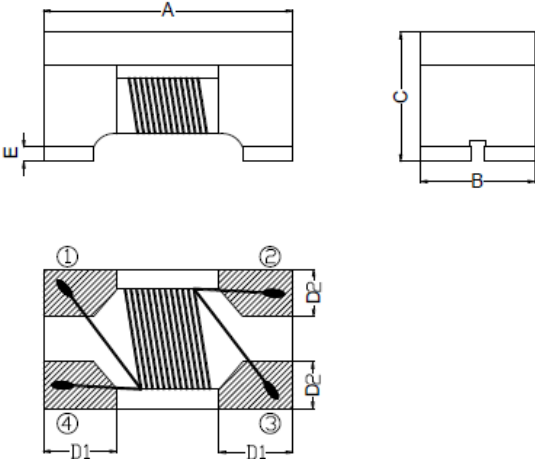


SPECIFICATION FOR APPROVAL

CUSTOMER:			DATE:		
PART NO: WCB3216-601Y-N			DWG.NO: SI2717808		
CUSTOMER PART NO:			CUST.DWG.NO:		
<p>(1) DIMENSIONS (UNIT: mm)</p> 			A	3.20 ± 0.20	m/m
			B	1.60 ± 0.20	m/m
			C	2.00 ± 0.20	m/m
			D1	0.50 (REF)	m/m
			D2	0.50 (REF)	m/m
			E	0.15 (REF)	m/m
			F		m/m
			G		m/m
			H		m/m
			I		m/m
(2) ELECTRICAL REQUIREMENTS					
Z (Ω)	600 ± 25%	TEST FREQ	100MHz		
RDC (Ω)	0.8 (MAX)	TEST FREQ			
IDC (mA)	300 (MAX)	TEST FREQ			
TEST INSTRUMENTS HP16092A HP4338B HP4291A			APPROVED BY 吳載敏		
			CHECKED BY 張明德		
			DRAWN BY Vicky		

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-9819-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

TEST DATA

CUSTOMER :				DATE :					
PART NO: WCB3216-601Y-N				DWG.NO: SI2717808					
CUSTOMER PART NO :				CUST.DWG.NO :					
ITEM	Z (Ω)	RDC (Ω)	IDC (mA)						
FREQ	100MHz								
SPEC	600 ± 25%	0.8 (MAX)	300 (MAX)						
1	726.70	0.521	OK						
2	690.22	0.519	OK						
3	671.52	0.520	OK						
4	665.01	0.521	OK						
5	673.84	0.520	OK						
6	689.65	0.524	OK						
7	649.92	0.527	OK						
8	705.56	0.525	OK						
9	703.32	0.524	OK						
10	681.37	0.512	OK						
X	685.71	0.521							
R	76.78	0.015							
						APPROVED BY 吳載敏			
						CHECKED BY 張明德			
						DRAWN BY Vicky			

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-9819-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

WCB3216-601Y-N

