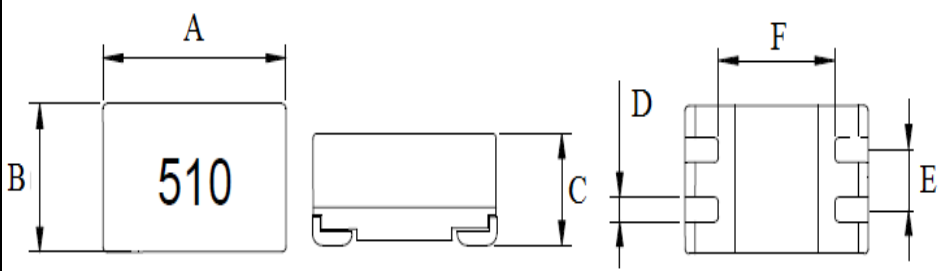
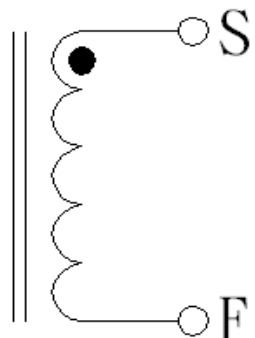


SPECIFICATION FOR APPROVAL

CUSTOMER:		DATE:			
PART NO: SFT0905-510N		DWG.NO: SL1170071			
CUSTOMER PART NO:		CUST.DWG.NO:			
(1) DIMENSION(UNIT: mm) 		A	9.20 ± 0.30 m/m		
		B	6.00 ± 0.30 m/m		
		C	5.00 ± 0.30 m/m		
		D	1.00 (REF) m/m		
		E	2.54 (REF) m/m		
		F	5.70 (REF) m/m		
		G	m/m		
		H	m/m		
		I	m/m		
		J	m/m		
		(2) ELECTRICAL REQUIREMENTS		(3) SCHEMATIC 	
Impedance (Ω) 20~150MHz	5500 (TYP)				
RDC (mΩ)	160 (MAX)				
IDC (A)	1.0 (MAX)				
TEST CONDITION	1KHz / 0.1V				
APPROVED BY <div style="text-align: right;">吳載敏</div>		CHECKED BY <div style="text-align: right;">張明德</div>			
		DRAWN BY <div style="text-align: right;">Vicky</div>			

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

TEST DATA

CUSTOMER:					DATE:				
PART NO: SFT0905-510N					DWG.NO: SL1170071				
CUSTOMER PART NO :					CUST.DWG.NO :				
TEST CONDITION: 1KHz / 0.1V					DIMENSION (UNIT : mm)				
ITEM	L (uH)	RDC (mΩ)	IDC (A)	A	B	C	D	E	F
SPEC	51 ± 30%	160 (MAX)	1.0 (MAX)	9.20 ± 0.30	6.00 ± 0.30	5.00 ± 0.30	1.00 (REF)	2.54 (REF)	5.70 (REF)
1	46.5	105	OK	9.33	6.05	4.95	1.02	2.42	5.68
2	50.0	104	OK	9.30	6.07	5.09	1.06	2.35	5.74
3	44.6	105	OK	9.31	6.06	5.06	1.05	2.48	5.66
4	44.5	106	OK	9.33	6.06	4.97	1.10	2.39	5.71
5	48.6	107	OK	9.32	6.05	5.12	1.09	2.42	5.69
6	46.5	105	OK	9.33	6.05	4.95	1.02	2.42	5.68
7	50.0	104	OK	9.30	6.07	5.09	1.06	2.35	5.74
8	44.6	105	OK	9.31	6.06	5.06	1.05	2.48	5.66
9	44.5	106	OK	9.33	6.06	4.97	1.10	2.39	5.71
10	48.6	107	OK	9.32	6.05	5.12	1.09	2.42	5.69
X	46.8	105		9.32	6.06	5.04	1.06	2.41	5.70
R	5.5	3		0.03	0.02	0.17	0.08	0.13	0.08
TEST INSTRUMENTS GKT-3250 GKT-502BC						APPROVED BY 吳載敏			
						CHECKED BY 張明德			
						DRAWN BY Vicky			

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw