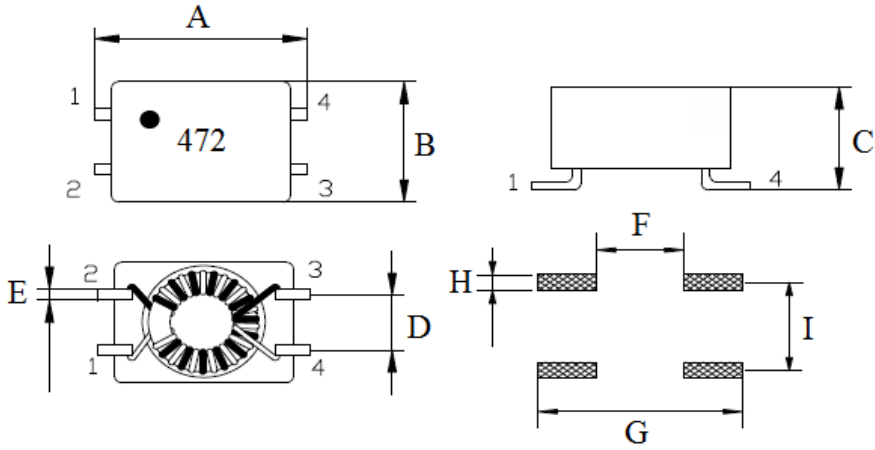
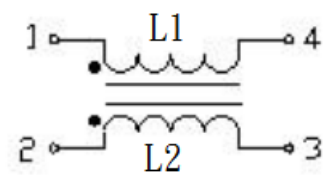


SPECIFICATION FOR APPROVAL

CUSTOMER:		DATE:		
PART NO: SHT0905-472		DWG.NO: SL2270072		
CUSTOMER PART NO:		CUST.DWG.NO:		
<p>(1) DIMENSION(UNIT: mm)</p> 		A	9.00 ± 0.50	m/m
		B	5.50 ± 0.40	m/m
		C	5.20 (MAX)	m/m
		D	2.54 (REF)	m/m
		E	0.50 (REF)	m/m
		F	4.50 (TYP)	m/m
		G	10.50 (REF)	m/m
		H	1.20 (REF)	m/m
		I	2.54 (REF)	m/m
		(2)ELECTRICAL REQUIREMENTS		(3)SCHEMATIC
L1=L2 (mH)	4.7 +50%/-30%			
RDC1=RDC2 (mΩ)	900 (MAX)			
IDC (A)	0.4 (MAX)			
TEST CONDITION	100KHz / 0.1V			
(4)MATERIAL LIST				
NO/ITEM	MATERIAL			
		APPROVED BY	吳載敏	
		CHECKED BY	張明德	
		DRAWN BY	Vicky	

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

TEST DATA

CUSTOMER:				DATE:				
PART NO: SHT0905-472				DWG.NO: SL2270072				
CUSTOMER PART NO :				CUST.DWG.NO :				
TEST CONDITION: 100KHz / 0.1V				DIMENSION (UNIT : mm)				
ITEM	L1=L2 (mH)	RDC1 =RDC2 (mΩ)	IDC (A)	A	B	C		
SPEC	4.7 +50%/-30%	900 (MAX)	0.4 (MAX)	9.00 ± 0.50	5.50 ± 0.40	5.20 (MAX)		
1	5.77	666	OK	9.05	5.46	4.52		
2	4.85	685	OK	8.99	5.41	5.46		
3	5.32	678	OK	9.05	5.45	5.59		
4	4.95	684	OK	9.01	5.44	4.55		
5	4.75	675	OK	8.98	5.42	4.56		
6	5.77	666	OK	9.05	5.46	4.52		
7	4.85	685	OK	8.99	5.41	5.46		
8	5.32	678	OK	9.05	5.45	5.59		
9	4.95	684	OK	9.01	5.44	4.55		
10	4.75	675	OK	8.98	5.42	4.56		
\bar{X}	5.13	678		9.02	5.44	4.94		
R	1.02	19		0.07	0.05	1.07		
TEST INSTRUMENTS GKT-3250 GKT-502BC CH2816 WR7210						APPROVED BY 吳載敏		
						CHECKED BY 張明德		
						DRAWN BY Vicky		

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw