



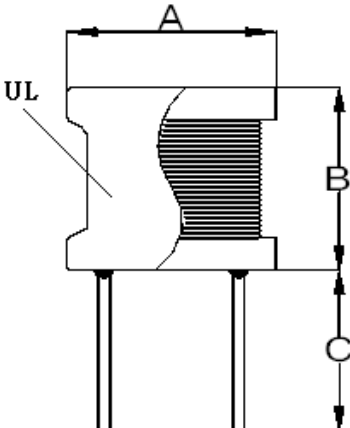


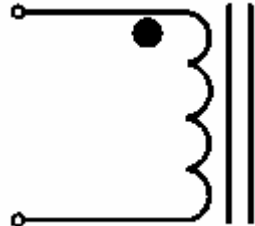


SPECIFICATION FOR APPROVAL

CUSTOMER:		DATE:	
PART NO: RC0810U-100K(2A)		DWG.NO: HX4008651	
CUSTOMER PART NO:		CUST.DWG.NO:	
(1) DIMENSION(UNIT: mm) 		A	10 (MAX) m/m
		B	12 (MAX) m/m
		C	15.0 ± 2.0 m/m
		D	m/m
		E	m/m
		F	m/m
		G	m/m
		H	m/m
		I	m/m
		J	m/m
		(2)ELECTRICAL REQUIREMENTS	
L (uH)	10 ± 10%		
RDC (Ω)	0.1 (MAX)		
IDC (A)	2 (MAX)		
TEST CONDITION	1KHz / 0.25V		
		APPROVED BY 	
		CHECKED BY 	
		DRAWN BY 	

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

TEST DATA

CUSTOMER:				DATE:				
PART NO: RC0810U-100K(2A)				DWG.NO: HX4008651				
CUSTOMER PART NO :				CUST.DWG.NO :				
TEST CONDITION: 1KHz / 0.25V				DIMENSION (UNIT : mm)				
ITEM	L (uH)	RDC (Ω)	IDC (A)	A	B	C		
SPEC	10 ± 10%	0.1 (MAX)	2 (MAX)	10 (MAX)	12 (MAX)	15.0 ± 2.0		
1	10.51	0.043	OK	9.29	10.79	15.45		
2	10.60	0.044	OK	9.05	10.77	15.66		
3	10.61	0.044	OK	9.37	10.93	15.29		
4	10.31	0.046	OK	9.19	10.89	15.49		
5	10.50	0.043	OK	9.36	10.85	15.57		
6	10.40	0.040	OK	9.31	10.85	15.61		
7	10.58	0.045	OK	9.38	10.84	15.45		
8	10.49	0.042	OK	9.19	10.79	15.31		
9	10.29	0.041	OK	9.38	10.82	15.65		
10	10.57	0.043	OK	9.41	10.89	15.52		
\bar{X}	10.486	0.0431		9.293	10.842	15.5		
R	0.32	0.006		0.36	0.16	0.37		
TEST INSTRUMENTS HM2791 METER FOR L						APPROVED BY		
								
						CHECKED BY		
								
						DRAWN BY		
								

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw