

ALUMINUM ELECTROLYTIC CAPACITORS

APPROVAL NO.

6779

BLA 10 VC 220 (M)

SERIES

BLA



RATING

10 V 220 μ F


CASE SIZE

 \varnothing 6.3 x 7.7L

A. DIAGRAM OF DIMENSION

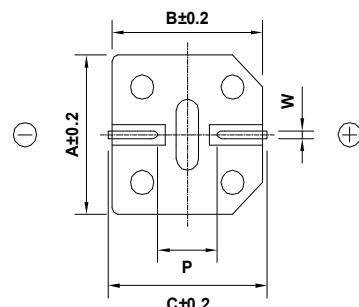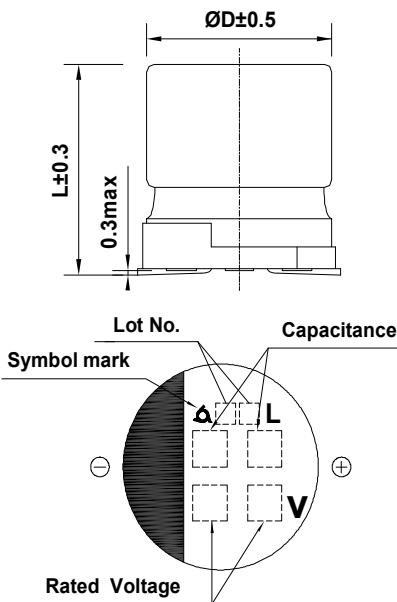

Recommended Solder land on PC board

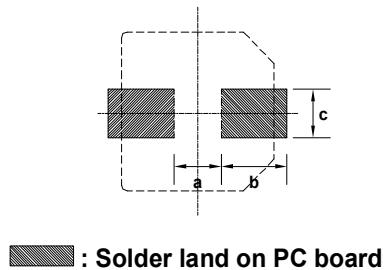

Case code	\varnothing D	L	A	B	C	W	P	a	b	c
F80	6.3	7.7	6.6	6.6	7.2	0.5-0.8	1.9	1.9	3.5	1.6

B. ELECTRICAL CHARACTERISTICS

- A. OPERATING TEMPERATURE RANGE : -40 ~ +105°C
- B. RATED VOLTAGE : 10 V_{DC}
- C. SURGE VOLTAGE : 13 V_{DC}
- D. CAPACITANCE TOLERANCE : ±20% at 20°C, 120Hz
- E. LEAKAGE CURRENT : Lower 22 μ A, after 2 minutes at 20°C
- F. DISSIPATION FACTOR (TANδ) : Lower 0.24 at 20°C, 120Hz
- G. MAX. RIPPLE CURRENT : 120 mArms at 105°C, 120Hz
- H. TEMPERATURE CHARACTERISTIC :
- * Max.Impedance ratio Z(-25°C) / Z(20°C) = 3
- Z(-40°C) / Z(20°C) = 7 (at 120Hz)

I. LOAD LIFE : The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 5,000 hours at 105°C.

- # Capacitance change ≤ ±30% of the initial value
- # Tanδ ≤ 300 % of the initial specified value
- # Leakage Current ≤ The initial specified value

J. SHELF LIFE : The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.

The rated voltage shall be applied to the capacitors for a minimum of 30 minutes, at least 24 hours and not more than 48 hours before the measurement.

- # Capacitance change ≤ ±30% of the initial value
- # Tanδ ≤ 300 % of the initial specified value
- # Leakage Current ≤ The initial specified value

K. CLEANING CONDITIONS : Solvent - proof

L. OTHERS : Satisfied characteristics KS C IEC 60384-4



SamYoung Electronics Co., Ltd.