

ALUMINUM ELECTROLYTIC CAPACITORS

APPROVAL NO.

6515

BXJ 63 VC 68 (M)

SERIES

BXJ



RATING

63 V 68 μ F

CASE SIZE


 \varnothing 10 × 10 L

A. DIAGRAM OF DIMENSIONS

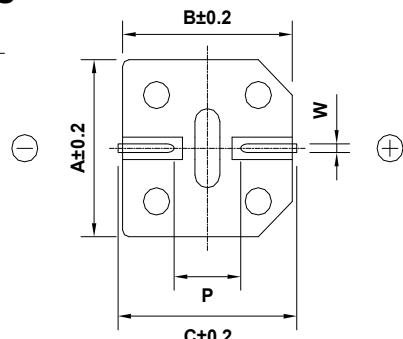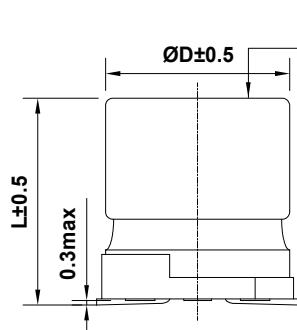

Recommended Solder land on PC board

■ : Solder land on PC board

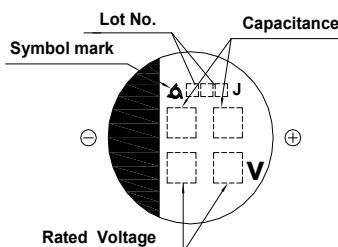

Case code	\varnothing D	L	A	B	C	W	P	a	b	c
J10	10	10	10.3	10.3	11.0	0.7-1.1	4.5	4.5	4.4	2.2

B. ELECTRICAL CHARACTERISTICS

- A. OPERATING TEMPERATURE RANGE : -55 ~ +105 °C
 B. RATED VOLTAGE : 63 V_{DC}
 C. SURGE VOLTAGE : 79 V_{DC}
 D. CAPACITANCE TOLERANCE : ± 20% at 20°C, 120Hz
 E. LEAKAGE CURRENT : Lower 42.84 μ A, after 2 minutes at 20°C
 F. DISSIPATION FACTOR (TANδ) : Lower 0.12 at 20°C, 120Hz
 G. MAX. RIPPLE CURRENT : 350 mA rms at 105 °C, 100kHz
 H. TEMPERATURE CHARACTERISTIC :
 (Max. Impedance ratio) Z(-25°C) / Z(20°C) = 3
 Z(-40°C) / Z(20°C) = 4 (at 120Hz)

I. LOAD LIFE : The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 5,000 hours at 105°C.

- # Capacitance change ≤ ±35 % of the initial value
 # Tanδ ≤ 300 % of the initial specified value
 # Leakage Current ≤ The initial specified value

J. SHELF LIFE : The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.


The rated voltage shall be applied to the capacitors for a minimum of 30 minutes, at least 24 hours and not more than 48 hours before the measurement.

- # Capacitance change ≤ ±35 % of the initial value
 # Tanδ ≤ 300 % of the initial specified value
 # Leakage Current ≤ The initial specified value

K. CLEANING CONDITIONS : Solvent - proof

L. OTHERS : Satisfied characteristics KS C IEC 60384-4

* IMP.(20 °C, 100kHz) : 0.50 (Ω) ↓

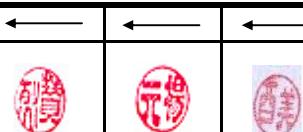

SamYoung Electronics Co., Ltd.