

No.: RDT20190415005

TO: OZDISAN

APPROVAL SHEET No. : S-1603A

Series No.: VX

Specification No.: add black

RoHS

APPROVAL SHEET
FOR CONDUCTIVE POLYMER ALUMINUM SOLID ELECTROLYTIC CAPACITORS

No.	(Customer No.)	(Koshin Part No.)	Description	Φ D x L
1		VX-016V221MF120-T/R	16V220UF	8X12
2		VX-010V221MF067-T/R	10V220UF	8X6.7
3		VX-6R3V271ME060-T/R	6.3V270UF	6.3X6.0
4		VX-6R3V221ME060-T/R	6.3V220UF	6.3X6.0

APPROVED BY:

PLEASE SIGN RETURN US ONE COPY OF THE APPROUAL SHEET.

DESIGNEDBY: Mengxiaocong CHECKEDBY: Jiangyuanyuan APPROVED BY: Huangxuehui

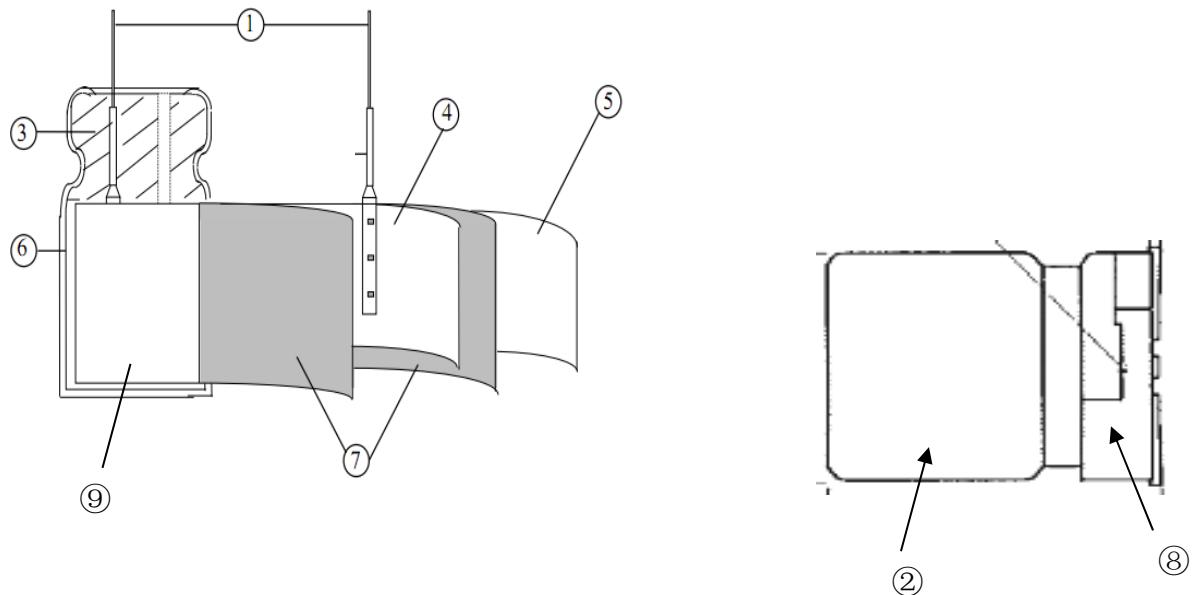
DATE: 2019-4-15

KOAS

DJS-DS-0013


KOAS

1. Inner conformation drawing and inner constitute parts (curtness drawing):



No.:	Composing part	Material
①	Lead wire	Steel+100%Tin
②	Chemical liquid	PEDOT
③	Seal	Rubber
④	Anode foil	Aluminum foil
⑤	Cathode foil	Aluminum foil
⑥	Case	Aluminum
⑦	Paper	Cellulose
⑧	Base plate	PPA
⑨	Tape	PP

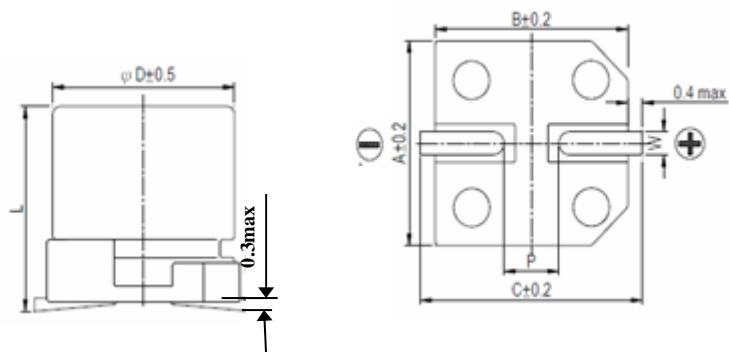Standard Size map:



Lead spacing and Diameter

Unit: mm

ΦD	L	A	B	C	W	P±0.2
8	12±0.5	8.4	8.4	9	0.7-1.1	3.1
8	6.7±0.5	8.4	8.4	9	0.7-1.1	3.1
6.3	6.0±0.5	6.6	6.6	7.2	0.5-0.8	2.0

Frequency Coefficient for Ripple Current

Frequency(Hz)	120≤F<1K	1K≤F<10K	10K≤F<100K	100K≤F<500K
Coefficient	0.05	0.3	0.7	1

KOAS

Series VX Conductive Polymer Aluminum Solid Capacitors

1. Our part No. :

For example:

<u>VX</u> Se rise code	<u>016 V</u> rated voltage	<u>221</u> capacitance	<u>M</u> tolerance	<u>F120</u> case size symbol
VX	16V	220 μ F	$\pm 20\%$	$\Phi 8 \times 12$

2. Your part No.:

3. Marking:

Include company's brand series code, rated voltage, capacitance, polarity.

4.Specifications :

4.1 Temperature range : -55~+125°C

4.2.1 Capacitance tolerance : $\pm 20\%$


4.2.2 Tangent of loss angle ($\tan \delta$) : 12% (20°C, 120HZ)

4.2.3 Leakage current (μA) :

Rated voltage (V)	2.5-50
Leakage current (μA)	Less than 0.2CV or 500 whichever is large (after 2 minutes)

Note: I : Leakage current (μA) , C : Capacitance (μF) , V : Rated DC working voltage (V)

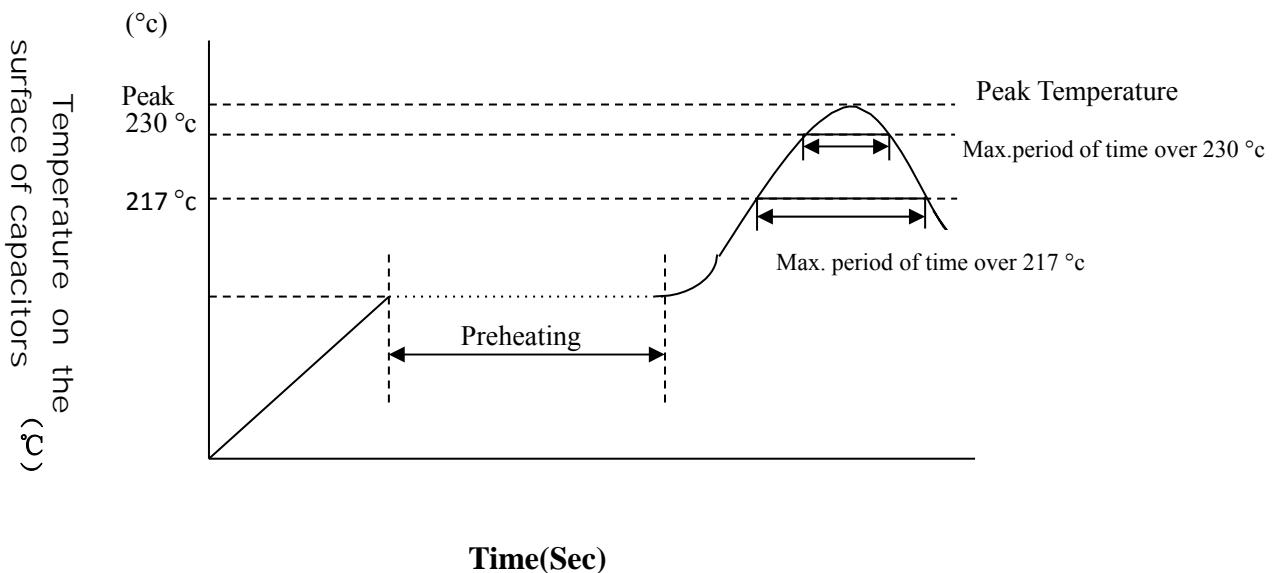RECOMMENDED SOLDERING CONDITIONS FOR ALUMINIUM SURFACE MOUNT TYPE -Air or Infrared reflow soldering





SMDshape	size	voltage	preheating	Time maintained over 217 °C	Time maintained over 230 °C	Peak temperature	Reflow number
	B52~E87	4~63V	150-180C ≤120Sec.	≤90 Sec	≤60 Sec	≤260 °C	≤2 times
		63V,80V		≤60 Sec	≤40 Sec	≤250 °C	≤2 times
	F63~G100	4~50V		≤60 Sec	≤30 Sec	≤245 °C	≤2 times
		63V~100, 400V		≤30 Sec	≤20 Sec	≤240 °C	≤2 times
	H135~K215	6.3~50V		≤30 Sec	≤20 Sec	≤240 °C	≤2 times
		63~450V		≤20 Sec	-	≤230 °C	≤2 times

Remark: Reflow number cannot over 2 times. After first time reflow , must be ensure that the temperature of capacitors became cold to room temperature(5~35°C) ,then continue second flow.

1. Scope:

This specification applies to conductive polymer aluminum solid capacitors used in electronic equipment.

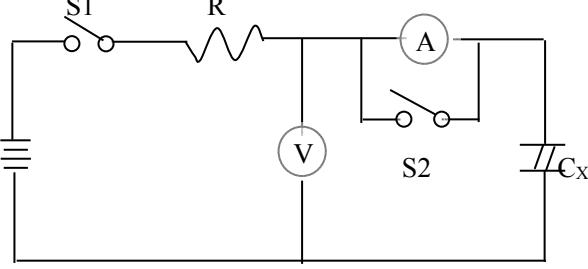2. Electrical characteristics:

NO	ITEM	TEST METHOD	SPECIFICATION																							
2.1	Rated voltage		Voltage range、capacitance range ,see specification of this series																							
2.2	Capacitance	1.Measuring frequency: $120\text{Hz}\pm 12\text{Hz}$ 2.Measuring voltage: $\leq 0.5\text{Vrms}+0.5\text{VDC}\sim 2.0\text{VDC}$																								
2.3	Dissipation factor	3.Measuring circuit: ()																								
2.4	Leakage current	DC leakage current shall be measured after 1~2minutes application of the DC rated working voltage through the $1000\ \Omega$ resistor at 20°C  R: $1000\ \Omega$ $100\ \Omega$ A: DC current meter V: DC voltage meter S1: Switch S2: Switch for protect of current meter C_x : Testing capacitor	Dissipation factor, leakage current, see specification of this series.																							
2.5	Temperature characteristics	<table border="1"> <thead> <tr> <th>STEP</th> <th>TEMPERATURE</th> <th>ITEM</th> <th>CHARACTERISTICS</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>$20^\circ\text{C}\pm 2^\circ\text{C}$</td> <td>Measure: Capacitance 、 $\tan\delta$、 Impedance</td> <td>-----</td> </tr> <tr> <td>2</td> <td>$-55^\circ\text{C}\pm 3^\circ\text{C}$</td> <td>$Z-55^\circ\text{C}/20^\circ\text{C}$</td> <td>$\leq 1.25$</td> </tr> <tr> <td>3</td> <td>Keep at 15 to 35°C for 15 minutes or more</td> <td>-----</td> <td>-----</td> </tr> <tr> <td>4</td> <td>$125^\circ\text{C}\pm 3^\circ\text{C}$</td> <td>$Z125^\circ\text{C}/20^\circ\text{C}$</td> <td>$\leq 1.25$</td> </tr> <tr> <td>5</td> <td>$20^\circ\text{C}\pm 2^\circ\text{C}$</td> <td>$\Delta C/C\ 20^\circ\text{C}$ $\tan\delta$</td> <td>Within $\pm 5\%$ of step1 Less than or equal to the value</td> </tr> </tbody> </table> <p>a. $Z-55^\circ\text{C}$ or 125°C / $Z\ 20^\circ\text{C}$: impedance ratio at 100kHz; b. $\Delta C/C\ 20^\circ\text{C}$: Capacitance change at 120Hz; $\tan\delta$ at 120H</p>	STEP	TEMPERATURE	ITEM	CHARACTERISTICS	1	$20^\circ\text{C}\pm 2^\circ\text{C}$	Measure: Capacitance 、 $\tan\delta$ 、 Impedance	-----	2	$-55^\circ\text{C}\pm 3^\circ\text{C}$	$Z-55^\circ\text{C}/20^\circ\text{C}$	≤ 1.25	3	Keep at 15 to 35°C for 15 minutes or more	-----	-----	4	$125^\circ\text{C}\pm 3^\circ\text{C}$	$Z125^\circ\text{C}/20^\circ\text{C}$	≤ 1.25	5	$20^\circ\text{C}\pm 2^\circ\text{C}$	$\Delta C/C\ 20^\circ\text{C}$ $\tan\delta$	Within $\pm 5\%$ of step1 Less than or equal to the value
STEP	TEMPERATURE	ITEM	CHARACTERISTICS																							
1	$20^\circ\text{C}\pm 2^\circ\text{C}$	Measure: Capacitance 、 $\tan\delta$ 、 Impedance	-----																							
2	$-55^\circ\text{C}\pm 3^\circ\text{C}$	$Z-55^\circ\text{C}/20^\circ\text{C}$	≤ 1.25																							
3	Keep at 15 to 35°C for 15 minutes or more	-----	-----																							
4	$125^\circ\text{C}\pm 3^\circ\text{C}$	$Z125^\circ\text{C}/20^\circ\text{C}$	≤ 1.25																							
5	$20^\circ\text{C}\pm 2^\circ\text{C}$	$\Delta C/C\ 20^\circ\text{C}$ $\tan\delta$	Within $\pm 5\%$ of step1 Less than or equal to the value																							

KOAS

NO.	ITEM	TEST METHOD	SPECIFICATION
2.6	Surge test	Rated surge voltage shall be applied (switch on) for 30 ± 5 second and then shall be applied (switch off) with discharge for 5 ± 0.5 min at room temperature. This cycle shall be repeated for 1000 cycles. Duration of one cycle is 6 ± 0.5 minutes, Test temperature: 15°C - 35°C .	<p>Capacitance change: within $\pm 15\%$ of the initial specified value.</p> <p>$\tan \delta$: 150% or less of the specified value</p> <p>ESR: 150% or less of the specified value</p> <p>Leakage current: Within initial specified value.</p>

3. Mechanical characteristics :

NO.	ITEM	TEST METHOD	SPECIFICATION
3.1	Vibration resistance	<p>The frequency of the vibration shall vary uniformly within the range 10 to 55 Hz with the amplitude of 0.75mm, completing the cycle in the internal of one minute.</p> <p>The capacitor shall be securely mounted by its leads with hold the body of capacitor.</p> <p>The capacitor shall be vibrated in three mutually perpendicular directions for a period of 2 hours in each direction.</p>	<p>Appearance: no abnormal.</p> <p>Capacitance change: within $\pm 5\%$ of initial measured value.</p>
3.2	Solder ability	The leads are dipped in the solder bath of Sn at $235^{\circ}\text{C} \pm 5^{\circ}\text{C}$ for 2 ± 0.5 seconds. The dipping depth should be set at 1.5~2.0 mm.	The solder alloy shall cover the 95% or more of dipped lead's area.


4. Reliability:

NO.	ITEM	TEST METHOD	SPECIFICATION
4.1	Soldering heat resistance	The leads immerse in the solder bath of Sn at 260°C±5°C for 10 ± 1 seconds until a distance of 1.5~2.0mm from the case.	No visible damage or leakage of electrolyte. Capacitance change: Within $\pm 5\%$ of the initial measured value ESR: 150% or less of the specified value Leakage current: Less than initial specified value. Leakage current: Less than specified value
4.2	Damp head (steady state)	Subject the capacitor to $60^\circ\text{C} \pm 2^\circ\text{C}$ and 90% to 95% relative humidity for 1000 ± 48 hours.	Capacitance change: Within $\pm 20\%$ of the initial measured value Tan δ : Less than or equal to 1. 5 times of the value. Leakage current: Less than specified value ESR: Less than or equal to 1.5times of the value.
4.3	Load life	After 2000 hours continuous application of max allowable ripple current and DC rated voltage at $125^\circ\text{C} \pm 2^\circ\text{C}$, Measurements shall be performed after 16 hours exposed at room temperature.	Capacitance change: Within $\pm 20\%$ of the initial value. Tan δ : 150% or less of the specified value ESR: 150% or less of the specified value Leakage current: Less than initial specified value. Appearance :no Abnormal

4.3	Rapid change or temperature	<p>125±3°C Room temperature -55±3°C</p> <p>30±3min. 3 min or less 30±3min. 3 min or less</p> <p>1 cycle (Fig.1)</p> <p>Applied voltage: without load. Cycle number: 5 Cycles. Test diagram: Fig.1</p>	<p>Capacitance change: Within $\pm 10\%$ of the specified capacitance.</p> <p>Tan δ : Less than initial specified value.</p> <p>Leakage current: Less than initial specified value.</p>
-----	-----------------------------	---	--

5. Marking **For example:**

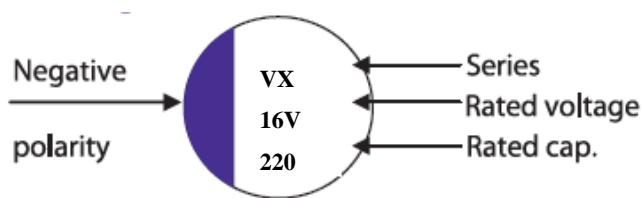5.1 Marking on capacitors include:




- 1>. Series
- 2>. Rated voltage
- 3>. Normal capacitance (u F)
- 4>. Polarity

5.2 Marking color: Blue

KOAS

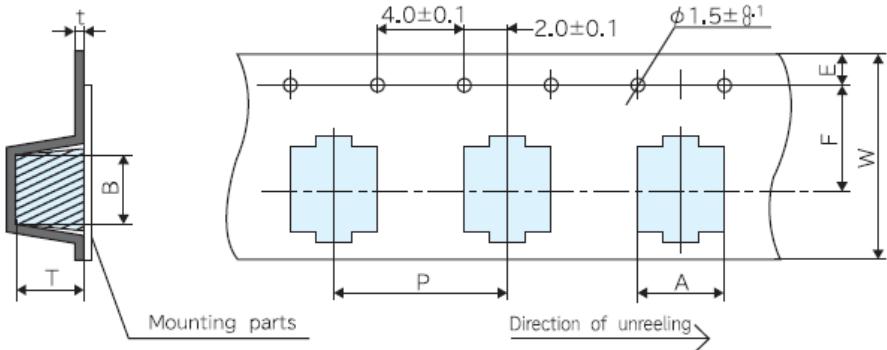Carrier Pack Taping Specification:




Product size table

Unit: mm

Dimension Size Code	A	B	W	F	E	P	t	T
Φ 6.3(EO60)	7.0±0.2	7.0±0.2	16	7.5	1.75±0.1	12	0.6max	6.3±0.3
Φ 8(F067)	8.7±0.2	8.7±0.2	24	11.5	1.75±0.1	16	0.6max	8.8±0.2
Φ 8(F120)	8.7±0.2	8.7±0.2	24	11.5	1.75±0.1	16	0.6max	13±0.2



Polarity:

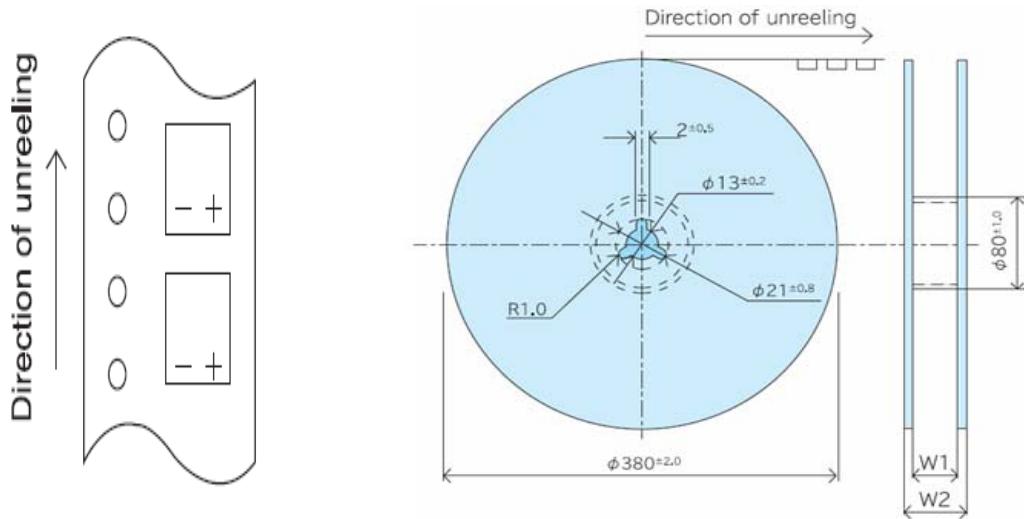Package for SMD Type:



Size Code	W1(mm)	W2(mm)	Q'ty/Reel	Q'ty(pcs/reel)
Φ 6.3(E060)	18±0.5	22.5±1.0	1000PCS	10,000
Φ 8(F067)	26±0.5	30.5±1.0	500PCS	3,000
Φ 8(F120)	26±0.5	30.5±1.0	400PCS	2,400

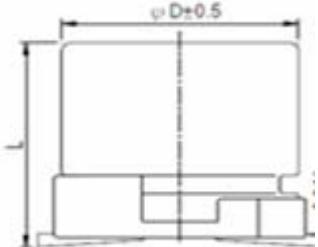
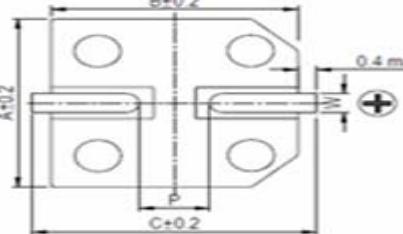
Conductive Polymer Aluminum Solid Electrolytic Capacitors Specification

Series	VX	16 V 220 μ F	Part No.	VX-016V221MG120-T/R																							
Customer No.	/		Case size	Φ D 8 X L 12																							
Specification	Items		Standard																								
	Operating temperature range		- 55 ~ + 125 °C																								
	Capacitance tolerance		$\pm 20\%$ (20°C , 120Hz)																								
	Dissipation factor (MAX)		(Less than) 12% (20°C , 120Hz)																								
	Leakage current (MAX)		(Less than) 704 μ A (20°C 16 V 2 min)																								
	E S R (MAX)		20 m Ω (100KHz , 20°C)																								
	Ripple current (MAX)		1800mA _{rms} (100kHz , 125°C)																								
	Ripple current (MAX)		4500 mA _{rms} (100kHz , 105°C)																								
	Load life		2000 hrs																								
Outline	Marking color		Blue																								
	(Dimensions)																										
																											
																											
<table border="1"> <thead> <tr> <th colspan="6">Lead spacing and Diameter</th> <th>(unit):mm</th> </tr> <tr> <th>ΦD</th> <th>L</th> <th>A</th> <th>B</th> <th>C</th> <th>W</th> <th>P± 0.2</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>12.0± 0.5</td> <td>8.4</td> <td>8.4</td> <td>9</td> <td>0.7~1.1</td> <td>3.1</td> </tr> </tbody> </table>							Lead spacing and Diameter						(unit):mm	Φ D	L	A	B	C	W	P ± 0.2	8	12.0 ± 0.5	8.4	8.4	9	0.7~1.1	3.1
Lead spacing and Diameter						(unit):mm																					
Φ D	L	A	B	C	W	P ± 0.2																					
8	12.0 ± 0.5	8.4	8.4	9	0.7~1.1	3.1																					
Recorder	(The first edition) :2019-4-15																										
Wrote by: Mengxiaocong		Checked by: Jiangyuanyuan		Approved by: Huangxuehui																							

Conductive Polymer Aluminum Solid Electrolytic Capacitors Specification



Series	VX	10 V 220 μ F	Part No.	VX-010V221MF067-T/R														
Customer No.	/		Case size	$\Phi D 8 \times L 6.7$														
Specification	Items		Standard															
	Operating temperature range		- 55 ~ + 125 °C															
	Capacitance tolerance		$\pm 20\%$ (20°C , 120Hz)															
	Dissipation factor (MAX)		(Less than) 12% (20°C , 120Hz)															
	Leakage current (MAX)		(Less than) 500 μ A (20°C 10 V 2 min)															
	E S R (MAX)		26 m Ω (100KHz , 20°C)															
	Ripple current (MAX)		1120 mA _{rms} (100kHz , 125°C)															
	Ripple current (MAX)		2800 mA _{rms} (100kHz , 105°C)															
	Load life		2000 hrs															
Outline	Marking color		Blue															
	(Dimensions)																	
Lead spacing and Diameter		(unit):mm																
<table border="1"> <thead> <tr> <th>ΦD</th><th>L</th><th>A</th><th>B</th><th>C</th><th>W</th><th>$P \pm 0.2$</th></tr> </thead> <tbody> <tr> <td>8</td><td>6.7 ± 0.5</td><td>8.4</td><td>8.4</td><td>9</td><td>0.7~1.1</td><td>3.1</td></tr> </tbody> </table>		ΦD			L	A	B	C	W	$P \pm 0.2$	8	6.7 ± 0.5	8.4	8.4	9	0.7~1.1	3.1	
ΦD	L	A	B	C	W	$P \pm 0.2$												
8	6.7 ± 0.5	8.4	8.4	9	0.7~1.1	3.1												
Recorder	(The first edition) :2019-4-15																	
Wrote by: Mengxiaocong		Checked by: Jiangyuanyuan		Approved by: Huangxuehui														

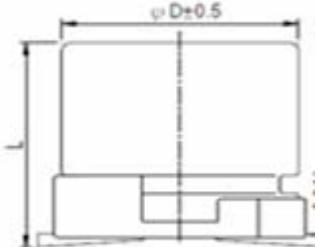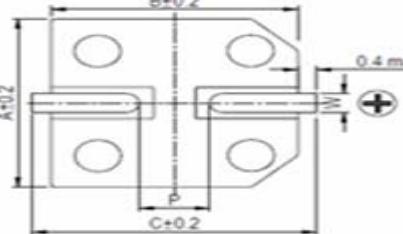Conductive Polymer Aluminum Solid Electrolytic Capacitors Specification

Series	VX	6.3V 270 μ F	Part No.	VX-6R3V271ME060-T/R																					
Customer No.	/		Case size	ΦD 6.3X L6.0																					
Specification	Items		Standard																						
	Operating temperature range		- 55 ~ + 125 °C																						
	Capacitance tolerance		$\pm 20\%$ (20°C , 120Hz)																						
	Dissipation factor (MAX)		(Less than) 12% (20°C , 120Hz)																						
	Leakage current (MAX)		(Less than) 500 μ A (20°C 6.3 V 2 min)																						
	E S R (MAX)		26 m Ω (100KHz , 20°C)																						
	Ripple current (MAX)		840 mA _{rms} (100kHz , 125°C)																						
	Ripple current (MAX)		2100 mA _{rms} (100kHz , 105°C)																						
	Load life		2000 hrs																						
Outline	Marking color		Blue																						
	(Dimensions)																								
	 																								
<table border="1"> <thead> <tr> <th colspan="6">Lead spacing and Diameter</th> <th>(unit):mm</th> </tr> <tr> <th>ΦD</th> <th>L</th> <th>A</th> <th>B</th> <th>C</th> <th>W</th> <th>P± 0.2</th> </tr> </thead> <tbody> <tr> <td>6.3</td> <td>6.0± 0.5</td> <td>6.6</td> <td>6.6</td> <td>7.2</td> <td>0.5~0.8</td> <td>2</td> </tr> </tbody> </table>		Lead spacing and Diameter						(unit):mm	ΦD	L	A	B	C	W	P ± 0.2	6.3	6.0 ± 0.5	6.6	6.6	7.2	0.5~0.8	2			
Lead spacing and Diameter						(unit):mm																			
ΦD	L	A	B	C	W	P ± 0.2																			
6.3	6.0 ± 0.5	6.6	6.6	7.2	0.5~0.8	2																			
Recorder	(The first edition) :2019-4-15																								
Wrote by: Mengxiaocong		Checked by: Jiangyuanyuan		Approved by: Huangxuehui																					

(Issue No.): DJJ-2875

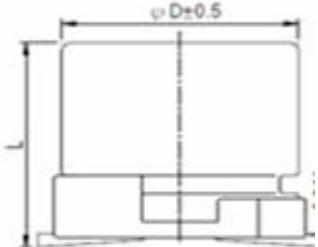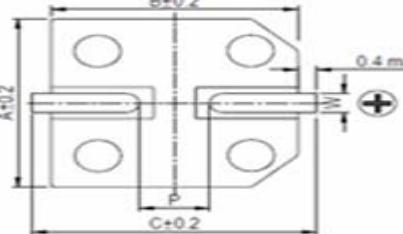Conductive Polymer Aluminum Solid Electrolytic Capacitors Specification

Series	VX	6.3V 220 μ F	Part No.	VX-6R3V221ME060-T/R			
Customer No.	/		Case size	ΦD 6.3X L6.0			
Specification	Items		Standard				
	Operating temperature range		- 55 ~ + 125 °C				
	Capacitance tolerance		$\pm 20\%$ (20°C , 120Hz)				
	Dissipation factor (MAX)		(Less than) 12% (20°C , 120Hz)				
	Leakage current (MAX)		(Less than) 500 μ A (20°C 6.3 V 2 min)				
	E S R (MAX)		26 m Ω (100KHz , 20°C)				
	Ripple current (MAX)		840 mA _{rms} (100kHz , 125°C)				
	Ripple current (MAX)		2100 mA _{rms} (100kHz , 105°C)				
	Load life		2000 hrs				
Outline	Marking color		Blue				
	(Dimensions)						
	 						
Recorder		Lead spacing and Diameter (unit):mm					
		ΦD	L	A	B	C	W
Wrote by: Mengxiaocong		Checked by: Jiangyuanyuan		Approved by: Huangxuehui			