

This product is completed the Lead-free & RoHS2.0 & Halogen-free.

Customer : Ozdisan

Issued Date	2023-01-31
No.	RD20230131007

SPECIFICATION FOR APPROVAL

No.	Customer No.	Koshin Part No.	Description	ΦD x L
1		PKRH-400V4R7MF115-T/A3.5	400V4.7μF	8X11.5




KOSHIN INTERNATIONAL LIMITED

Headquarters

Unit 9-10,16/F,New commerce Centre,19 On Sun Street,Siu Lek Yuen,Shatin,N.T.,Hong kong
TEL: (852) 2690 0609 FAX: (852) 2697 9532

Manufacturing Sites

- No.4-6 West Zone,Shangxue Technology Industrial City,Bantian,Longgang,Shenzhen,China
TEL: +86-0755-89500370 89500371 FAX: +86-0755-89500348
- Koshin Technology Industrial Zone South Huancheng Road,LinWu,Chenzhou,Hunan
Provice,China
TEL: +86-0735-6252288 Postal code:424300

KOSHIN APPROVED SIGNATURE FOR KOSHIN			APPROVED SIGNATURE FOR CUSTOMER
APPROVAL	CHECK	DESIGN	APPROVED BY
			

Please return one copy with your authorized signature when you accept these specifications.

DJS-SD-0013

CONTENTS

NO.	ITEMS
1	Scope
2	Operating Temperature Range
3	Characteristics
4	Frequency Coefficient for Ripple Current
5	Coefficient of Temperature for Ripple Current
6	Max. Impedance Ratio
7	Characteristics Table
8	Marking
9	Inner conformation drawing and inner constitute parts(accuracy drawing)
10	Electrical Characteristics
11	Mechanical Characteristics
12	Reliability
13	Koshin Part No.
14	Product Processing Diagram
15	Packing
16	Guidelines and Precautions

1.Scope

This specification covers“KRH series” miniature single-ended aluminium electrolytic capacitors.

2.Operating Temperature Range

Operating temperature range is the range of ambient temperature at which the capacitor can be operated continuously at rated voltage.

3.Characteristics

Unless otherwise specified, the standard range of atmospheric conditions for making measurements and tests are as follows.

Ambient temperature : 15 to 35℃

Air pressure: 86kpa to 106kpa

If there may be doubt on the results, measurements shall be made within the following limits.

Ambient temperature : 20±2℃

Air pressure: 86kpa to 106kpa

4.Frequency Coefficient for Ripple Current

Frequency (Hz) \ Capacitance(μF)	Frequency (Hz)				
	120	400	1K	10K	100K
CAP≤10	1.00	1.62	1.91	2.50	2.94
10<CAP≤100	1.00	1.89	1.94	1.54	2.70
100<CAP	1.00	1.34	1.50	1.73	1.92

5.Coefficient of Temperature for Ripple Current

Temperature (℃)	65℃	85℃	105℃
Coefficient	2.00	1.65	1.00

NOTE:Temperature coefficient is not used in life formula but for reference.

6.Max. Impedance Ratio



Low temperature characteristics	Rated voltage(V)		6.3	10	16	25	35	50	63	100	160-250	350-450	120Hz	
	Impedance ratio (max)	Z(-25℃)/Z(+20℃)	4	3	2	2	2	2	2	2	2	3		3
		Z(-40℃)/Z(+20℃)	8	6	4	4	3	3	3	3	3	8		-

7.Characteristics Table

Aluminum Electrolytic Capacitor Specification				
Series	PKRH	400 V 4.7 μ F	Part No.	PKRH-400V4R7MF115-T/A3.5
Customer No.	/		Case size	Φ D8 X L11.5
Specification	Items		Standard	
	Operating temperature range		- 25~ + 105 $^{\circ}$ C	
	Capacitance tolerance		\pm 20% (20 $^{\circ}$ C ,120Hz)	
	Dissipation factor (MAX)		Less than 0.15 (20 $^{\circ}$ C ,120Hz)	
	Leakage current (MAX)		Less than 56.4 μ A (20 $^{\circ}$ C 400 V 1 min)	
	ESR (MAX)		/	
	Ripple current (MAX)		67 mArms (120Hz ,105 $^{\circ}$ C)	
	Load life		5000 hrs	
Outline	Dimensions			
	<p>Technical drawing of an aluminum electrolytic capacitor. The side view shows a cylindrical body with a vent on top, a sleeve, and two leads. Dimensions include a height of 8+0.5 max, a diameter of 11.5 \pm 1.5 max, a sleeve length of 15 min, and a lead length of 4 min. Labels include 'Vent', 'Sleeve', 'Copper clad steel wire(tinned) Φ0.5\pm0.05', and 'Markings'. The top view shows a circular body with a lead space of 3.5\pm0.5. A note states '[Remarks:Taping space: 3.5\pm0.5]' and the unit is 'Unit:mm'.</p>			
APPROVAL		CHECK		DESIGN
<p>R&D Jan.31.2023 Alex Shen</p>		<p>R&D Jan.31.2023 Li Luo</p>		<p>R&D Jan.31.2023 X.J.Deng</p>

8. Marking

8.1 Marking on capacitors include:

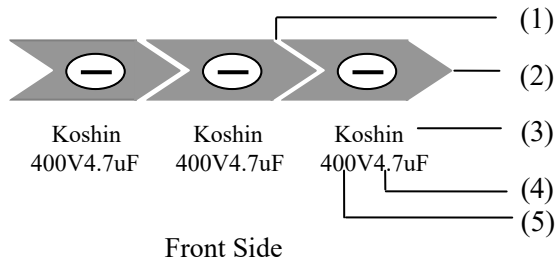


NO.	ITEM
1	Direction of current
2	Polarity
3	Brand
4	Voltage
5	Capacity
6	Series
7	Temperature
8	Tolerance
9	© / Sleeve material (PET)

8.2 Marking color :

Sleeve color: Black PET



Marking color: White

9.Inner conformation drawing and inner constitute parts(curtness drawing)

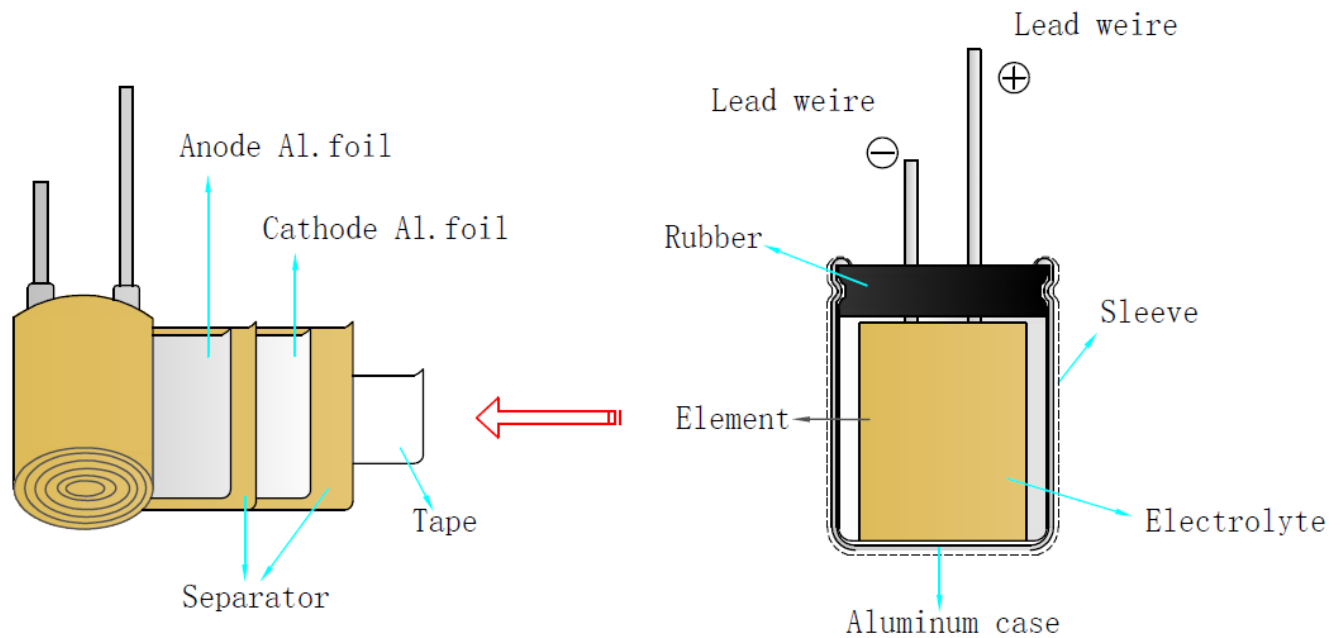

Composing Parts	Material
Anode Foil	Aluminum Foil
Cathode Foil	Aluminum Foil
Paper	Cellulose
Lead Wire	Fe+Al+Cu+Sn
Lead Wire	Fe+Al+Cu+Sn
Seal	Rubber
Case	Aluminum
Sleeve	PET
Electrolyte	EG
Tape	OPP

10. Electrical Characteristics :

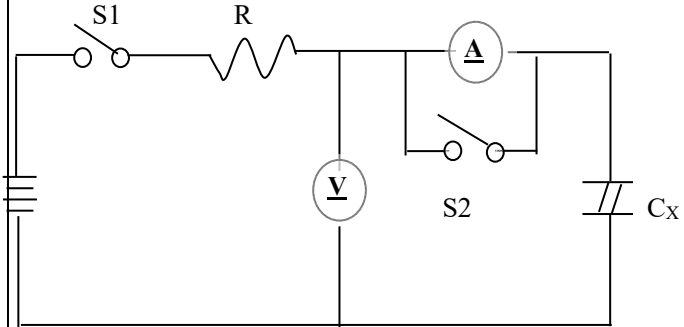NO.	ITEM	TEST METHOD		SPECIFICATION															
10.1	Rated voltage	400V		See 6.Characteristics Table															
10.2	Capacitance	1.Measuring frequency:120Hz±12Hz 2.Measuring voltage:≤0.5Vrms+0.5VDC~2.0VDC Measuring circuit: ()																	
10.3	Dissipation factor																		
10.4	Leakage current	DC leakage current shall be measured after 1~2minutes application of the DC rated working voltage through the 1000 Ω resistor at 20℃		6.3V-100V: Less than 0.01CV or 3μA, whichever is large (at 20℃, after 1 minutes) 160V-450V: Less than 0.03CV or 3μA, whichever is large (at 20℃, after 1 minutes)															
				I: Leakage current(μA) C: Capacitance(μF) V: Rated voltage (V)															
		R: 1000Ω A: DC current meter V: DC voltage meter S1:Switch S2:Switch for protect of current mete Cx: Testing capacitor																	
10.5	Temperature characteristics	<table border="1"> <thead> <tr> <th>STEP</th> <th>TEMPERATURE</th> <th>STORAGE TIME</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>20℃ ± 2℃</td> <td>30minutes</td> </tr> <tr> <td>2</td> <td>-40℃ ± 3℃ -25℃ ± 3℃</td> <td>2hours</td> </tr> <tr> <td>3</td> <td>20℃ ± 2℃</td> <td>30minutes</td> </tr> <tr> <td>4</td> <td>105℃ ± 2℃</td> <td>2hours</td> </tr> </tbody> </table>	STEP	TEMPERATURE	STORAGE TIME	1	20℃ ± 2℃	30minutes	2	-40℃ ± 3℃ -25℃ ± 3℃	2hours	3	20℃ ± 2℃	30minutes	4	105℃ ± 2℃	2hours	Step1.Measure the capacitance and impedance. (Z , 20℃, 120Hz±2Hz) Step2. Measure the impedance at thermal balance after 2 hours. (Z , -40℃ -25℃, 120Hz±2Hz) Step4.Measure the leakage current at thermal balance after 2 hour.	Step2. Low temperature impedance stability Less than specified value. Step4. Capacitance change: within ± 10% of the initial measured value. Dissipation factor: Less than specified value.
STEP	TEMPERATURE	STORAGE TIME																	
1	20℃ ± 2℃	30minutes																	
2	-40℃ ± 3℃ -25℃ ± 3℃	2hours																	
3	20℃ ± 2℃	30minutes																	
4	105℃ ± 2℃	2hours																	

NO.	ITEM	TEST METHOD	SPECIFICATION																																
10.6	Surge test	<p>Rated surge voltage shall be applied (switch on) for 30±5 second and then shall be applied (switch off) with discharge for 5.5min at room temperature. This cycle shall be repeated for 1000 cycles. Duration of one cycle is 6±0.5 minutes.</p> <p>Surge voltage:</p> <table border="1"> <tr> <td>Working voltage (V)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> </tr> <tr> <td>Surge voltage (V)</td> <td>8</td> <td>13</td> <td>20</td> <td>32</td> <td>44</td> <td>63</td> <td>79</td> <td>125</td> </tr> </table> <table border="1"> <tr> <td>Working voltage (V)</td> <td>160</td> <td>200</td> <td>250</td> <td>350</td> <td>400</td> <td>450</td> </tr> <tr> <td>Surge voltage (V)</td> <td>200</td> <td>250</td> <td>300</td> <td>400</td> <td>450</td> <td>500</td> </tr> </table>	Working voltage (V)	6.3	10	16	25	35	50	63	100	Surge voltage (V)	8	13	20	32	44	63	79	125	Working voltage (V)	160	200	250	350	400	450	Surge voltage (V)	200	250	300	400	450	500	<p>Capacitance change: within±15% of the initial specified value.</p> <p>Dissipation factor: Less than specified value.</p> <p>Leakage current: Within initial specified value.</p>
Working voltage (V)	6.3	10	16	25	35	50	63	100																											
Surge voltage (V)	8	13	20	32	44	63	79	125																											
Working voltage (V)	160	200	250	350	400	450																													
Surge voltage (V)	200	250	300	400	450	500																													


11. Mechanical Characteristics:

NO.	ITEM	TEST METHOD	SPECIFICATION																
11.1	Lead strength	<p>(A) Tensile strength: Wire lead terminal:</p> <table border="1"> <tr> <td>d(mm)</td> <td>≤0.5</td> <td>0.5<d≤0.8</td> <td>0.8<d≤1.25</td> </tr> <tr> <td>load(kg)</td> <td>0.5</td> <td>1.0</td> <td>2.0</td> </tr> </table> <p>The capacitor shall withstand the constant tensile force specified between the body and each lead for 10seconds without damage either mechanical or electrical.</p> <p>(B) Bending strength: Wire lead terminal:</p> <table border="1"> <tr> <td>d(mm)</td> <td>≤0.5</td> <td>0.5<d≤0.8</td> <td>0.8<d≤1.25</td> </tr> <tr> <td>load(kg)</td> <td>0.5</td> <td>0.5</td> <td>1.0</td> </tr> </table> <p>With the capacitor in a vertical position apply the load specified axially to each lead. The capacitor shall be rotated slowly from the vertical to the horizontal position, back to the vertical position. The 90° in the opposite direction and back the original position. Performance of capacitor shall not have change and leads shall be undamaged.</p>	d(mm)	≤0.5	0.5<d≤0.8	0.8<d≤1.25	load(kg)	0.5	1.0	2.0	d(mm)	≤0.5	0.5<d≤0.8	0.8<d≤1.25	load(kg)	0.5	0.5	1.0	<p>When the capacitance is measured, there shall be no intermittent contacts, or open-or short-circuiting.</p> <p>There shall be no such mechanical damage as terminal damage etc.</p>
d(mm)	≤0.5	0.5<d≤0.8	0.8<d≤1.25																
load(kg)	0.5	1.0	2.0																
d(mm)	≤0.5	0.5<d≤0.8	0.8<d≤1.25																
load(kg)	0.5	0.5	1.0																

NO.	ITEM	TEST METHOD	SPECIFICATION
11.2	Vibration resistance	The frequency of the vibration shall vary uniformly within the range 10 to 55 Hz with the amplitude of 0.75mm, completing the cycle in the internal of one minute. The capacitor shall be securely mounted by its leads with hold the body of capacitor. The capacitor shall be vibrated in three mutually perpendicular directions for a period of 2 hours in each direction.	Capacitance: no unsteady. Appearance: no abnormal. Capacitance change: within $\pm 5\%$ of initial measured value.
11.3	Solder-ability	The leads are dipped in the solder bath of Sn at $245^{\circ}\text{C}\pm 5^{\circ}\text{C}$ for 2 ± 0.5 seconds. The dipping depth should be set at 1.5~2.0 mm.	The solder alloy shall cover the 95% or more of dipped lead's area.

12. Reliability:

NO.	ITEM	TEST METHOD	SPECIFICATION
12.1	Soldering heat resistance	The leads immerse in the solder bath of Sn at $260^{\circ}\text{C}\pm 5^{\circ}\text{C}$ for 10 ± 1 seconds until a distance of 1.5~2.0mm from the case.	No visible damage or leakage of electrolyte. Capacitance change: Within $\pm 5\%$ of the initial measured value Tan δ : Less than specified value. Leakage current: Less than specified value
12.2	Moisture Resistance	Subject the capacitor to $40^{\circ}\text{C}\pm 2^{\circ}\text{C}$ and 90% to 95% relative humidity for 504 hours.	Capacitance change: Within $\pm 20\%$ of the initial measured value Tan δ : Less than 1.2 specified value. Leakage current: Less than specified value

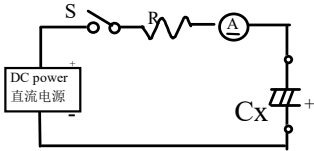NO.	ITEM	TEST METHOD	SPECIFICATION
12.3	Load life	After 5000 hours continuous application of DC rated working voltage and rated ripple current at 105°C±2°C, Measurements shall be performed after 16 hours exposed at room temperature.	Capacitance change: within±20% of the initial specified value. Dissipation factor: Less than 200% of the initial specified value.
12.4	Shelf life	After storage for 1000 hours at 105°C±2°C without voltage application, at operating temperature which the capacitor can be operated continuously at rated voltage 30 min, Measurements shall be performed after exposed for 16 hrs after application of Testing.	Leakage current: Within initial specified value.
12.5	Storage at low temperature	The capacitor shall be stored at temperature of -40°C±3°C for 16 hours, during which time be subjected to standard atmospheric conditions for 16 hours or more. After which measurements shall be made.	Capacitance change: Within ±10% of the initial value. Tanδ:less than specified value Leakage current: Less than specified value. Appearance :no Abnormal.
12.6	Pressure relief	DC test: Send the following electricity while applying the inverse voltage. Where case size D≤22.4mm:1 A d.c.max D > 22.4mm:10 A d.c.max Note: 1.This requirement applies to capacitors with a diameter of 6 mm or more. 2. When the pressure relief device does not open even 30 minutes after commencement of test, the test may be ended.	DC test circuit  S : Switch (A) : DC current meter Cx: testing capacitor The pressure relief device shall open in such a way as to avoid any damage of fire or explosion of capacitor elements (terminal and metal foil etc.) or cover.

13.Koshin Part No.

Part Number System

KRH-400V 4R7 M F 115- T/A3.5

① ② ③ ④ ⑤ ⑥ ⑦

(1) Series

KC3	K3S	K3N	KCL	KR2	KRJ	KRN	KLS	KZL	KSH	KSJ	KLJ	KR1	KLP	KRM	KHP	KAG	KZM	KHT	KRB	KZB
KBP	KRL	KLL	KJH	KLH	KZH	KCH	KZF	KRH	KLF	KLG	KLW	KLE	KRF	K2A	K3A	KA3	KBD			

(2) Voltage(WV)

Voltage (WV)	4	6.3	10	16	25	35	50	63	80	100	110	115
Code	004	6R3	010	016	025	035	050	063	080	100	110	115

Voltage (WV)	125	160	165	200	220	250	330	350	400	450	500	550
Code	125	160	165	200	220	250	330	350	400	450	500	550

(3) Capacitance

Capacitance is show in microfarads (μF)

μF	0.1	0.47	1	2.2	22	220	2200	22000	21~25(KLT)
Code	0R1	R47	010	2R2	220	221	222	223	21T25

(4) Capacitance tolerance

Tolerance %	±5	±10	±15	±20	-0 to +100	-0 to +20	-10 to +20	-10 to +100
Code	J	K	L	M	P	R	V	W

Tolerance %	-15 to +20	-20 to +40	-20 to +80	-20 to +5	+5 to +20	-10 to +5	-30 to +20	-15 to +5
Code	N	X	E	A	B	C	D	F

(5) Case (D: mm)

Diameter	3	4	5	6	6.3	7	8	10	12.5	13	16	18	20	22	25	30
Code	A	B	C	D	E	1E	F	G	H	I	J	K	L	M	N	O

Diameter	35	36.5	40	42	45	46	50	51	52.3	55	60	63.5	65.5	76	90	100
Code	Q	R	S	T	U	V	W	X	Y	Z	1A	1B	1C	1D	1E	1F

Part Number System

(6) Case (L: mm)

Description	5	7	11	12.5	25	35.5	40	100	110	111	120	130	140	150	220	250
Code	050	070	110	125	250	355	400	A00	A10	A11	A20	A30	A40	A50	B20	B50

(7) Lead treatment

Description	Taping(F:2.5mm) Ammo Packing	Taping(F:3.5mm) Ammo Packing	Taping(F:5.0mm) Ammo Packing	Taping(F7.5mm) Ammo Packing
Code	T2.5(T/A2.5)	T/A3.5	T/A5.0(S)	T/A7.5

Description	Lead cut		Lead forming cut			Lead forming cut	Lead forming cut	Frog forming cut
	F10	L/C	F4	F12	F/C	S1	F/S	F/W
Code	F10	L/C	F4	F12	F/C	S1	F/S	F/W

Note: PET sleeve capacitors adding "Ⓟ" in Part No. System before.

14. Product Processing Diagram:

Taping size $\Phi 8$

TP3.5mm pitch tape packing

Taping code number: T/A3.5

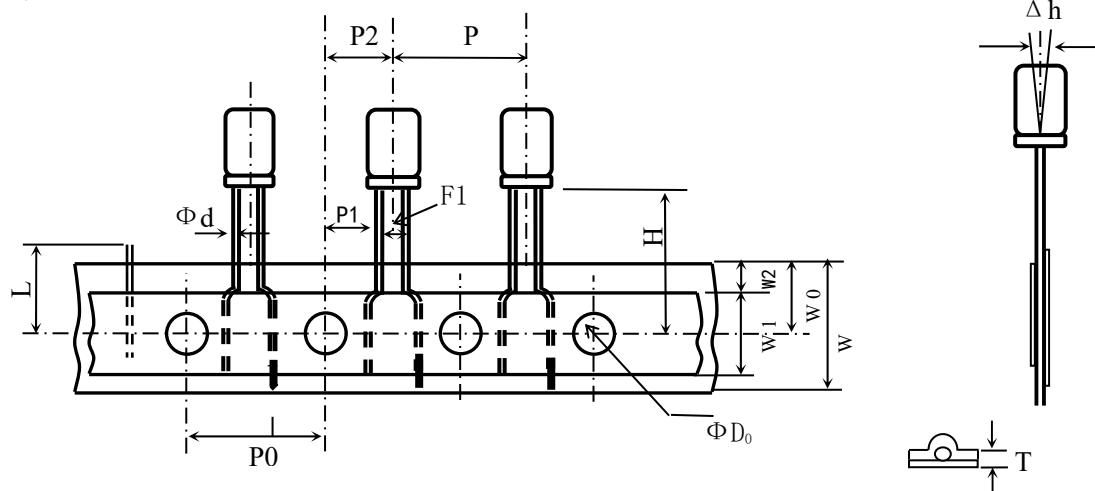




Table of dimensions

Item	Symbol	Dimension	Tolerance	Reference
Lead-wire diameter	Φd	0.5	± 0.05	
Distance between centers of leads	F1	3.5	± 0.5	
Height of component form tape center	H	18.5	+0.75 -0.5	
Component spacing	P	12.7	± 1.0	
Perforation pitch	P0	12.7	± 0.3	
Hole center to lead distance	P1	4.6	± 0.5	
Hole center to component center	P2	6.35	± 1.0	
Carrier tape width	W	18.0	± 0.5	
Hole down tape width	W0	9.0	± 0.5	
Feed hole position	W1	6.0-13.0	± 0.1	
Hole down tape width	W2	0.5-1.5	-----	
Diameter of sprocket holes	$\Phi D0$	4.0	± 0.2	
Body inclination forward or backward	Δh	0	± 1.0	
Tape base thickness	t0	0.38	± 0.05	
Total thickness of the combined carrier tape and hold down tape	T	0.7	± 0.2	
Cut off position of defectives	L	11.0	or less	

15. Packing

Packing Standards: standards of the carton


1. Standards of the inner box of tapping products.

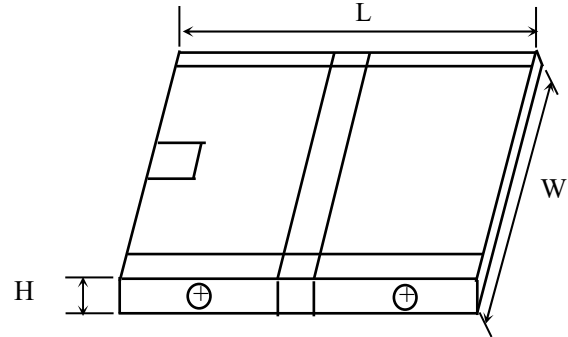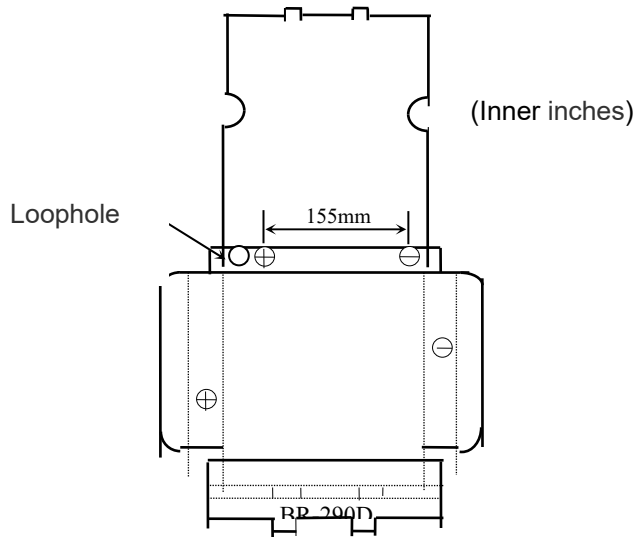

The inner box of tapping products

Specification	Size ± 2 (mm) L×W×H	Packing form	Textures	Quantity(PCS)
BR-285B	290X330X45	Tapping	H5A	1200


2. Standards of the outer box of bulk and tapping products.

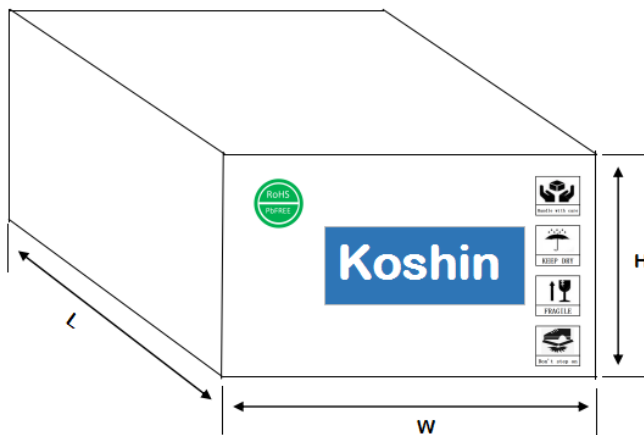

Specification	Size ± 2 (mm) L×W×H	Packing form	Textures	Quantity(PCS)
BW-605A	605X340X260	Tapping	K=K	12000

3. Label:

Series	Size(mm)	Sample
Label	90×40	As follows

Koshin Electrolytic Capacitors		
OPN:	×××× ②	
Type:	③ ⑤⑥⑦	
CPN:	④ Qty: ⑨ pcs	
①	Date: ⑩	

① Customer name

⑥ Voltage

② /

⑦ Capacity

③ Koshin Part No.

⑧ Size

④ Customer Part No.

⑨ Quantity

⑤ Series

⑩ Work order number

Cautions for Using Aluminum Electrolytic Capacitors

1. When reverse voltage is applied on DC aluminum electrolytic capacitor, the circuit will be short out and the capacitor will be damaged due to abnormal current flows through the capacitor. Please use non-polar types of capacitors when the positive voltage is applied on the cathode terminal.

2. When capacitor is used at higher voltage than the rated voltage, leakage current increased, characteristics drastically deteriorated and damaged in a short period may occur as a result. Please take extra caution that the peak voltage should not exceed the rated voltage.

3. Sudden charge and discharge

When aluminum electrolytic capacitors for general purpose-use are employed in rapid charge and discharge application, its life expectancy may be shortened resulted from capacitance decrease, heat rise, etc.

4. Storage of the capacitor

① We recommend the following conditions for storage:

Ambient temperature: 5~35°C, Ambient humidity: <75%RH;

a) Storage life: ≤ 12 months;

b) If storage life >12 months, the products need to be charged again before using;

c) If Storage time >three years, the products need to be discarded;

d) Expiry Date: calculating from the date marked on the sleeve;

e) Please keep capacitors in the original package;

f) Avoid storing the capacitors under such circumstances:

※ With water and oil or damp & dewing location.

※ With gas and oil.

※ With toxic gases such as hydrogen sulfide, sulfurous acid, nitrous acid, chlorine, bromine and methane.

※ With direct sunlight, Ozone, ultraviolet rays or radiation.

5. If excessive ripple current is applied on the capacitor, excessive heat will be generated inside, the capacitance will be reduced and capacitor's life shall be shortened. Rated voltage has been marked on the capacitor; therefore, the peak value of the ripple voltage should be less than the rated voltage.

6. Ambient temperature

Life of aluminum electrolytic capacitor is affected by the ambient temperature. It is generally known that the life doubles for each 10°C decrease in temperature.

7. Tensile strength of lead wire

When a strong force is applied to the lead wires or terminals, stress is put on the internal connections, which may result in short circuit, open circuit or increased leakage current. So it is not advisable to bend or handle a capacitor after it has been soldered to the PC board.

8. Heat resistance at the soldering process

During soldering process, secondary shrinkage or sleeve crack may occur when soldering temperature is too high or soldering time is too long.

9. Hole pitch and position of PC board

When designig a PC board , its hole pitch should be designed to coincide with the lead pitch(lead spacing) of the capacitor specified in the catalog or specifications.When a capacitor is forcibly inserted into an unmatched hole pitch,a force will put on the leads and which could result in a short circuit or increased leakage current.

10. Cleaning after soldering

① The aluminum electrolyte capacitors should be fee halogenated solvents during board cleaning after soldering. Use solvent proof capacitors when halogenated solvents are used.

② After cleaned with the solvent which should proof the quality of capacitors, the capacitors should not be kept in solvent environments of non-ventilated places. Let the capacitors after cleaning dry with hot blast fully above 10mins and the temperature of hot blast should not be over than specified upper limit of capacitors.

11. Adhesives、 fixative and coating materials(coating agent)

① Do not use halogenated adhesives and coating materials to fix aluminum electrolytic capacitors.

②Do not cover up all the sealing area of capacitors with adhesives 、 fixative or coating materials(coating agent), make coverage only partial

12. Certificates

① ISO 9001:2008 Certificate

② ISO 14001:2004 Certificate

③ISO/TS 16949:2009 Certificate

④OHSAS 18001:2007 Certificate

※ RoHS2.0 compliance

Accord with the latest standard of RoHS2.0 , if customers have any special requirments, according to the relevant agreements which signed by both parts.