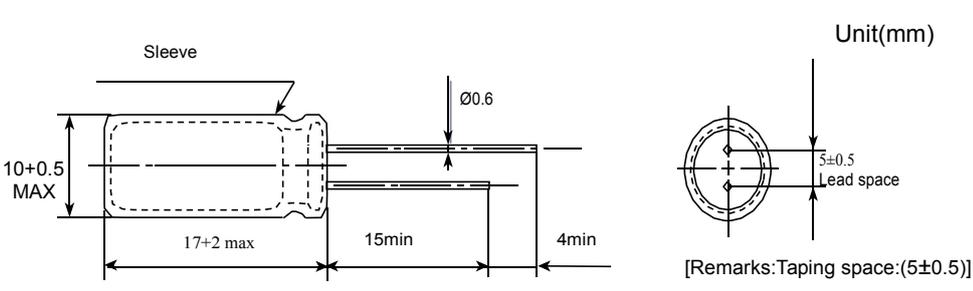


## Aluminum Electrolytic Capacitor Specification

Series	PS	25V1000uF	Part No.	PS-025V1000A170-T5
Customer no	/		Case Size	ΦD 10 x L17
Specification	Items		Standard	
	Operating temperature range		-40~+105 °C	
	Capcitanace tolenrance		±20% (20±2°C,120Hz)	
	Dissipation Factor (MAX)		(Less than) 0.16 (20±2°C,120Hz)	
	Leakage current (MAX)		(Less than) 250 (20±2°C,25V 2 min)	
	Impedance (MAX)		/	
	Ripple current (MAX)		500 mArms (120KHZ,105°C)	
	Lond life		2000hrs	
Outline	Sleeve color		Coffee	
	Marking color		White	
	(Dimensions)			
	 <p style="text-align: right;">Unit(mm)</p> <p style="text-align: center;">[Remarks: Taping space: (5±0.5)]</p>			
Recorder	(The first edition): 2018-01-19			
Wrote by: Dengweiping		Checked by: Zhangguang		Approved by: Liyan