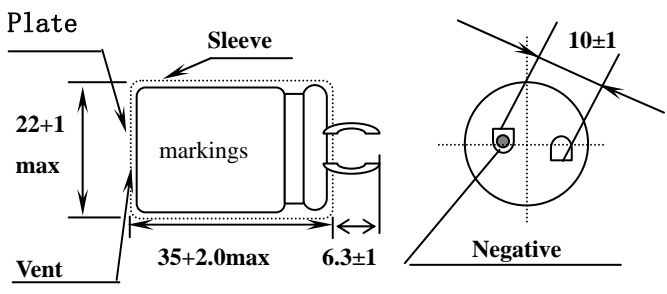


Aluminum Electrolytic Capacitor Specification

Series	K3J	400 V 100 μ F	Part No.	K3J-400V101MM350
Issue No.			Case size	Φ D 22 X L 35
Specification	Items		Standard	
	Operating temperature range		-25 ~ + 105 $^{\circ}$ C	
	Capacitance tolerance		\pm 20%(20 $^{\circ}$ C , 120Hz)	
	Dissipation factor (MAX)		(Less than) 0.15 (20 $^{\circ}$ C , 120Hz)	
	Leakage current (MAX)		(Less than) 800 μ A (20 $^{\circ}$ C 400 V 5 min)	
	Ripple current (MAX)		820 mArms (120Hz , 105 $^{\circ}$ C)	
	Load life		2000 hrs	
Outline	Sleeving pipe basic		PVC	
	(Dimensions)			
	 <p style="text-align: right;">(unit): mm</p>			
Recorder	(The first edition) :2017-4-24			
Wrote by: LUOLI		Checked by: DINGCHANGHUA		Approved by: SHENZHIHONG