

HJ

Snap-in Terminal Type, Miniaturized Series

M

Miniaturized


- Smaller case sizes than HC series
- High CV series
- Load life of 3000 hours at 85°C
- Voltage range of 160 ~ 450V
- Complied to the RoHS directive



Item	Characteristics						
Operating temperature range	WV< 350 : -40 ~ +85°C, WV≥ 350 : -25 ~ +85°C						
Capacitance tolerance	±20% at 120Hz, 20°C						
Leakage current max.	I=3√CV (μA) (after 5 minutes)						
Dissipation factor max. (at 120Hz, 20°C)	Capacitance > 1000μF : tanδ increases by 0.01 for each 1000μF from below value.						
	WV	160	200	250	350	400	450
	tanδ	0.15	0.15	0.15	0.15	0.15	0.20
Load life (after application of the rated voltage for 3000 hours at 85°C)	Leakage current			Less than specified value			
	Capacitance change			Within ±20% of initial value			
	tanδ			Less than 200% of specified value			
Shelf life (at 85°C)	After 1000 hours no load test, leakage current, capacitance and tanδ are same as load life value.						

● DRAWING

Unit : mm

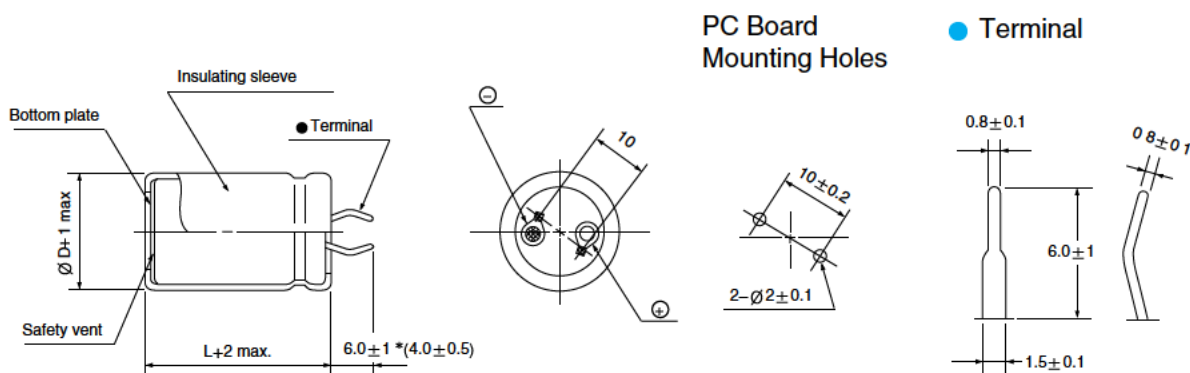

- * Shorter terminal (4.0 ± 0.5) is also available upon request.
Terminal length of height 20mm products is applied shorter terminal to standard terminal type.

● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

μF \ Frequency	50Hz	120Hz	300Hz	1kHz	10kHz~
160 ~ 250	0.85	1.00	1.20	1.25	1.45
300 ~	0.85	1.00	1.15	1.20	1.40

LARGE ALUMINUM ELECTROLYTIC CAPACITORS

HJ series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV μF ØD	160				200				250			
	22	25.4	30	35	22	25.4	30	35	22	25.4	30	35
150									22×20 0.83			
180					22×20 0.91				22×20 0.91			
220					22×20 1.01				22×25 1.09	25.4×20 1.11		
270	22×20 1.12				22×25 1.20	25.4×20 1.23			22×25 1.20	25.4×25 1.32		
330	22×25 1.33	25.4×20 1.36			22×25 1.33	25.4×20 1.36			22×30 1.42	25.4×25 1.46	30×20 1.49	
390	22×25 1.45	25.4×20 1.48			22×25 1.45	25.4×25 1.59	30×20 1.62		22×35 1.63	25.4×30 1.69	30×25 1.73	35×20 1.77
470	22×30 1.69	25.4×25 1.75			22×30 1.69	25.4×25 1.75	30×20 1.78		22×35 1.79	25.4×35 1.96	30×25 1.90	35×20 1.94
560	22×30 1.85	25.4×25 1.91	30×20 1.94		22×35 1.96	25.4×30 2.03	30×25 2.08	35×20 2.12	22×40 2.06	25.4×35 2.14	30×25 2.08	35×25 2.25
680	22×35 2.16	25.4×30 2.23	30×25 2.29	35×20 2.33	22×40 2.27	25.4×30 2.23	30×25 2.29	35×25 2.33	22×50 2.49	25.4×40 2.48	30×30 2.43	35×25 2.48
820	22×40 2.50	25.4×30 2.45	30×25 2.52	35×20 2.56	22×45 2.61	25.4×35 2.59	30×30 2.67	35×25 2.73		25.4×45 2.85	30×35 2.81	35×30 2.88
1000	22×45 2.89	25.4×35 2.86	30×30 2.95	35×25 3.01	22×50 3.01	25.4×40 3.01	30×35 3.11	35×30 3.18			30×40 3.26	35×35 3.35
1200	22×50 3.09	25.4×40 3.08	30×30 3.02	35×25 3.08		25.4×45 3.23	30×35 3.18	35×30 3.26			30×45 3.49	35×35 3.43
1500		25.4×45 3.61	30×35 3.56	35×30 3.65			30×45 3.90	35×35 3.83				35×40 4.01
1800			30×40 4.09	35×35 4.20			30×50 4.44	35×40 4.39				35×50 4.76
2200			30×50 4.63	35×40 4.58				35×45 4.77				
2700				35×45 5.29								
3300				35×50 5.77								

WV μF ØD	350				400				450			
	22	25.4	30	35	22	25.4	30	35	22	25.4	30	35
56									22×20 0.51			
68					22×20 0.56				22×20 0.56			
82					22×20 0.62				22×25 0.66	25.4×20 0.68		
100	22×20 0.68				22×25 0.73	25.4×20 0.75			22×25 0.73	25.4×25 0.81		
120	22×25 0.80	25.4×20 0.82			22×25 0.80	25.4×20 0.82			22×30 0.86	25.4×25 0.88	30×20 0.90	
150	22×25 0.90	25.4×25 0.92			22×30 0.90	25.4×25 0.99	30×20 1.01		22×35 1.01	25.4×30 1.05	30×25 1.08	35×20 1.10
180	22×30 1.05	25.4×25 1.08			22×30 1.05	25.4×25 1.08	30×25 1.10		22×35 1.11	25.4×35 1.21	30×25 1.18	35×20 1.20
220	22×30 1.16	25.4×30 1.19	30×25 1.22		22×35 1.23	25.4×30 1.27	30×25 1.30	35×20 1.33	22×40 1.29	25.4×35 1.34	30×25 1.30	35×25 1.41
270	22×35 1.36	25.4×30 1.41	30×25 1.44	35×20 1.47	22×40 1.43	25.4×35 1.49	30×30 1.44	35×25 1.47	22×50 1.57	25.4×40 1.56	30×30 1.53	35×25 1.56
330	22×45 1.58	25.4×35 1.56	30×30 1.60	35×25 1.62	22×50 1.66	25.4×40 1.64	30×30 1.69	35×25 1.73		25.4×45 1.81	30×35 1.78	35×30 1.83
390	22×50 1.80	25.4×40 1.79	30×30 1.84	35×25 1.88		25.4×45 1.88	30×35 1.94	35×30 1.99			30×40 2.03	35×35 2.09
470		25.4×45 2.06	30×35 2.02	35×30 2.06		25.4×50 2.16	30×40 2.23	35×30 2.18			30×45 2.33	35×35 2.29
560		25.4×50 2.46	30×40 2.32	35×35 2.38			30×45 2.55	35×35 2.50				35×40 2.62
680			30×45 2.69	35×35 2.76			30×50 2.92	35×40 2.89				35×50 3.13
820				35×40 3.17				35×50 3.31	← Case size ØD×L (mm) ← Ripple current (Arms) at 85°C, 120Hz			
1000				35×45 3.65								