


Film, Metallized Polypropylene, Safety, KEMET, R46, 4.7 uF, 10%, 560 V, 275 V, 110C, Lead Spacing = 37.5mm

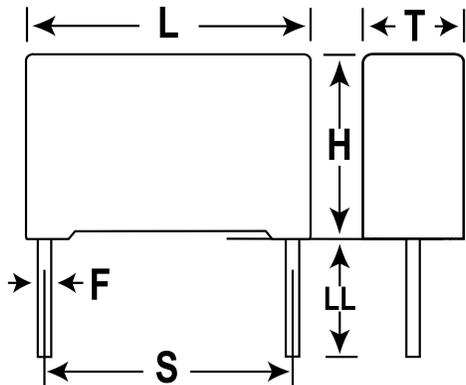

Dimensions

L	41.5mm +0.3mm
H	28.5mm +0.1mm
T	16mm +0.3mm
S	37.5mm +/-0.4mm
LL	4mm +2/-0mm
F	1mm +/-0.05mm

Packaging Specifications

Packaging:	Bulk
Packaging Quantity:	216

General Information

Dielectric:	Metallized Polypropylene
Style:	Radial
Supplier:	KEMET
Series:	R46
Features:	Pulse
RoHS:	Yes
Lead:	Cut

Specifications

Capacitance:	4.7 uF
Capacitance Tolerance:	10%
Voltage DC:	560 VDC
Voltage AC:	275 VAC
Temperature Range:	-40/+110C
Rated Temperature:	110C
Dissipation Factor:	0.1% 1kHz
Max dVdt:	100 V
Safety Class:	X2