

承認書

SPECIFICATION FOR APPROVAL

Manufacturer Part Number: AUP475K2FTX、AUP106K2FTX、AUP206K2FTX、
AUP406K2FTX、AUP606K2FTX

Manufacturer Model : ADP

Manufacturing product name specifications : ADP475K300VAC、ADP106K300VAC、
ADP206K300VAC 、ADP406K300VAC、ADP606K300VAC

Date : 2021.11.05

Customer : Özdisan Elektronik

Date :

✂ PLEASE PAY ATTENTION TO THE STORAGE PROBLEM , AND REFER TO THE FILM
CAPACITORS OPERATING INSTRUCTIONS FOR THE DETAILS
請注意產品的儲存及使用請參考薄膜電容器之使用說明。

製造商	
確 認 Approved	業務擔當 Sales
陳 勝 傑	郭 秀 真

廠商承認		
核 准 Approved	R & D Engineer	採 購 Stock Dept

◎承認蓋章後請寄回承認書一份

◎Please return the book that stamp admitted



AID Electronics Corporation		Specification	
P/N: AUP475K2FTX、AUP106K2FTX AUP206K2FTX、AUP406K2FTX AUP606K2FTX	Ver : 0	Date:05-NOV-21	pages: 1 of 16

Table of Contents 目錄

目錄與規格書版本變更履歷.....	01
**Table of contents and Version change list	
系列料號清單.....	02
**Part No. List	
REACH 證明&產地證明(請自行下載).....	03
**Safety certificate & Certificate of origin(Please download by yourself)	
圖面&電氣特性說明	04
**Drawing & electrical characteristics description	
薄膜電容器技術規範/料號編碼&外觀印字&尺寸.....	05~06
Technical specification for Capacitors/Part Number Code & Appearance Printing& Size	
產品編號&薄膜電容器結構.....	07
**Product number & structure of film capacitor	
溫度和頻率特性.....	08
Temperature and frequency characteristics	
塑膠殼&環氧樹脂(UL94-V0)證明.....	09~10
Plastic shell & epoxy resin (UL94-V0) certification	
物質安全料表.....	11~15
**MSDS	
塑膠薄膜電容器的使用上注意事項及指導.....	16
**Guideline of notabilia for the usage of plastic film capacitors	

規格書版本更新履歷

Datasheet Version update list

Version 版本	Update content 變更內容	Update Date 變更日期	Remark 備註



AID Electronics Corporation		Specification	
P/N: AUP475K2FTX、AUP106K2FTX AUP206K2FTX、AUP406K2FTX AUP606K2FTX	Ver : 0	Date:05-NOV-21	pages: 2 of 16

ADP 系列承認書

NO	客戶料號 Customer Part Number	規格 specification	料號 Part No
1		ADP475K300VAC	AUP475K2FTX
2		ADP106K300VAC	AUP106K2FTX
3		ADP206K300VAC	AUP206K2FTX
4		ADP406K300VAC	AUP406K2FTX
5		ADP606K300VAC	AUP606K2FTX
6			
7			
8			
9			
10			
11			
12			
13			
14			
15			
16			
17			
18			
19			
20			




AID Electronics Corporation		Specification	
P/N: AUP475K2FTX、AUP106K2FTX AUP206K2FTX、AUP406K2FTX AUP606K2FTX		Ver : 0	Date:05-NOV-21
		pages: 3 of 16	

MAKER	VERSION	DATE	REVISED DESCRIPTION
劉亦婷	0	05-NOV-21	Issued  Adobe Acrobat Document "UL" Safety certificate(Openable)  Adobe Acrobat Document "REACH"(Openable)  Adobe Acrobat Document " Certificate of origin" (Openable)
APPROVAL		CHECK	FORMULATE
陳 勝 傑		蔡 育 君	劉 亦 婷



AID Electronics Corporation		Specification	
P/N: AUP475K2FTX、AUP106K2FTX AUP206K2FTX、AUP406K2FTX AUP606K2FTX	Ver : 0	Date:05-NOV-21	pages: 4 of 16

Metallized Polypropylene Film Capacitor.
TYPE : ADP475K/300VAC、ADP106K/300VAC
ADP206K/300VAC、ADP406K/300VAC
ADP606K/300VAC

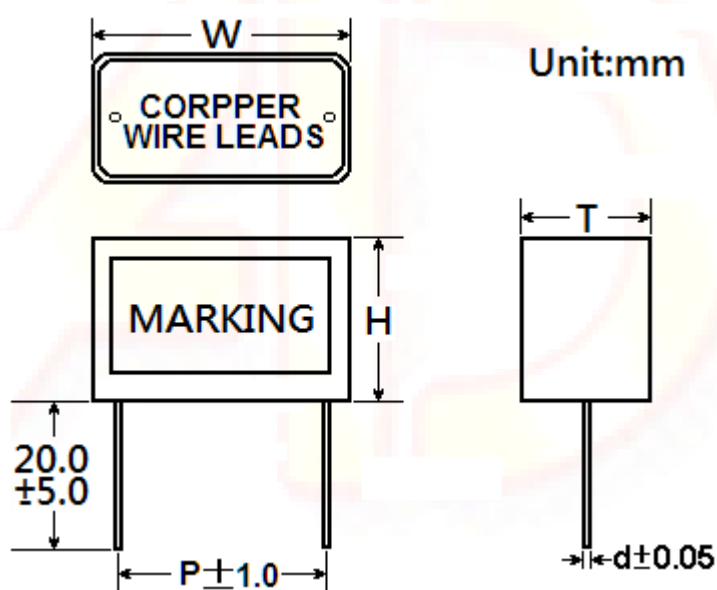

TYPE	ADP	
DIMENSIONS	Unit	mm
CAPACITANCE	μF	4.7、10、20、40、60
Voltage	VAC	300
Min. Insulation Resistance	IR	More than 1000MΩ

AID ELECTRONICS CORPORATION
NO.65, LANE 667,CHANG SAN ROAD, SHENG KUNG, TAICHUNG, TAIWAN, R.O.C
TEL : 886-4-25620100 FAX : 886-4-25629657

AID ELECTRONICS CORPORATION



AID Electronics Corporation		Specification	
P/N: AUP475K2FTX、AUP106K2FTX AUP206K2FTX、AUP406K2FTX	Ver : 0	Date:05-NOV-21	pages: 5 of 16

http : // www.aid.com.tw/

E-mail : sales2@aid.com.tw

- 1.Part Name: Metallized Polypropylene Film Capacitor.
- 2.Type: ADP (Plastic Case / CU Lead Wires)
- 3.Working Voltage:300(2F)VAC
- 4.Capacitance Range:4.7 μ F、10 μ F、20 μ F、40 μ F、60 μ F
- 5.Capacitance Range Tolerance: K ($\pm 10\%$)
- 6.Temperature Range: - 25°C-- +85°C
- 7.Flame retardant plastic case & the Flame retardant resin : PBT 94-V0
- 8.Characteristics

ARTICLE	APPLICATION ITEM	CHARACTERSTICS	TEST METHOD
1.	Dielectric Strength (Test voltage between terminals and case)	No damage	R.V $\times\sqrt{2}\times 175\%$ VDC For 2 Sec 25°C
	Test voltage between terminals and case		Applied rated voltage $\times 2 + 1000$ VAC (minimum2000VAC) For 1 minute.
2.	Insulation Resistance (Between Terminals)	More than 1000M Ω	Measured at 100VDC after 1 minute.
3.	Capacitance	Within the specification	Measured with frequency 1Khz and AC voltage less than 2.5V.
4.	Dissipation factor	$\tan \delta < 0.2\%$	
5.	Vibration	No opening and short happened No damage in element junction and appearance.	10 – 55Hz 1.5 mm amplitude 3 direction 2H Per direction. 0.8-1.0
6.	Solder ability	Good tinning ,by eye measurement more than 3/4 of circumference is covered with new solder	Solder temp. 260°C $\pm 5^\circ$ C dwell time 3 $\pm$ 0.5 Sec
7.	Cold	Capacitance change within + 3 -0% of 25°C	At - 25°C no Voltage applied



AID Electronics Corporation		Specification	
P/N: AUP475K2FTX、AUP106K2FTX AUP206K2FTX、AUP406K2FTX		Ver : 0	Date:05-NOV-21
			pages: 6 of 16

8.	Heat	Capacitance change within + 0 -5% of 25°C	At + 85°C no Voltage applied
----	------	--	---------------------------------

ARTICLE	APPLICATION ITEM	CHARACTERSTICS	TEST METHOD
9.	Humidity life test	Appearance : No damage Dielectric strength :No damage IR : > 30% of initial value cap. change ≤5% of initial value tanδ < 0.15%	Temp . and humidity 40°C 90 - 95% R.H. for five cycles for 8Hr. then keep 16H under room temp.
10.	Heat life test	Appearance : no damage IR : > 50% of Specified Value cap. change : ≤5% of initial value tanδ < 0.15%	Add 125% of W.V. 85°C in chamber for 3,000H then keep 16H under room temp for continuous test. Add 140% of W.V 85°C in chamber for on/off test for one hundred thousand times and then keep 16H under room temp.
12.	Sort test	Appearing : No damage Dielectric strength : No damage Capacitance : within the specification D.F : within the specification	R.V×√2×175% VDC For 2 Sec 25°C
13.	Epoxy resin filled (UL94-V0)	Epoxy resin can not to overflow the bottom of plastic case.	By venire measurement

8. Marking

- w.v.
- Capacitance
- Capacitance tolerance
- Trading mark

ADP TYPE
4.7μF± 10%300V.AC
-25°C ~ +85°C
E197934 50/60Hz
AID ELECT.CORP.,
YY.MM

ADP TYPE
10μF± 10%300V.AC
-25°C ~ +85°C
E197934 50/60Hz
AID ELECT.CORP.,
YY.MM

9. Terminal & Dimension

ADP TYPE
20μF± 10%300V.AC
-25°C ~ +85°C
E197934 50/60Hz
AID ELECT.CORP.,
YY.MM

ADP TYPE
40μF± 10%300V.AC
-25°C ~ +85°C
E197934 50/60Hz
AID ELECT.CORP.,
YY.MM

ADP TYPE
60μF± 10%300V.AC
-25°C ~ +85°C
E197934 50/60Hz
AID ELECT.CORP.,
YY.MM

PART NO.	VOLTAGE	CAPACITANCE		DIMENSION(Tolerance±1.0mm)				
		SYMBOL	μF	W	T	H	P	d




AID Electronics Corporation			Specification	
P/N: AUP475K2FTX、AUP106K2FTX AUP206K2FTX、AUP406K2FTX AUP606K2FTX		Ver : 0	Date:05-NOV-21	pages: 7 of 16

AUP475K2FTX	300VAC	475	4.7	32.0	14.0	25.0	27.5	0.8
AUP106K2FTX	300VAC	106	10	32.0	18.0	33.0	27.5	0.8
AUP206K2FTX	300VAC	206	20	51.0	22.0	34.0	45.0	1.0
AUP406K2FTX	300VAC	406	40	58.0	34.0	44.0	52.0	1.0
AUP606K2FTX	300VAC	606	60	60.0	36.0	55.0	52.0	1.0

10. (AID) PART NO.

HOW TO ORDER(AIDComputer CODE)

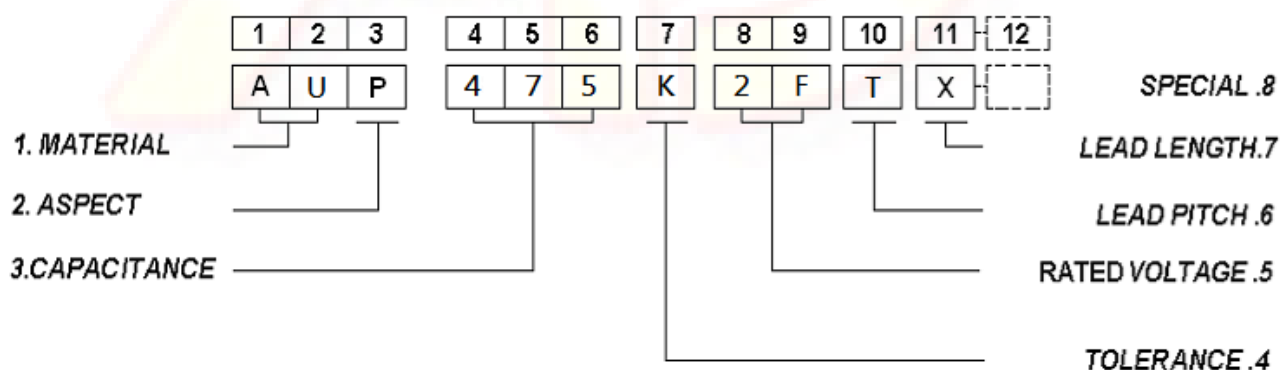

Winding scheme



--- Metallized Polypropylene

--- Metallized Polypropylene



AID Electronics Corporation		Specification	
P/N: AUP475K2FTX、 AUP106K2FTX AUP206K2FTX、 AUP406K2FTX AUP606K2FTX	Ver : 0	Date:05-NOV-21	pages: 8 of 16




TEMPERATURE AND FREQUENCY CHARACTERISTICS





AID Electronics Corporation		Specification	
P/N: AUP475K2FTX、AUP106K2FTX AUP206K2FTX、AUP406K2FTX		Ver : 0	Date:05-NOV-21
		pages: 9 of 16	


Temperature Characteristics

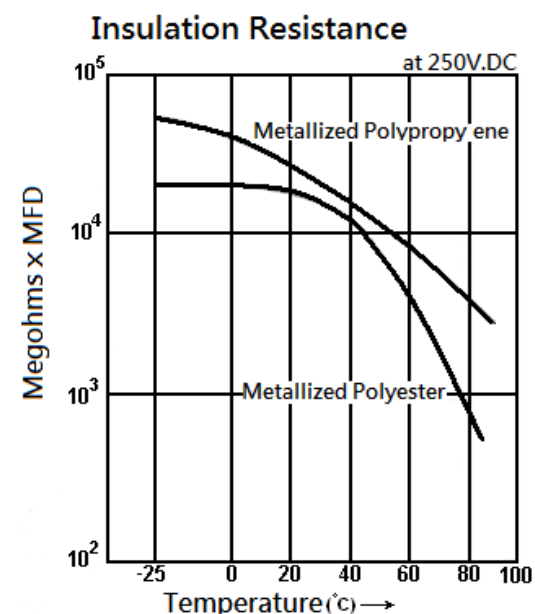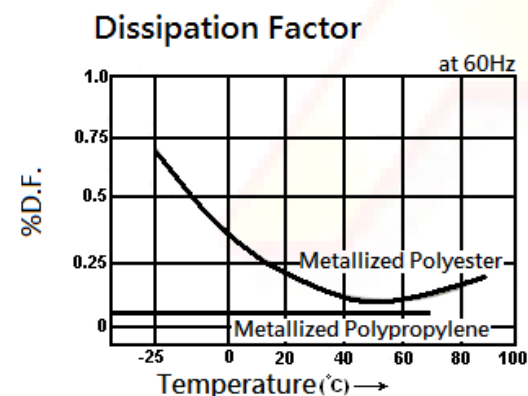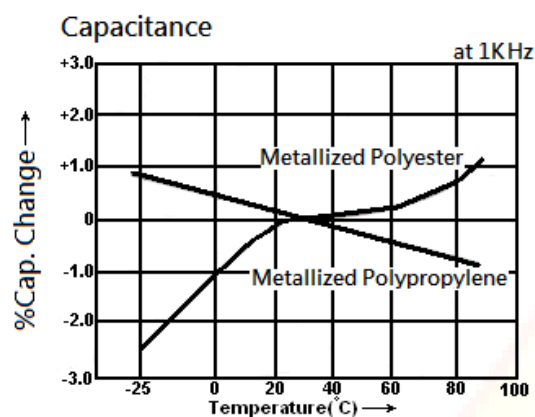

Endurance


Temperature Rise (Capacitor Surface)

Tested at: Max. permissible temp.(w/o air circulation)
 1.1 x rated voltage (60Hz)
 Sample : 250~500VAC, 6uF

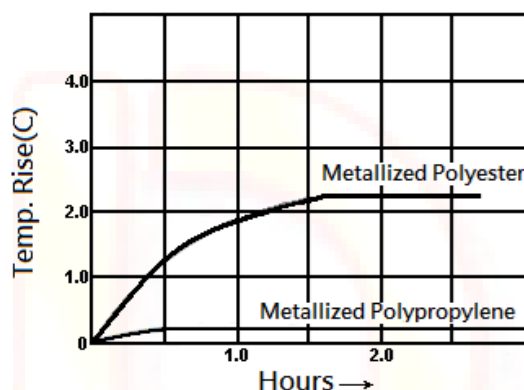


Continuous Endurance : Capacitance Change

250~500VAC, 6uF n=20
 70°C~85°C 60Hz

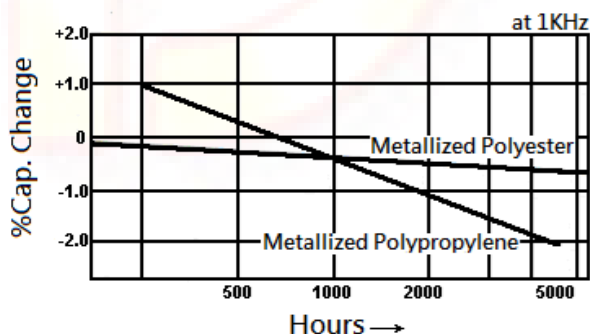

Continuous Endurance : Dissipation Factor Change

250~500VAC, 6uF n=20
 70°C~85°C 60Hz

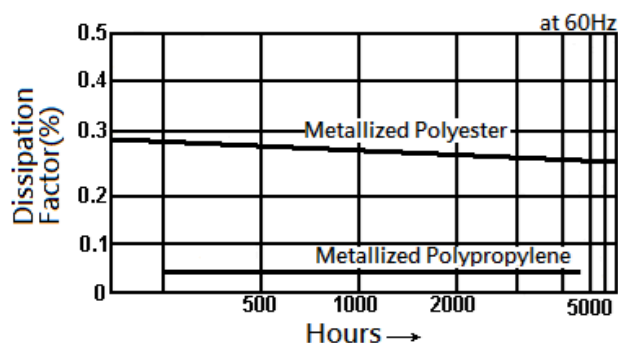



AID Electronics Corporation		Specification	
P/N: AUP475K2FTX、AUP106K2FTX AUP206K2FTX、AUP406K2FTX AUP606K2FTX	Ver : 0	Date:05-NOV-21	pages: 10 of 16

UL Online Certifications Directory

[OCD Home](#) [Quick Guide](#) [Contact Us](#) [UL.com](#)

QMFZ2.E154421

Plastics - Component

Additional information regarding this certification can be found in UL's iQ Family of Databases
(www.ul.com/iq).

NEW -- for additional information concerning the individual material, click on the material designation.

[Page Bottom](#)

Plastics - Component

[See General Information for Plastics - Component](#)

KO HO CHEMICAL CO LTD

E154421

13 ERH KAN RD

SAN KAN HSIANG WAI PU

TAI CHUNG, 438 TAIWAN

									H	D	
		Min.		H	H	R T I		V	4	C	
		Thk	Flame	W	A	Elec	Mech		T	9	T
Material Dsg	Color	mm	Class	I	I		Imp	Str	R	5	I
Epoxy Potting Compound (EP - Potting), "Epoxy Resin", furnished as two liquid components.											
9824(#) A/B	ALL	0.78	V-0	-	-	90	90	90			

(#) - May be replaced with two alphanumeric characters designating color.

Marking: Company name and material designation on container, wrapper or finished part.

[Last Updated](#) on 2008-08-26



AID Electronics Corporation			Specification	
P/N: AUP475K2FTX、AUP106K2FTX AUP206K2FTX、AUP406K2FTX AUP606K2FTX	Ver : 0	Date:05-NOV-21	pages: 11 of 16	

**QMFZ2.E130155
Plastics – Component**

[Guide Information](#)

NAN YA PLASTICS CORP
PLASTICS 4TH DIV
3RD FL
201 TUNG HWA NORTH RD
TAIPEI, TAIWAN

E130155

									H	D	
		Min.		H	H	R T I			V	4	C
		Thk	Flame	W	A	Elec	Mech		T	9	T
Material Dsg	Color	mm	Class	I	I		Imp	Str	R	5	I
Polybutylene Terephthalate (PBT), furnished as pellets.											
1100F, 1101FA, 1101FB, 1110F, 1111FA, 1111FB											
1403G3	ALL	0.75	V-0	4	0	130	130	140	—	—	—

(a)-May be followed by a number or letter indicating glass fiber content 5-30%.

(b)-May be followed by a number or letter indicating glass fiber content 15-30%.

(c)-May be followed by a letter indicating glass fiber content 1-45%.

(d)-May be followed by a letter indicating glass fiber content 1-25%.

(e)-May be followed by a letter indicating glass fiber content 1-30%.

(f1)-Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and Immersion in accordance with UL 746C.

(g)-May be followed by a letter indicating glass fiber content 15-45%.

(h)-May be followed by a letter indicating glass fiber content 1-50%

Marking: Company name and material designation on container, wrapper or finished part.

MSDS 物質安全資料表

AID ELECTRONICS CORPORATION



AID Electronics Corporation		Specification	
P/N: AUP475K2FTX、AUP106K2FTX AUP206K2FTX、AUP406K2FTX	Ver : 0	Date:05-NOV-21	pages: 12 of 16

一、物品與廠商資料/Product and Company Identification

物品名稱：電容器 Product Name Capacitors
物品編號：AUP475K2FTX、AUP106K2FTX、AUP206K2FTX、AUP406K2FTX、AUP606K2FTX Product Code
製造商或供應商名稱、地址及電話： Address & Tel. of Manufacturer or Agent 愛得電子股份有限公司 台灣台中市神岡區中山路 667 巷 65 號/886-4-25620100
緊急聯絡電話/傳真電話： Emergency Phone Number/Fax TEL:886-4-25620100 FAX:886-4-25629657

二、成份辨識資料/Composition, Information on Ingredients

成分名稱 Component Chemical Name & Common Name :		化學文摘登記號碼 CAS No. :	濃度(成分百分比) Concentration(Percentage) :
部件名稱 Part Name	組成物質 Constituents		
素子 Element	鋅 Zinc	7440-66-6	0.93%
	鋁 Tin	7429-90-5	0.07%
	PP 基膜 Basement membrane	9003-07-0	99.0%
噴金層 Spray gold layer	錫鋅 Tin zinc	7440-66-6	44.65%
	鋅 zinc	7440-31-5	55.35%
引腳 Pin (AMP187)	錫 Tin	7440-50-8	4.0%
	銅 Copper	7440-31-5	96.0%
環氧樹脂 Epoxy resin (UL94-V0)	環氧樹脂 A Epoxy resin A	25068-38-6	100.00%
		21645-51-2	
		6833-79-9	
	環氧樹脂 B Epoxy resin B	9046-10-0	20.00%
		69-72-7	
		84-74-2	
塑膠殼 Plastic shell (PBT)	UL94-V0	26062-94-2	68%
		1592-23-0	0.5%
		68928-70-1	10%
		1309-64-4	5%
		65997-17-3	16.5%

三、危害辨識資料/ Hazard Identification



AID Electronics Corporation		Specification	
P/N: AUP475K2FTX、AUP106K2FTX AUP206K2FTX、AUP406K2FTX AUP606K2FTX	Ver : 0	Date:05-NOV-21	pages: 13 of 16

最重要危害效應 Most Important Health Hazards and Reactions	健康危害效應/Health Hazards and Reactions : No
	環境影響/Environmental Impact : No
	物理性及化學性危害/Physical and Chemical Hazards : No
	特殊危害/Specific Hazards : No
主要症狀/Cardinal Symptoms : No	
物品危害分類/Hazard Classification : No	

四、急救措施/ First Aid Measures

不同暴露途徑之急救方法/ First Aid Measures for Different Kinds of Exposures : ·吸入/Inhalation : No ·皮膚接觸/Skin Contact : No ·眼睛接觸/Eye Contact : No ·食入/Ingestion : No
最重要症狀及危害效應/Most Important Symptoms and Hazard Reactions : No
對急救人員之防護/Protection to First-Aid Attendants : No
對醫師提示/Suggestions to Doctors : No

五、滅火措施/ Firefighting Measures

適用滅火劑/Suitable Extinguishing Media : 乾粉滅火劑、二氧化碳滅火劑/Dry powder fire extinguishing agent, carbon dioxide fire extinguishing agent
滅火時可能遭遇之特殊危害/Special Hazards in Fire : No
特殊滅火程式/Special Fire - Fighting Procedures : No
消防人員之特殊防護設備/Required Special Protective Equipment for Fire-Fighters : No

六、洩漏處理方式/Accidental Release Measures

個人應注意事項/ Personal Precautions : No
環境注意事項/Environmental Precautions : No
清理方法/Methods for Cleaning : No

七、安全處置與儲存方法/ Handling and Storage

AID ELECTRONICS CORPORATION



AID Electronics Corporation		Specification	
P/N: AUP475K2FTX、AUP106K2FTX AUP206K2FTX、AUP406K2FTX AUP606K2FTX	Ver : 0	Date:05-NOV-21	pages: 14 of 16

處置/Handling：濕度在 75%以下/ Humidity is below 75%

儲存/ Storage：常溫≤35℃濕度在 75%以下/ Room temperature≤35℃, humidity below 75%

八、暴露預防措施/ Exposure Controls, Personal Protection

工程控制/ Engineering Measures：

控制參數/ Control Parameters：

·八小時日時量平均容許濃度(TWA)/短時間時量平均容許濃度(STEL)/最高容許濃度(CEILING)：無資料
Eight-hour daily hourly average allowable concentration (TWA)/short-time hourly average allowable concentration (STEL)/maximum allowable concentration (CEILING): no data

·生物指標/ BEIs：無資料

Biometrics/BEIs: No data

個人防護設備/ Personal Protection Equipment：

·呼吸防護/Respiration：No

手部防護/Hand：防護手套；

·眼睛防護/Eye：護目鏡

·皮膚及身體防護/Skin & Body：無眼睛防護/Eye：No

衛生措施/Hygiene Measures：No

九、物理及化學性質/ Physical and Chemical Properties

物質狀態/ State of Substance：固態/ Solid state	形狀/Appearance：固態/ Solid state
顏色/Color：藍色/ Blue	氣味/Odor：無味/ Tasteless
pH 值/pH Value：-	沸點/沸點範圍/Boiling Point：260℃
分解溫度/Decomposing Temperature：260℃	開火點：- Flashpoint 測試方法：開杯閉杯 Test Methods：Open Slot Close slot
自燃溫度/Self-lighting Temperature：-	爆炸界限/Explosion Limits：-
蒸氣壓/Vapor Pressure：-	蒸氣密度/Vapor Density：-
密度/Density：1.14	溶解度/Dissolution：-

十、安定性及反應性/Stability and Reactivity



AID Electronics Corporation		Specification	
P/N: AUP475K2FTX、AUP106K2FTX AUP206K2FTX、AUP406K2FTX	Ver : 0	Date:05-NOV-21	pages: 15 of 16

安定性/Stability : 安定/ stable

特殊狀況下可能之危害反應/Possible Hazard Reaction Under Special Conditions : No

應避免之狀況/Conditions to Avoid : No

應避免之物質/Materials to Avoid : No

危害分解物/Hazardous Decomposition Products : No

十一、毒性資料/ Toxicological Information

急毒性/Acute Toxicity : No

局部效應/Local Reactions : No

敏感性/Sensitivity : No

慢毒性或長期毒性/Chronicons Long-term Toxicity : No

特殊效應/Special Reactions : No

8mg/kg(懷孕 8-15 的雌鼠

IARC 將之列為 Group1

ACGIH 將之列為 A2 :

十二、生態資料/ Ecological information

可能之環境影響/環境流布/Possible Environmental Impact/Environmental Run-offs : No

十三、廢棄處置方法/Disposal considerations

可廢棄處置方法/Disposal Methods : 回收再生使用/回收公司回收再生使用/廢棄
Recycling/recycling company recycling/disposing

十四、運送資料/Transport information

國際運送規定/International Transportation Regulations : 無資料/ No data

聯合國編號/Referencing. : 無資料

國內運送規定/Domestic Transportation Regulations : 無資料/ No data

特殊運送方法及注意事項/Special Transportation Methods and Precautions : 無資料/ No data

十五、法規資料/Regulatory information



AID Electronics Corporation		Specification	
P/N: AUP475K2FTX、AUP106K2FTX AUP206K2FTX、AUP406K2FTX AUP606K2FTX	Ver : 0	Date:05-NOV-21	pages: 16 of 16

適用法規/Applicable Regulation : 無資料/ No data

十六、其它資料/Other information

適用法規/Applicable Regulation：無資料/ No data		
參考文獻 Ref. Document	No	
製表單位 Department	名稱/Dept. Name：工程部/ Engineering Department	
	地 址 / 電 話 Address/Tel.：台 灣 台 中 市 神 岡 鄉 中 山 路 667 巷 65 號 /886-4-25620100	
	職稱/Title：工程師/ Engineer	姓名(簽單) Name(Signature)：林士豪
製表日期 Date Prepared	Date:05-NOV-21	



AID Electronics Corporation		Specification	
P/N: AUP475K2FTX、AUP106K2FTX AUP206K2FTX、AUP406K2FTX	Ver : 0	Date:05-NOV-21	pages: 17 of 16

Guideline of notabilia for the usage of plastic film capacitors

塑膠薄膜電容器的使用上注意事項及指導

Plastic film capacitors use organic films for their dielectrics, thus the capacitors may fume of flame, depending on the circuit Conditions they are in, when they are damaged by applying over-voltage or over-current.

塑膠薄膜電容器使用有機薄膜為介質，當使用超過額定電壓及額定電流，可能產生火焰，導致電容損壞，故請使用於正確的迴路。

1. Circuit Design 迴路設計

- ① Please use capacitors within the range of their characteristic ratings, only after confirming their operating and mounting environments.
請確認電容器的使用範圍僅止於明定之額定特性規範，請先確認電容器使用之環境是否符合規範。
- ② In case of selecting a capacitor, please select the most suitable one which fits to your operating conditions.
請依照適合的作業條件選擇相對應的電容器使用。
- ③ Capacitors used for Across-The-Line, Line-By-Pass and Antenna-Coupling to suppress noises in an equipment, the capacitors need to be approved by overseas Safety Standards or 'Electric Appliance and Material Control' by Ministry of international trade and Industry.
電容器用於跨接，旁路迴路及天線耦合等抑制噪音的裝置，需通過海外安全標準或日本通商產業省之電器用品安全法。
- ④ An applying voltage to a capacitor, including the peak of surge and ripple voltage (D.C. voltage + A.C. Peak), cannot be exceeded therating voltage.
電容器之應用電壓，包括突波和紋波電壓的峰值(直流電壓+交流峰值)不可超過額定電壓。
- ⑤ Do not apply a current over its permissible level. Also, make sure the check the surrounding temperature and inherent temperature rise of a capacitor since a permissible current can be restricted by those factors.
切勿使用超出電容器可承載之電流並檢查電容器周圍之溫度，因有許多因素會影響電流之變化，進而造成電容器之溫度上升。
- ⑥ Please contact AID for further details, if mechanical resonance (hum) occurs to a capacitor.
如電容器的發出共振(嗡嗡)之噪音時，請與AID聯繫。
- ⑦ Do not conduct a rapid charge and discharge to a capacitor which may lead to characteristics degradations or break down of the capacitor.
請不要對電容器進行快速的充電和放電，此可能會導致電容器之特性退化或損壞。

2. Mounting 安裝

- ① Do not apply any exceeding tension or torsion to lead wires of a capacitor, during the mounting process.
請不要使用任何超過電容導線可承受之張力進行插件。
- ② Please mount a capacitor where it dose not contact any other heating parts, high voltage parts and other parts.
請確認電容器使用環境，避免接觸任何其他升溫熱物件,高壓和其他部分料件。
- ③ Please conduct soldering process by strictly following the specified conditions.
進行焊接過程實，請嚴格遵循指定之焊接條件。

3. Case of an emergency 緊急情況

- ① If a fuming, a flaming or an usual smell occurs from an equipment during its usage, please cut off the power supply by switching It off, pulling the plug out or other methods.
如使用設備有冒煙，火花或冒出不尋常之氣味，請切斷電源，拔掉插頭或以其它方法關閉設備。

4. Storing and handling 儲存和處理

- ① A storage needs to be kept indoors at -10 ~ +40°C and relative humidity of under 75% without any sudden temperature changes, direct sunlight and corrosive gas around.
需保存於-10 ~ 40°C，相對濕度低於75%並確保沒有任何突然的溫度變化，避免直接陽光之曝曬及接觸腐蝕性氣體之環境。



AID Electronics Corporation		Specification	
P/N: AUP475K2FTX、AUP106K2FTX AUP206K2FTX、AUP406K2FTX AUP606K2FTX	Ver : 0	Date:05-NOV-21	pages: 18 of 16

- ② Do not apply and exceeding vibration, shock (dropping) and pressure.
不應過度震動、碰撞和及外力的衝擊。

5. Rejection 報廢

- ① In case of rejecting capacitors, please seek for professionals who deal with the industrial wastes treatments.
對於報廢電容器，請找處理工業廢品之專業人士處理。

