

Product Data sheet : Current Transformer- CT1202-RC

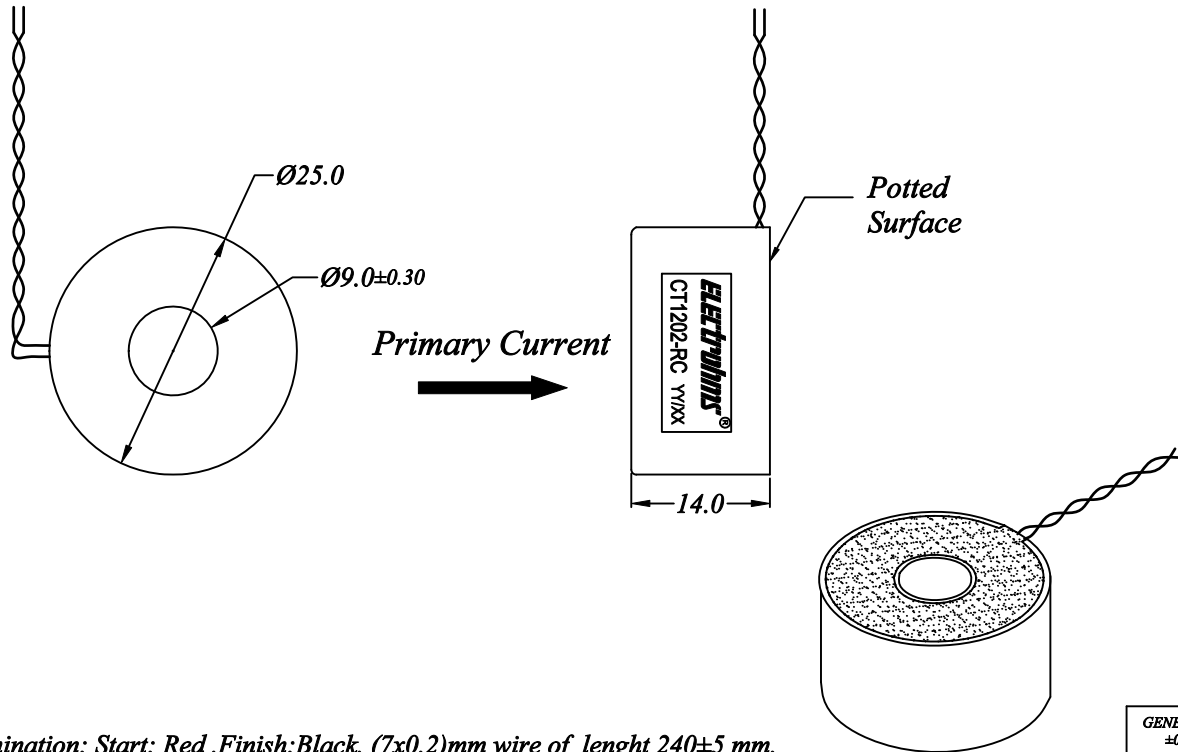
Date : 28.08.2010

Rev : 03

Page 1 of 1

Customer: Standard Type

Customer's part No.: ---

MECHANICAL DIMENSIONS**Pb RoHS Compliant**

GENERAL TOL. ±0.5 mm	
ALL DIMENSIONS ARE IN 'mm'	SCALE -NTS

SPECIFICATIONS @ 25° C **

PARAMETERS	VALUES
Current	40 Arms
Frequency of Operation	50/60 Hz
D C R	38-46 Ω
Turns Ratio	1 : 1000
Recommended Secondary Burden	100 Ω (Resistive)
Amplitude Error	---
Phase Error	---
Inductance @ 0.3 Vrms, 100Hz, Lp	≥ 35 H
Operating Temperature	-20°C to + 70°C.

**** Specifications subject to change.****All materials used in the manufacture of this product are RoHS Compliant.****Note :**

Amplitude error and Phase error values are guaranteed with recommended Secondary burden. Refer to ELECTROHMS Product Design Group for use of burden other than recommended Secondary burden.

Electrohms Pvt. Ltd.,
Unit 1: #67/6-1, Ullas Theatre Road,
Industrial suburb,
Yeshwanthpur,
Bengaluru - 560 022, India.

www.electrohms.com
e-mail: sales@electrohms.com

Unit 2: #129 EPIP 2nd phase,
KIADB Industrial area,
Whitefield,
Bengaluru - 560 066, India.