
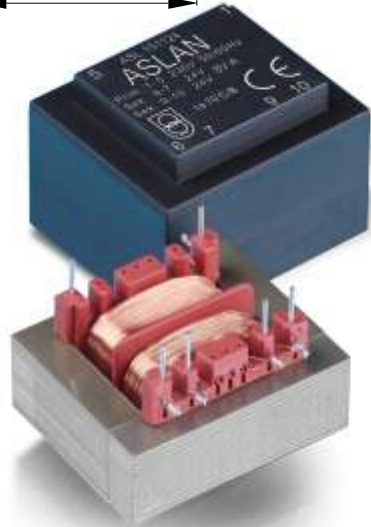


Özellikleri

VDE 0570 / EN 61558 Normuna
Göre Vakum Dolgulu İki Bölmeli
Sarımlı İzolasyon Sınıfı 70° C/B
Ağırlığı 252 Gr.

Characteristic

According to VDE 0570 / EN 61558
Potted under vacuum Split-Bobbin
winding Insulation Class ta 70° C/B
Weight 252 Gr.

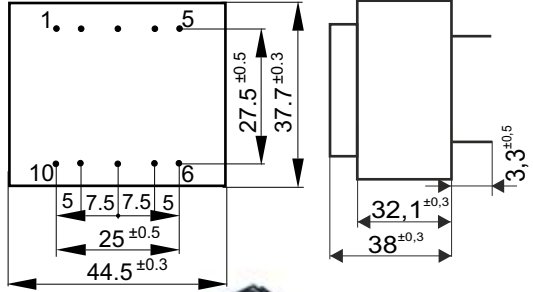

SİPARİŞ KODU Order No.	PRİMER [V] Primary	SEKONDER [V] Secondary	AKIM [mA] Current	PİM ARALIĞI Pim	BOŞTAKİ VOLTAJI [V] No- Load Voltage
ASL 151106	230V~	6	1333	1 - 5 / 7 - 9	7,7
ASL 151108	230V~	7,5	1066	1 - 5 / 7 - 9	9,7
ASL 151109	230V~	9	888	1 - 5 / 7 - 9	11,5
ASL 151112	230V~	12	666	1 - 5 / 7 - 9	15,3
ASL 151115	230V~	15	533	1 - 5 / 7 - 9	19,2
ASL 151118	230V~	18	444	1 - 5 / 7 - 9	23,1
ASL 151124	230V~	24	333	1 - 5 / 7 - 9	30,7
ASL 151206	230V~	2 x 6	2 x 666	1-5/6-7,9-10	2 x 7,7
ASL 151208	230V~	2 x 7,5	2 x 533	1-5/6-7,9-10	2 x 9,9
ASL 151209	230V~	2 x 9	2 x 444	1-5/6-7,9-10	2 x 11,8
ASL 151212	230V~	2 x 12	2 x 333	1-5/6-7,9-10	2 x 15,5
ASL 151215	230V~	2 x 15	2 x 266	1-5/6-7,9-10	2 x 19,4
ASL 151218	230V~	2 x 18	2 x 222	1-5/6-7,9-10	2 x 23,3
ASL 151224	230V~	2 x 24	2 x 166	1-5/6-7,9-10	2 x 30,9