


Encapsulated Safety Isolating Transformer

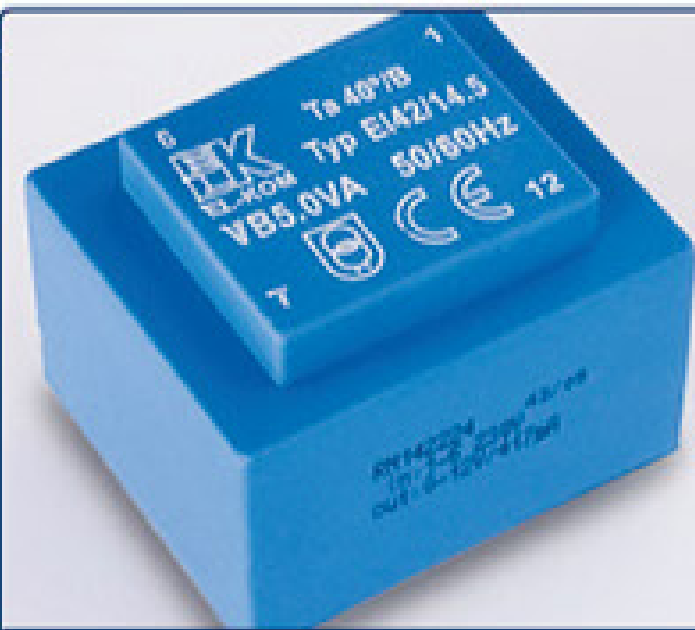

5.0VA

Type **EI 42/14.5**

Electrical Parameters

Input

Primary Voltage	230 Vac
Frequency	50-60 Hz

Output

Output Power	5.0 VA
--------------	--------

Environment

Ambient Temperature Max.	40°C
--------------------------	------

Safety and Protection

Protection Index	IP 00
Safety Class	II
Short Circuit Strength	Non Short-Circuit Proof

Test

Test Voltage	4000V / 50 Hz (Between Input and Output)
--------------	---

Design

Features	Potted Under Vacuum Split-Bobbin Winding
Acc. to	VDE 0570 EN 61558

Mechanical Parameters

Terminal and Mounting

Terminals	Pins for printed circuit boards
-----------	---------------------------------

Measures

Pin [Ø]	0.8 mm
Core Type	EI 42/14.5

Detailed Electrical Parameters

EI-Kom Code	Secondary [V]	Current [A]	No-Load [Output]	Pin Pr/Sec
RN142221	6	0,833	7,50	1-6/8-11
RN142222	7,5	0,667	9,38	1-6/8-11
RN142223	9	0,556	11,25	1-6/8-11
RN142224	12	0,417	15,00	1-6/8-11
RN142225	15	0,333	18,75	1-6/8-11
RN142226	18	0,278	22,50	1-6/8-11
RN142227	24	0,208	30,00	1-6/8-11
RN142228	30	0,167	37,50	1-6/8-11
RN142241	2 x 6	2 x 0,417	2 x 7,50	1-6/7-8,11-12
RN142242	2 x 7,5	2 x 0,333	2 x 9,38	1-6/7-8,11-12
RN142243	2 x 9	2 x 0,278	2 x 11,25	1-6/7-8,11-12
RN142244	2 x 12	2 x 0,208	2 x 15,00	1-6/7-8,11-12
RN142245	2 x 15	2 x 0,167	2 x 18,75	1-6/7-8,11-12
RN142246	2 x 18	2 x 0,139	2 x 22,50	1-6/7-8,11-12
RN142247	2 x 24	2 x 0,104	2 x 30,00	1-6/7-8,11-12

Technical Drawing

