


EI60/30.5 32VA

Özellikleri

VDE 0570 / EN 61558 Normuna
Göre Vakum Dolgulu İki Bölmeli
Sarımlı İzolasyon Sınıfı **70° C/B**
Ağırlığı 780 Gr.

Characteristic

According to **VDE 0570 / EN 61558**
Potted under vacuum Split-Bobbin
winding Insulation Class ta **70° C/B**
Weight 780 Gr.

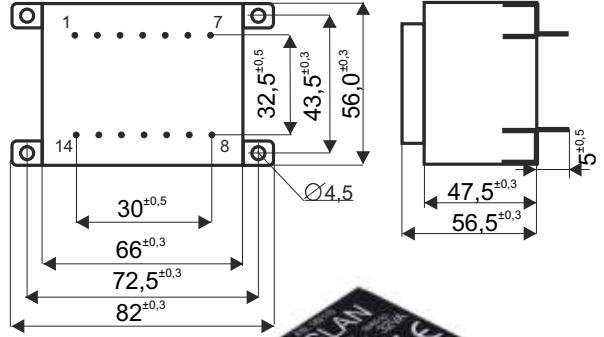

SİPARİŞ KODU Order No.	PRİMER [V] Primary	SEKONDER [V] Secondary	AKIM [mA] Current	PİM ARALIĞI Pim	BOŞTAKI VOLTAJI [V] No-Load Voltage
ASL 182106	230V~	6	5333	1 - 7 / 10 - 12	6,8
ASL 182108	230V~	7,5	4260	1 - 7 / 10 - 12	8,6
ASL 182109	230V~	9	3555	1 - 7 / 10 - 12	10,2
ASL 182112	230V~	12	2666	1 - 7 / 10 - 12	13,7
ASL 182115	230V~	15	2133	1 - 7 / 10 - 12	17,1
ASL 182118	230V~	18	1777	1 - 7 / 10 - 12	20,5
ASL 182124	230V~	24	1333	1 - 7 / 10 - 12	27,4
ASL 182206	230V~	2 x 6	2 x 2666	1-7 / 8 - 9, 13 - 14	2 x 7,0
ASL 182208	230V~	2 x 7,5	2 x 2130	1-7 / 8 - 9, 13 - 14	2 x 8,6
ASL 182209	230V~	2 x 9	2 x 1777	1-7 / 8 - 9, 13 - 14	2 x 10,4
ASL 182212	230V~	2 x 12	2 x 1333	1-7 / 8 - 9, 13 - 14	2 x 14,0
ASL 182215	230V~	2 x 15	2 x 1066	1-7 / 8 - 9, 13 - 14	2 x 17,4
ASL 182218	230V~	2 x 18	2 x 888	1-7 / 8 - 9, 13 - 14	2 x 20,7
ASL 182224	230V~	2 x 24	2 x 666	1-7 / 8 - 9, 13 - 14	2 x 27,6