
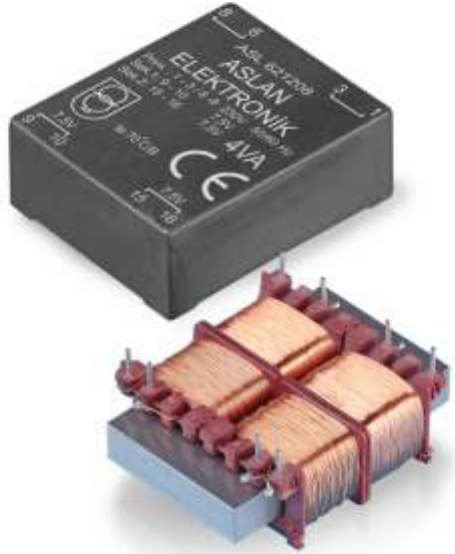


Özellikleri

VDE 0570 / EN 61558 Normuna
Göre Vakum Dolgulu İki Bölmeli
Sarımlı İzolasyon Sınıfı **70° C/B**
Ağırlığı 150 Gr.

Characteristic

According to **VDE 0570 / EN 61558**
Potted under vacuum Split-Bobbin
winding Insulation Class ta **70° C/B**
Weight 150 Gr.

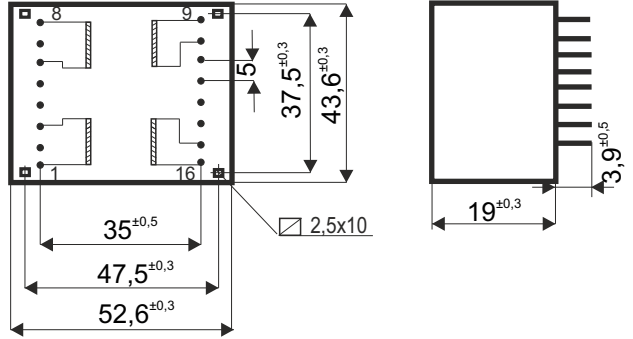

SİPARİŞ KODU Order No.	PRİMER [V] Primary	SEKONDER [V] Secondary	AKIM [mA] Current	PİM ARALIĞI Pim	BOŞTA Kİ VOLTAJI [V] No-Load Voltage
ASL 621206	2 x 115V~	2 x 6	2 x 333	1-3,6-8/9-10,15-16	2 x 9,2
ASL 621208	2 x 115V~	2 x 7,5	2 x 266	1-3,6-8/9-10,15-16	2 x 11,4
ASL 621209	2 x 115V~	2 x 9	2 x 222	1-3,6-8/9-10,15-16	2 x 13,7
ASL 621212	2 x 115V~	2 x 12	2 x 166	1-3,6-8/9-10,15-16	2 x 17,9
ASL 621215	2 x 115V~	2 x 15	2 x 133	1-3,6-8/9-10,15-16	2 x 22,4
ASL 621218	2 x 115V~	2 x 18	2 x 111	1-3,6-8/9-10,15-16	2 x 24,0
ASL 621224	2 x 115V~	2 x 24	2 x 83	1-3,6-8/9-10,15-16	2 x 35,4