


### Özellikleri

VDE 0570 / EN 61558 Normuna  
Göre Vakum Dolgulu İki Bölmeli  
Sarımlı İzolasyon Sınıfı 70° C/F  
Ağırlığı 145Gr.

### Characteristic

According to VDE 0570 / EN 61558  
Potted under vacuum Split-Bobbin  
winding Insulation Class ta 70° C/F  
Weight 145 Gr.

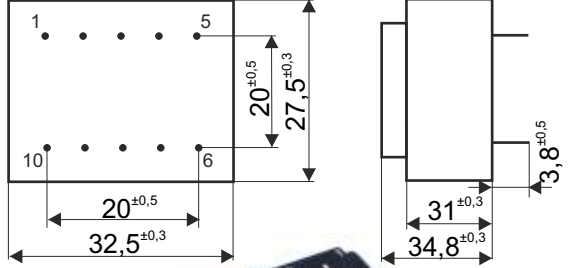

SİPARİŞ KODU Order No.	PRİMER [V] Primary	SEKONDER [V] Secondary	AKIM [mA] Current	PİM ARALIĞI Pim	BOŞTAKI VOLTAJI [V] No-Load Voltage
ASL 106106	230V~	6	433	1- 5 / 7- 9	10,0
ASL 106108	230V~	7,5	326	1- 5 / 7- 9	11,5
ASL 106109	230V~	9	288	1- 5 / 7- 9	14,5
ASL 106112	230V~	12	216	1- 5 / 7- 9	20,0
ASL 106115	230V~	15	173	1- 5 / 7- 9	23,5
ASL 106118	230V~	18	144	1- 5 / 7- 9	29,1
ASL 106124	230V~	24	108	1 5 / 7 9	36,3
ASL 106206	230V~	2 x 6	2 x 216	1- 5 / 6- 7, 9- 10	2 x 10,2
ASL 106208	230V~	2 x 7,5	2 x 173	1- 5 / 6- 7, 9- 10	2 x 11,5
ASL 106209	230V~	2 x 9	2 x 144	1- 5 / 6- 7, 9- 10	2 x 14,9
ASL 106212	230V~	2 x 12	2 x 108	1- 5 / 6- 7, 9- 10	2 x 19,3
ASL 106215	230V~	2 x 15	2 x 86	1- 5 / 6- 7, 9- 10	2 x 24,3
ASL 106218	230V~	2 x 18	2 x 72	1- 5 / 6- 7, 9- 10	2 x 29,3
ASL 106224	230V~	2 x 24	2 x 54	1- 5 / 6- 7, 9- 10	2 x 37,0