


# Type **EI 42/14,5** Output Power **5,4 VA**

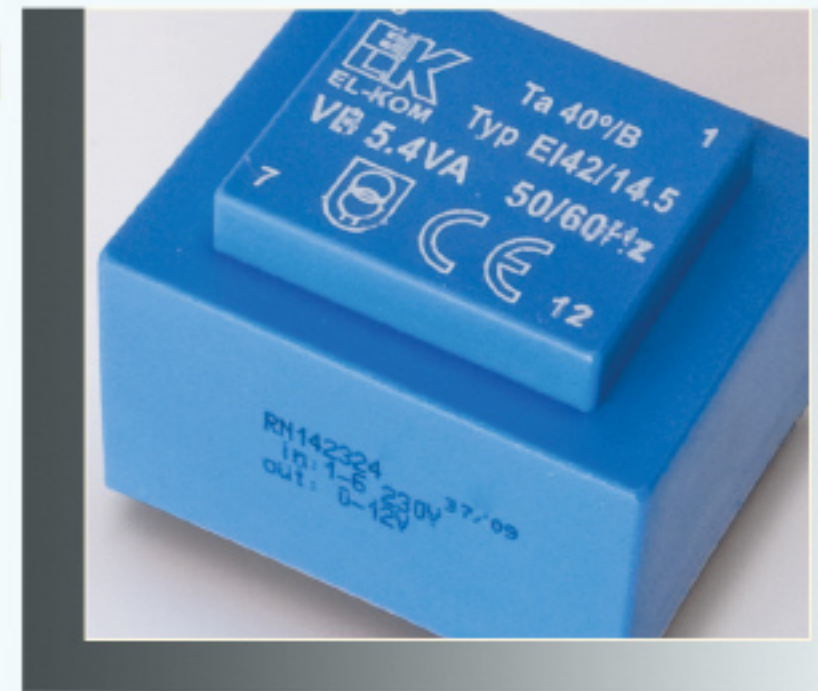


## Specifications

Potted under vacuum | Split-Bobbin Winding  
**Design** : acc. to VDE 0570, EN 61558  
**Safety Class** : II  
**Protection Index** : IP 00  
**Ambient Temp.** : ta=40°C  
**Test Voltage** : 4000V/50Hz  
 (between input & output)

**Primary** : 230 V

## Dimensions (mm) Pin: Ø 0,8

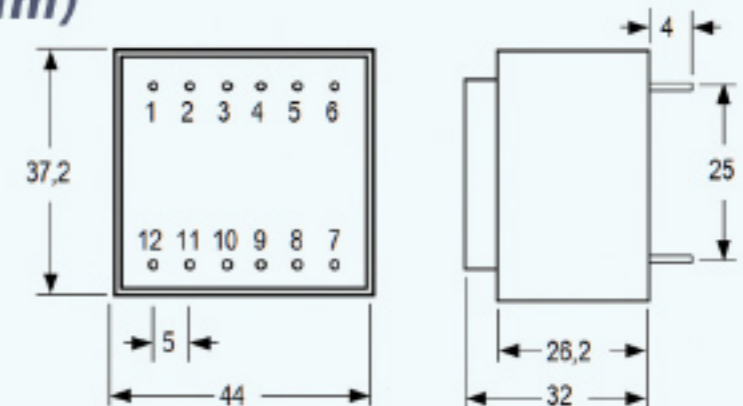

EI-Kom Code	Secondary [V]	Current [A]	No-Load [Output]	Pin Pr/Sec
RN142321	6	0,900	7,50	1-6/8-11
RN142322	7,5	0,720	9,38	1-6/8-11
RN142323	9	0,600	11,25	1-6/8-11
RN142324	12	0,450	15,00	1-6/8-11
RN142325	15	0,360	18,75	1-6/8-11
RN142326	18	0,300	22,50	1-6/8-11
RN142327	24	0,225	30,00	1-6/8-11
RN142328	30	0,180	37,50	1-6/8-11
RN142341	2 x 6	2 x 0,450	2 x 7,50	1-6/7-8,11-12
RN142342	2 x 7,5	2 x 0,360	2 x 9,38	1-6/7-8,11-12
RN142343	2 x 9	2 x 0,300	2 x 11,25	1-6/7-8,11-12
RN142344	2 x 12	2 x 0,225	2 x 15,00	1-6/7-8,11-12
RN142345	2 x 15	2 x 0,180	2 x 18,75	1-6/7-8,11-12
RN142346	2 x 18	2 x 0,150	2 x 22,50	1-6/7-8,11-12
RN142347	2 x 24	2 x 0,113	2 x 30,00	1-6/7-8,11-12