

JQX-60F

Features

- 60A Contact Change-over Capacity
- Swift Connection
- With Opening and dust-proof Type




JQX-60F



JQX-60F



Power Relay

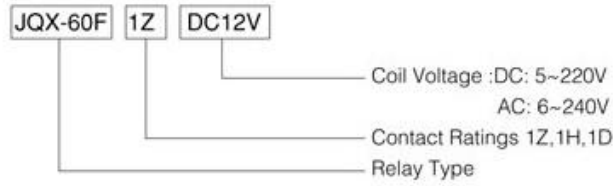

Contact Ratings

Contact Ratings	1Z, 1H, 1D
Contact Resistance	100mΩ(1A 6VDC)
Contact Material	AgCdO
Contact capacity	60A, 70A, 80A 250VAC/30VDC

Specification

Insulation Resistance	1000MΩ 500VDC
Dielectric Strength	BCC 2500V 1 min
	BOC 1200V 1 min
Operate Time	25ms/25ms
Terminal Type	Screw


Coil Ratings

Nominal Coil Power	DC: 2.0W AC: 2.5VA
--------------------	--------------------

Coil Versions

Nominal Voltage VDC	Pull-in Voltage VDC	Release Voltage VDC	Coil Resistance Ω: ±10%	Nominal Voltage VAC	Pull-in Voltage VAC	Release Voltage VAC	Coil Resistance Ω: ±10%
6	4.80	0.60	20	6	4.80	1.80	14.4
12	9.60	1.20	45	12	9.60	3.60	57
24	19.2	2.40	320	24	19.20	7.20	250
48	38.4	4.80	1280	48	38.40	14.4	921
60	48.0	6.00	2800	110	88.00	36.0	5000
110	88.0	11.0	9650	220/240	176.00	72.0	19600/25040

Dimension. Bottom View

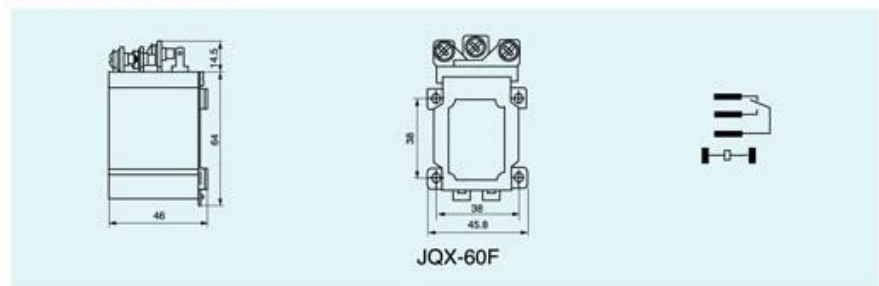

Reference Data

