





RT625



RT625 AMA




Specification

| | | | |
|----------------------------|---------------------|---------------|--------|
| Rated load | Current / Voltage | AVAC | 10/300 |
| Dielectric strength | Coil/Contact | V/S | 4000 |
| | Between contacts | V/S | 2500 |
| External connection wire | AWG/mm ² | 20-14/0.5-2.5 | |
| Screw torque | Nm | 0.8 | |
| Terminal protection degree | | IP20 | |


Matched relay

| Socket model | Relay model | Metal Clip | Module | DIN clip |
|--------------|------------------|-------------|------------|----------|
| RT625 | JQX-14FC/14FF 2Z | B-25C K-25C | AMA Series | |
| | JQX-14FL 2Z | | | |
| | JQX-14FL 1Z 16A | B-20L K-20L | | |
| | JQX-115F 2Z | | | |
| | JQX-115F 1Z 16A | B-15F K-15F | | |


Outline dimension, Wiring diagram

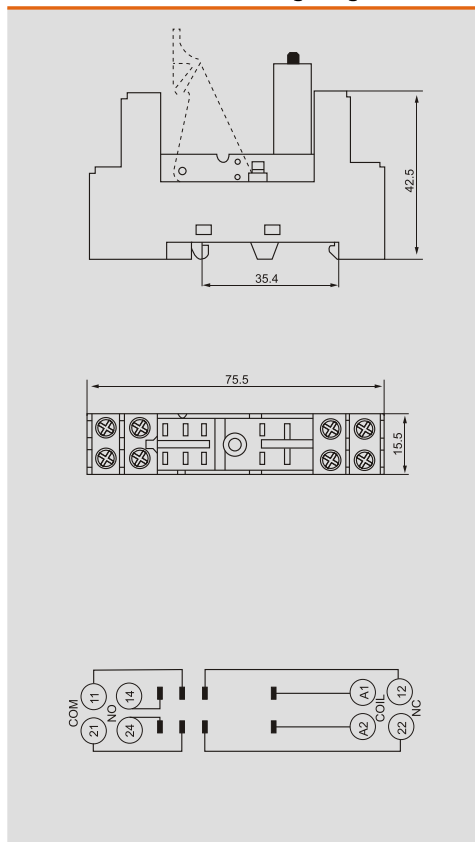

RT625-B



RT625-B AMB



Specification

| | | | |
|----------------------------|---------------------|---------------|--------|
| Rated load | Current / Voltage | AVAC | 10/300 |
| Dielectric strength | Coil/Contact | V/S | 4000 |
| | Between contacts | V/S | 2500 |
| External connection wire | AWG/mm ² | 20-14/0.5-2.5 | |
| Screw torque | Nm | 0.8 | |
| Terminal protection degree | | IP20 | |

Matched relay

| Socket model | Relay model | Metal Clip | Module | DIN clip |
|--------------|------------------|-------------|------------|----------|
| RT625-B | JQX-14FC/14FF 2Z | B-25C K-25C | AMB Series | |
| | JQX-14FL 2Z | | | |
| | JQX-14FL 1Z 16A | B-20L K-20L | | |
| | JQX-115F 2Z | | | |
| | JQX-115F 1Z 16A | B-15F K-15F | | |

Outline dimension, Wiring diagram

